



(12) **United States Patent**
McKibben et al.

(10) **Patent No.:** **US 7,925,246 B2**
(45) **Date of Patent:** **Apr. 12, 2011**

(54) **RADIO/TELEPHONY INTEROPERABILITY SYSTEM**

455/403; 379/45, 37, 42; 370/260, 259, 261, 262

See application file for complete search history.

(75) Inventors: **Michael T McKibben**, Columbus, OH (US); **Jeffrey R. Lamb**, Westerville, OH (US); **Paul L. Petronelli**, San Jose, CA (US)

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,714,989 A 12/1987 Billings
(Continued)

FOREIGN PATENT DOCUMENTS

WO WO/00/06220 10/2000
(Continued)

OTHER PUBLICATIONS

Stephen Volda, et al., "Integrating Virtual and Physical Context to Support Knowledge Workers," IEEE Pervasive Computing, Sep. 2002, pp. 73-79, vol. 1, No. 3.

(Continued)

Primary Examiner — Ajit Patel

Assistant Examiner — Khai M Nguyen

(74) *Attorney, Agent, or Firm* — Taft Stettinius & Hollister LLP

(57) **ABSTRACT**

A radio/telephony interoperability architecture that facilitates intercommunications between a security services network, elected officials and/or emergency services network and a telephony management system for one-way and two-way security and/or emergency teleconferencing communications. The telephony system creates a session in which one or more session participants can communicate with front-line mobile radio operators (e.g., first responder personnel) and radio band components. Mobile radio systems can be accessed via circuit-switched and packet-switched networks with communications capable of existing between horizontal services entities (e.g., city fire and police) and vertical entities (e.g., city, state, and federal agencies and personnel). Furthermore, the presence of participants and potential participants is provided to authorized users to facilitate the establishment of such conferences. Notifications and alarms are used to alert participants and potential participants of important events.

5 Claims, 28 Drawing Sheets

(73) Assignee: **Leader Technologies, Inc.**, Lewis Center, OH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1014 days.

(21) Appl. No.: **11/257,487**

(22) Filed: **Oct. 24, 2005**

(65) **Prior Publication Data**

US 2006/0080344 A1 Apr. 13, 2006

Related U.S. Application Data


(63) Continuation-in-part of application No. 10/979,611, filed on Nov. 2, 2004, which is a continuation-in-part of application No. 10/731,906, filed on Dec. 10, 2003, now abandoned, and a continuation-in-part of application No. 10/732,744, filed on Dec. 10, 2003, now Pat. No. 7,139,761.

(60) Provisional application No. 60/621,704, filed on Oct. 25, 2004, provisional application No. 60/516,307, filed on Nov. 3, 2003, provisional application No. 60/432,257, filed on Dec. 11, 2002, provisional application No. 60/432,255, filed on Dec. 11, 2002.

(51) **Int. Cl.**
H04M 3/42 (2006.01)

(52) **U.S. Cl.** **455/416; 455/404.1; 455/404.2; 455/403; 455/414.1; 370/260; 370/259; 370/261; 370/262**

(58) **Field of Classification Search** **455/414.1, 455/414.2, 521, 518, 519, 416, 404.1, 404.2,**

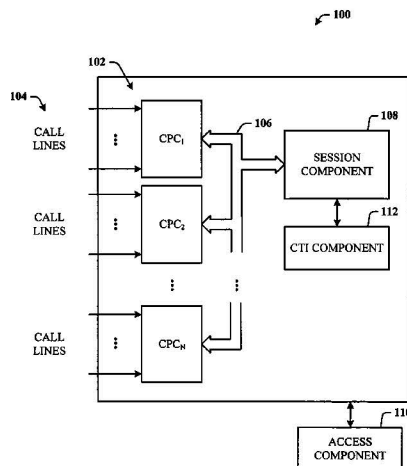

U.S. PATENT DOCUMENTS							
5,274,806	A	12/1993	Hill	6,233,577	B1	5/2001	Ramasubramani et al.
5,394,526	A	2/1995	Crouse et al.	6,233,600	B1	5/2001	Salas et al.
5,416,917	A	5/1995	Adair et al.	6,236,994	B1	5/2001	Swartz et al.
5,495,607	A	2/1996	Pisello et al.	6,240,415	B1	5/2001	Blumberg
5,530,857	A	6/1996	Gimza	6,240,416	B1	5/2001	Immon et al.
5,664,126	A	9/1997	Hirakawa et al.	6,253,199	B1	6/2001	Wakio et al.
5,675,784	A	10/1997	Maxwell et al.	6,260,040	B1	7/2001	Kauffman et al.
5,678,042	A	10/1997	Pisello et al.	6,263,330	B1	7/2001	Bessette et al.
5,680,615	A	10/1997	Marlin et al.	6,263,342	B1	7/2001	Chang et al.
5,699,526	A	12/1997	Siefert	6,266,669	B1	7/2001	Brodersen et al.
5,737,495	A	4/1998	Adams et al.	6,269,380	B1	7/2001	Terry et al.
5,740,424	A	4/1998	Wataya et al.	6,289,345	B1	9/2001	Yasue
5,758,351	A	5/1998	Gibson et al.	6,289,384	B1	9/2001	Whipple et al.
5,761,661	A	6/1998	Coussens et al.	6,289,385	B1	9/2001	Whipple et al.
5,765,155	A	6/1998	Nakamura	6,289,460	B1	9/2001	Hajmiragha
5,778,370	A	7/1998	Emerson	6,292,796	B1	9/2001	Drucker et al.
5,781,911	A	7/1998	Young et al.	6,292,830	B1	9/2001	Taylor et al.
5,787,412	A	7/1998	Bosch et al.	6,298,347	B1	10/2001	Wesley et al.
5,806,069	A	9/1998	Wakiyama et al.	6,308,175	B1	10/2001	Lang et al.
5,809,238	A	9/1998	Greenblatt et al.	6,308,179	B1	10/2001	Petersen et al.
5,819,084	A	10/1998	Shapiro et al.	6,314,425	B1	11/2001	Serbinis et al.
5,826,265	A	10/1998	Van Huben et al.	6,321,231	B1	11/2001	Jebens et al.
5,835,911	A	11/1998	Nakagawa et al.	6,327,594	B1	12/2001	Van Huben et al.
5,845,281	A	12/1998	Benson et al.	6,330,569	B1	12/2001	Baisley et al.
5,852,810	A	12/1998	Sotiroff et al.	6,332,155	B1	12/2001	Notani
5,859,972	A	1/1999	Subramaniam et al.	6,334,146	B1	12/2001	Parasnis et al.
5,862,325	A	1/1999	Reed et al.	6,336,099	B1	1/2002	Barnett et al.
5,864,875	A	1/1999	Van Huben et al.	6,339,771	B1	1/2002	Zimowski et al.
5,870,746	A	2/1999	Knutson et al.	6,341,291	B1	1/2002	Bentley et al.
5,873,083	A	2/1999	Jones et al.	6,343,290	B1	1/2002	Cossins et al.
5,873,103	A	2/1999	Trede et al.	6,345,288	B1	2/2002	Reed et al.
5,887,171	A	3/1999	Tada et al.	6,351,761	B1	2/2002	Cantone et al.
5,930,772	A	7/1999	Gomyo et al.	6,353,819	B1	3/2002	Edwards et al.
5,930,801	A	7/1999	Falkenhainer et al.	6,353,820	B1	3/2002	Edwards et al.
5,933,835	A	8/1999	Adams et al.	6,356,893	B1	3/2002	Itakura et al.
5,940,829	A	8/1999	Tsuiki et al.	6,356,909	B1	3/2002	Spencer
5,950,201	A	9/1999	Van Huben et al.	6,363,388	B1	3/2002	Sprenger et al.
5,956,720	A	9/1999	Fernandez et al.	6,370,538	B1	4/2002	Lamping et al.
5,956,728	A	9/1999	Federighi et al.	6,374,236	B1	4/2002	Chen et al.
5,956,732	A	9/1999	Tsuchida	6,374,246	B1	4/2002	Matsuo
5,966,707	A	10/1999	Van Huben et al.	6,381,628	B1	4/2002	Hunt
5,978,779	A	11/1999	Stein et al.	6,381,735	B1	4/2002	Hunt
5,978,803	A	11/1999	Ooe	6,385,624	B1	5/2002	Shinkai
5,978,804	A	11/1999	Dietzman	6,389,426	B1	5/2002	Turnbull et al.
6,026,402	A	2/2000	Vossen et al.	6,389,538	B1	5/2002	Gruse et al.
6,026,403	A	2/2000	Siefert	6,389,589	B1	5/2002	Mishra et al.
6,029,161	A	2/2000	Lang et al.	6,393,421	B1	5/2002	Paglin
6,029,174	A	2/2000	Sprenger et al.	6,397,191	B1	5/2002	Notani et al.
6,035,297	A	3/2000	Van Huben et al.	6,397,192	B1	5/2002	Notani et al.
6,041,325	A	3/2000	Shah et al.	6,398,245	B1	6/2002	Gruse et al.
6,049,799	A	4/2000	Mangat et al.	6,415,289	B1	7/2002	Williams et al.
6,058,395	A	5/2000	Buzaglo et al.	6,418,421	B1	7/2002	Hurtado et al.
6,064,971	A	5/2000	Hartnett et al.	6,418,469	B1	7/2002	Justice et al.
6,065,009	A	5/2000	Leymann et al.	6,434,403	B1	8/2002	Ausems et al.
6,065,014	A	5/2000	Wakio et al.	6,434,562	B1	8/2002	Pennywitt et al.
6,067,549	A	5/2000	Smalley et al.	6,434,682	B1	8/2002	Ashton et al.
6,073,109	A	6/2000	Flores et al.	6,434,745	B1	8/2002	Conley et al.
6,088,693	A	7/2000	Van Huben et al.	6,438,233	B1	8/2002	Yoshimune et al.
6,088,706	A	7/2000	Hild	6,442,528	B1	8/2002	Notani et al.
6,088,717	A	7/2000	Reed et al.	6,446,071	B1	9/2002	Callaway et al.
6,094,654	A	7/2000	Van Huben et al.	6,446,089	B1	9/2002	Brodersen et al.
6,094,675	A	7/2000	Sunaga et al.	6,449,644	B1	9/2002	Ryeng et al.
6,108,646	A	8/2000	Mohri et al.	6,477,533	B2	11/2002	Schiff et al.
6,112,196	A	8/2000	Zimowski et al.	6,484,156	B1	11/2002	Gupta et al.
6,119,149	A	9/2000	Notani	6,484,177	B1	11/2002	Van Huben et al.
6,128,626	A	10/2000	Beauchesne	6,493,702	B1	12/2002	Adar et al.
6,134,552	A	10/2000	Fritz et al.	6,496,828	B1	12/2002	Cochrane et al.
6,157,928	A	12/2000	Sprenger et al.	6,499,137	B1	12/2002	Hunt
6,157,929	A	12/2000	Zamiska et al.	6,505,196	B2	1/2003	Drucker et al.
6,158,001	A	12/2000	Lee et al.	6,516,316	B1	2/2003	Ramasubramani et al.
6,161,146	A	12/2000	Kley et al.	6,532,463	B1	3/2003	Robbins et al.
6,185,565	B1	2/2001	Meubus et al.	6,539,379	B1	3/2003	Vora et al.
6,185,567	B1	2/2001	Ratnaraj et al.	6,539,399	B1	3/2003	Hazama et al.
6,205,480	B1	3/2001	Broadhurst et al.	6,542,515	B1	4/2003	Kumar et al.
6,216,124	B1	4/2001	Wakio et al.	6,542,932	B1	4/2003	Brinnand et al.
6,223,177	B1	4/2001	Tatham et al.	6,556,995	B1	4/2003	Child et al.
6,223,219	B1	4/2001	Uniacke et al.	6,560,639	B1	5/2003	Dan et al.
6,230,312	B1	5/2001	Hunt	6,564,261	B1*	5/2003	Gudjonsson et al. 709/227
				6,567,783	B1	5/2003	Notani et al.

6,567,808	B1	5/2003	Eschelbeck et al.	6,941,307	B2	9/2005	Papanikolaou et al.
6,574,628	B1	6/2003	Kahn et al.	6,941,313	B2	9/2005	Seliger et al.
6,574,629	B1	6/2003	Cooke et al.	6,944,629	B1	9/2005	Shioi et al.
6,574,654	B1	6/2003	Simmons et al.	6,944,662	B2	9/2005	Devine et al.
6,574,655	B1	6/2003	Libert et al.	6,954,757	B2	10/2005	Zargham et al.
6,584,466	B1	6/2003	Serbinis et al.	6,961,751	B1	11/2005	Bates et al.
6,587,854	B1	7/2003	Guthrie et al.	6,970,929	B2	11/2005	Bae et al.
6,604,112	B1	8/2003	Taylor	6,978,265	B2	12/2005	Schumacher
6,612,490	B1	9/2003	Herrendoerfer et al.	6,983,311	B1	1/2006	Haitsuka et al.
6,615,213	B1	9/2003	Johnson	6,983,463	B1	1/2006	Hunt
6,629,123	B1	9/2003	Hunt	6,985,902	B2	1/2006	Wise et al.
6,633,867	B1	10/2003	Kraft et al.	6,988,271	B2	1/2006	Hunt
6,636,874	B1	10/2003	Douceur et al.	6,990,491	B2	1/2006	Dutta et al.
6,643,641	B1	11/2003	Snyder	7,000,235	B2	2/2006	Mandal et al.
6,647,396	B2	11/2003	Parnell et al.	7,010,538	B1	3/2006	Black
6,650,794	B1	11/2003	Aoki	7,016,901	B2	3/2006	Eikenbery
6,654,747	B1	11/2003	Van Huben et al.	7,020,653	B2	3/2006	Idicula et al.
6,658,403	B1	12/2003	Kuroda et al.	7,020,753	B2	3/2006	Shanahan et al.
6,658,415	B1	12/2003	Brown et al.	7,024,425	B2	4/2006	Krishnaprasad et al.
6,665,657	B1	12/2003	Dibachi	7,028,032	B1	4/2006	Diedrich et al.
6,665,658	B1	12/2003	DaCosta et al.	7,028,079	B2	4/2006	Mastrianni et al.
6,665,675	B1	12/2003	Mitaru et al.	7,031,968	B2	4/2006	Kremer et al.
6,675,176	B1	1/2004	Shinkai et al.	7,035,837	B2	4/2006	Reulein et al.
6,675,179	B2	1/2004	Morohashi	7,035,840	B2	4/2006	Nakos et al.
6,678,685	B2	1/2004	McGill et al.	7,036,149	B2	4/2006	Sonoda et al.
6,681,227	B1	1/2004	Kojima et al.	7,039,597	B1	5/2006	Notani et al.
6,681,229	B1	1/2004	Cason et al.	7,039,626	B2	5/2006	Hirata
6,684,212	B1	1/2004	Day et al.	7,039,640	B2	5/2006	Miller et al.
6,684,438	B2	2/2004	Brodersen et al.	7,043,490	B2	5/2006	Choy et al.
6,687,693	B2	2/2004	Cereghini et al.	7,051,031	B2	5/2006	Schein
6,687,710	B1	2/2004	Dey	7,051,039	B1	5/2006	Murthy et al.
6,691,113	B1	2/2004	Harrison et al.	7,054,890	B2	5/2006	Musante et al.
6,691,132	B2	2/2004	Walker et al.	7,058,600	B1	6/2006	Combar et al.
6,694,320	B1	2/2004	Ortiz et al.	7,058,627	B2	6/2006	Wiesler et al.
6,697,811	B2	2/2004	Brodsky	7,062,532	B1	6/2006	Sweat et al.
6,697,821	B2	2/2004	Ziff et al.	7,069,242	B1	6/2006	Sheth et al.
6,701,323	B2	3/2004	Sashino et al.	7,069,271	B1	6/2006	Fadel et al.
6,718,347	B1	4/2004	Wilson	7,069,511	B2	6/2006	Martizen et al.
6,718,361	B1	4/2004	Basani et al.	7,072,894	B2	7/2006	Loy et al.
6,721,726	B1	4/2004	Swaminathan et al.	7,085,764	B2	8/2006	Bangal et al.
6,721,745	B2	4/2004	Monestere	7,089,278	B1	8/2006	Churchill et al.
6,721,747	B2	4/2004	Lipkin	7,092,944	B2	8/2006	Fukuta et al.
6,732,148	B1	5/2004	Estrada et al.	7,092,958	B2	8/2006	Hempstead et al.
6,732,331	B1	5/2004	Alexander	7,092,969	B2	8/2006	Meek et al.
6,738,775	B2	5/2004	Asherman	7,096,222	B2	8/2006	Kern et al.
6,745,188	B2	6/2004	Bradburn	7,099,885	B2	8/2006	Hellman et al.
6,751,613	B1	6/2004	Lee et al.	7,107,268	B1	9/2006	Zawadzki et al.
6,754,681	B2	6/2004	Brodersen et al.	7,111,291	B2	9/2006	Loy et al.
6,757,720	B1	6/2004	Weschler	7,113,883	B1	9/2006	House et al.
6,760,730	B1	7/2004	Kataoka	7,113,946	B2	9/2006	Cosic
6,771,742	B2	8/2004	McCalmont et al.	7,113,999	B2	9/2006	Pestoni et al.
6,772,033	B2	8/2004	Scherer et al.	7,118,024	B1	10/2006	Hoshino
6,772,178	B2	8/2004	Mandal et al.	7,120,632	B2	10/2006	Helmbrecht et al.
6,775,660	B2	8/2004	Lin et al.	7,127,501	B1	10/2006	Beir et al.
6,775,670	B2	8/2004	Bessette	7,130,858	B2	10/2006	Ciaramitaro et al.
6,795,831	B2	9/2004	Hirose et al.	7,134,135	B2	11/2006	Cerami et al.
6,807,542	B2	10/2004	Bantz et al.	7,136,858	B2	11/2006	Malik et al.
6,820,094	B1	11/2004	Ferguson et al.	7,136,912	B2	11/2006	Hotti
6,826,582	B1	11/2004	Chatterjee et al.	7,139,761	B2	11/2006	McKibben et al.
6,826,596	B1	11/2004	Suzuki	7,146,407	B2	12/2006	McNulty et al.
6,829,612	B2	12/2004	Neulight	7,152,080	B2	12/2006	Mikami
6,832,227	B2	12/2004	Seki et al.	7,155,426	B2	12/2006	Al-Azzawe
6,834,289	B2	12/2004	Kaneda et al.	7,155,461	B2	12/2006	Miyata et al.
6,859,798	B1	2/2005	Bedell et al.	7,162,477	B1	1/2007	Mukherjee
6,871,279	B2	3/2005	Sames et al.	7,162,537	B1	1/2007	Kathail
6,873,997	B1	3/2005	Majjasie et al.	7,165,060	B2	1/2007	Foster et al.
6,874,003	B2	3/2005	Morohashi	7,171,411	B1	1/2007	Lewis et al.
6,889,222	B1	5/2005	Zhao	7,181,441	B2	2/2007	Mandato et al.
6,889,232	B2	5/2005	Pudipeddi et al.	7,181,455	B2	2/2007	Wookey et al.
6,898,598	B2	5/2005	Himmel et al.	7,181,507	B1	2/2007	Lavelle et al.
6,898,609	B2	5/2005	Kerwin	7,185,317	B2	2/2007	Fish et al.
6,904,432	B2	6/2005	Charlot et al.	7,194,470	B2	3/2007	Miyawaki et al.
6,912,522	B2	6/2005	Edgar	7,200,638	B2	4/2007	Lake
6,917,962	B1	7/2005	Cannata et al.	7,203,927	B2	4/2007	Al-Azzawe et al.
6,922,687	B2	7/2005	Vernon	7,211,980	B1	5/2007	Bruemmer et al.
6,922,695	B2	7/2005	Skufca et al.	7,224,778	B2	5/2007	Aoki
6,925,462	B2	8/2005	Nishikawa et al.	7,225,183	B2	5/2007	Gardner
6,931,397	B1	8/2005	Sundaresan	7,231,378	B2	6/2007	Lawson et al.
6,938,170	B1	8/2005	Kraft et al.	7,231,407	B2	6/2007	Brodersen et al.

7,237,002	B1	6/2007	Estrada et al.	
7,239,409	B2	7/2007	Parry	
7,243,138	B1	7/2007	Majkut et al.	
7,246,130	B2	7/2007	Goodwin et al.	
7,249,143	B1	7/2007	Bhatia	
7,257,581	B1	8/2007	Steele et al.	
7,257,767	B1	8/2007	Carden, Jr.	
7,260,638	B2	8/2007	Crosbie	
7,269,579	B2	9/2007	Lovegren et al.	
7,269,604	B2	9/2007	Moore et al.	
7,269,625	B1	9/2007	Willhide et al.	
7,277,897	B2	10/2007	Bamford et al.	
7,346,648	B1	3/2008	Seliger	
7,366,990	B2	4/2008	Pitroda	
7,437,312	B2	10/2008	Bhatia et al.	
2003/0208459	A1	11/2003	Shea et al.	
2003/0217096	A1*	11/2003	McKelvie et al.	709/202
2005/0041602	A1*	2/2005	West et al.	370/260
2006/0069726	A1	3/2006	McKibben et al.	
2007/0058573	A1*	3/2007	Schwagmann et al.	370/260
2007/0130599	A1*	6/2007	Monroe	725/105
2010/0273445	A1*	10/2010	Dunn et al.	455/404.1

FOREIGN PATENT DOCUMENTS

WO PCT/US2008/001576 8/2008

OTHER PUBLICATIONS

Dave Banks, et al., "The ePerson Snippet Manager: a Semantic Web Application," Hewlett Packard Publication: HPL-2002-328, Nov. 27, 2002.

Bianco, Matthew, "An Interface for the Visualization and Manipulation of Asynchronous Collaborative Work within the DISCIPLINE System," Graduate Thesis, Jan. 2002.

Paul Dourish, et al, Presto: An Experimental Architecture for Fluid Interactive Document Spaces, ACM Transactions on Computer-Human Interaction, vol. 6-2, 133-61, Jun. 30, 1999.

Paul Dourish, et al., Extending Document Management Systems with User-Specific Active Properties, ACM Transactions on Information Systems, vol. 18-2, 140-70, Apr. 30, 2000.

Marlon Pierce, et al., Interoperable Web Services for Computational Portals, Proceedings of the 2002 ACM/IEEE Conference on Supercomputing, Nov. 22, 2002.

John December, The World Wide Web Unleashed (2d ed. 1995), pp. 329-33.

* cited by examiner

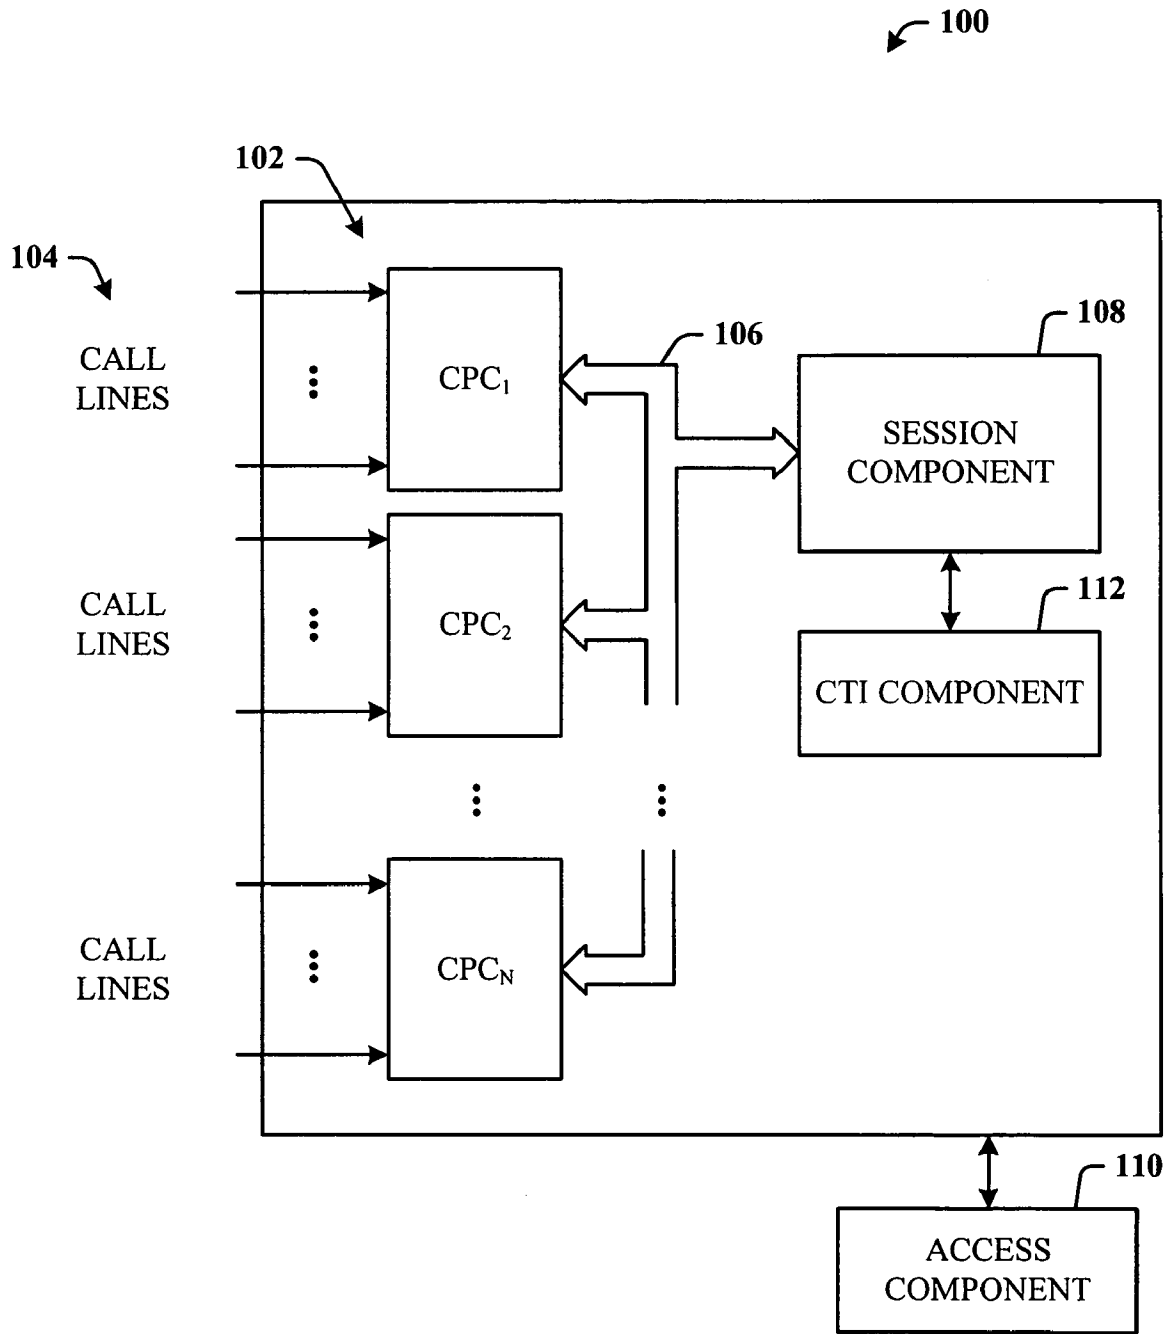


FIG. 1

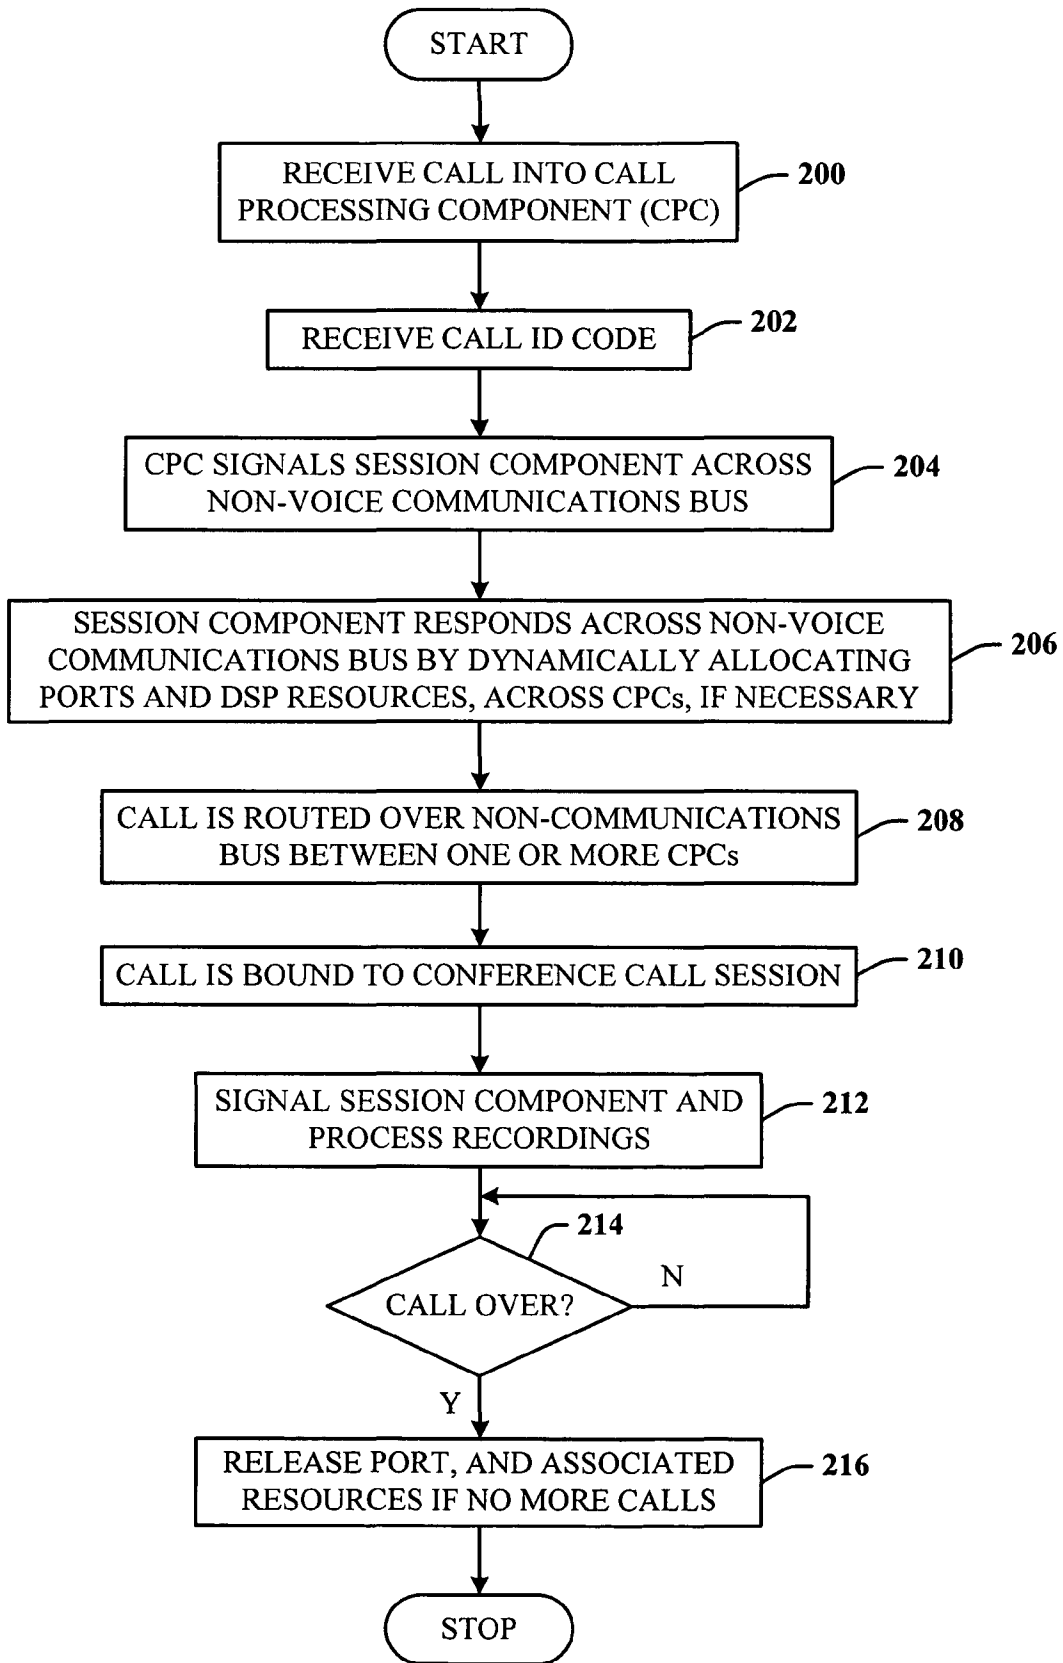


FIG. 2

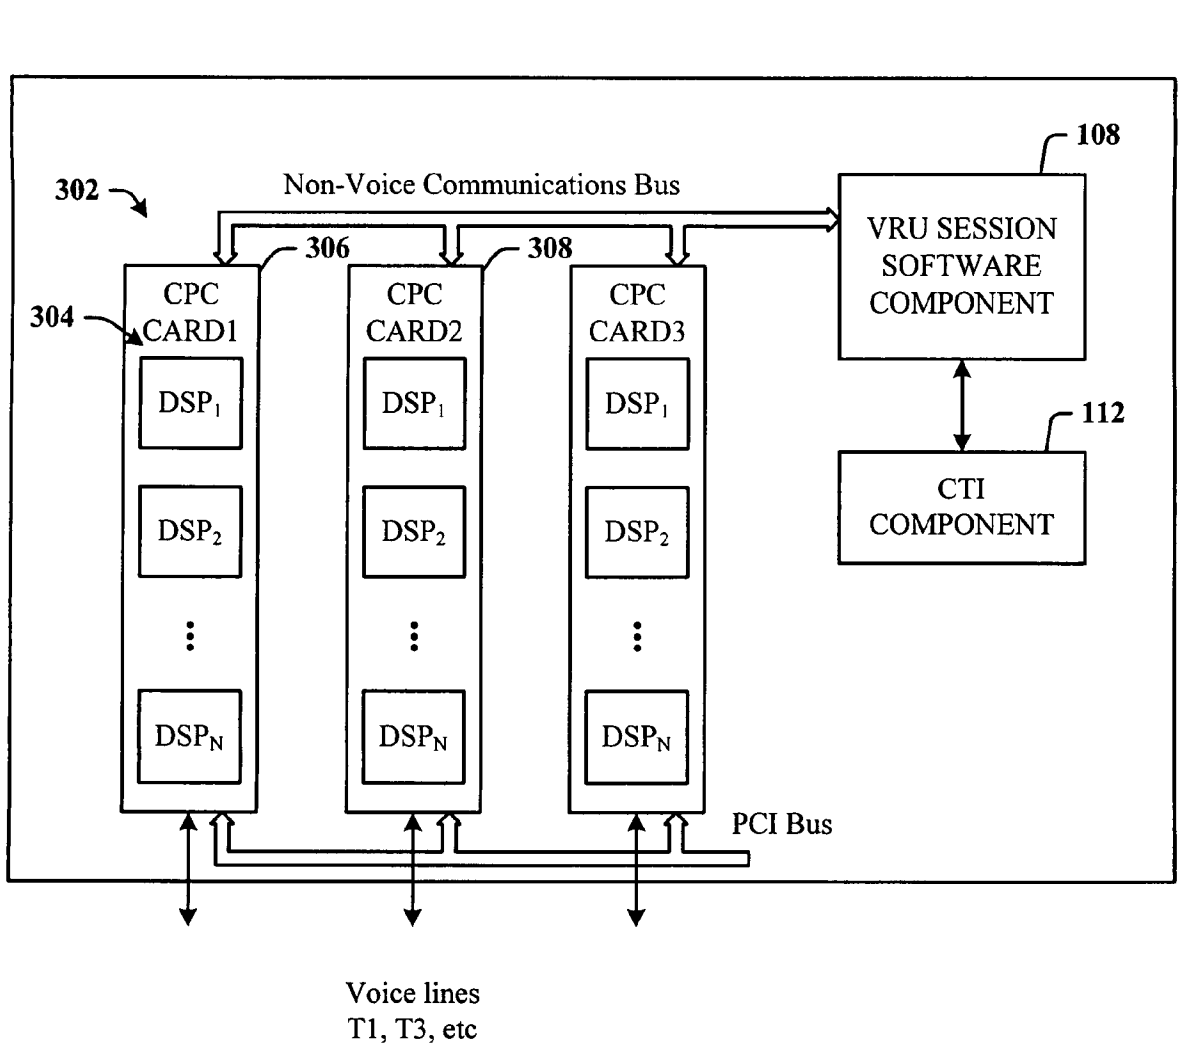


FIG. 3

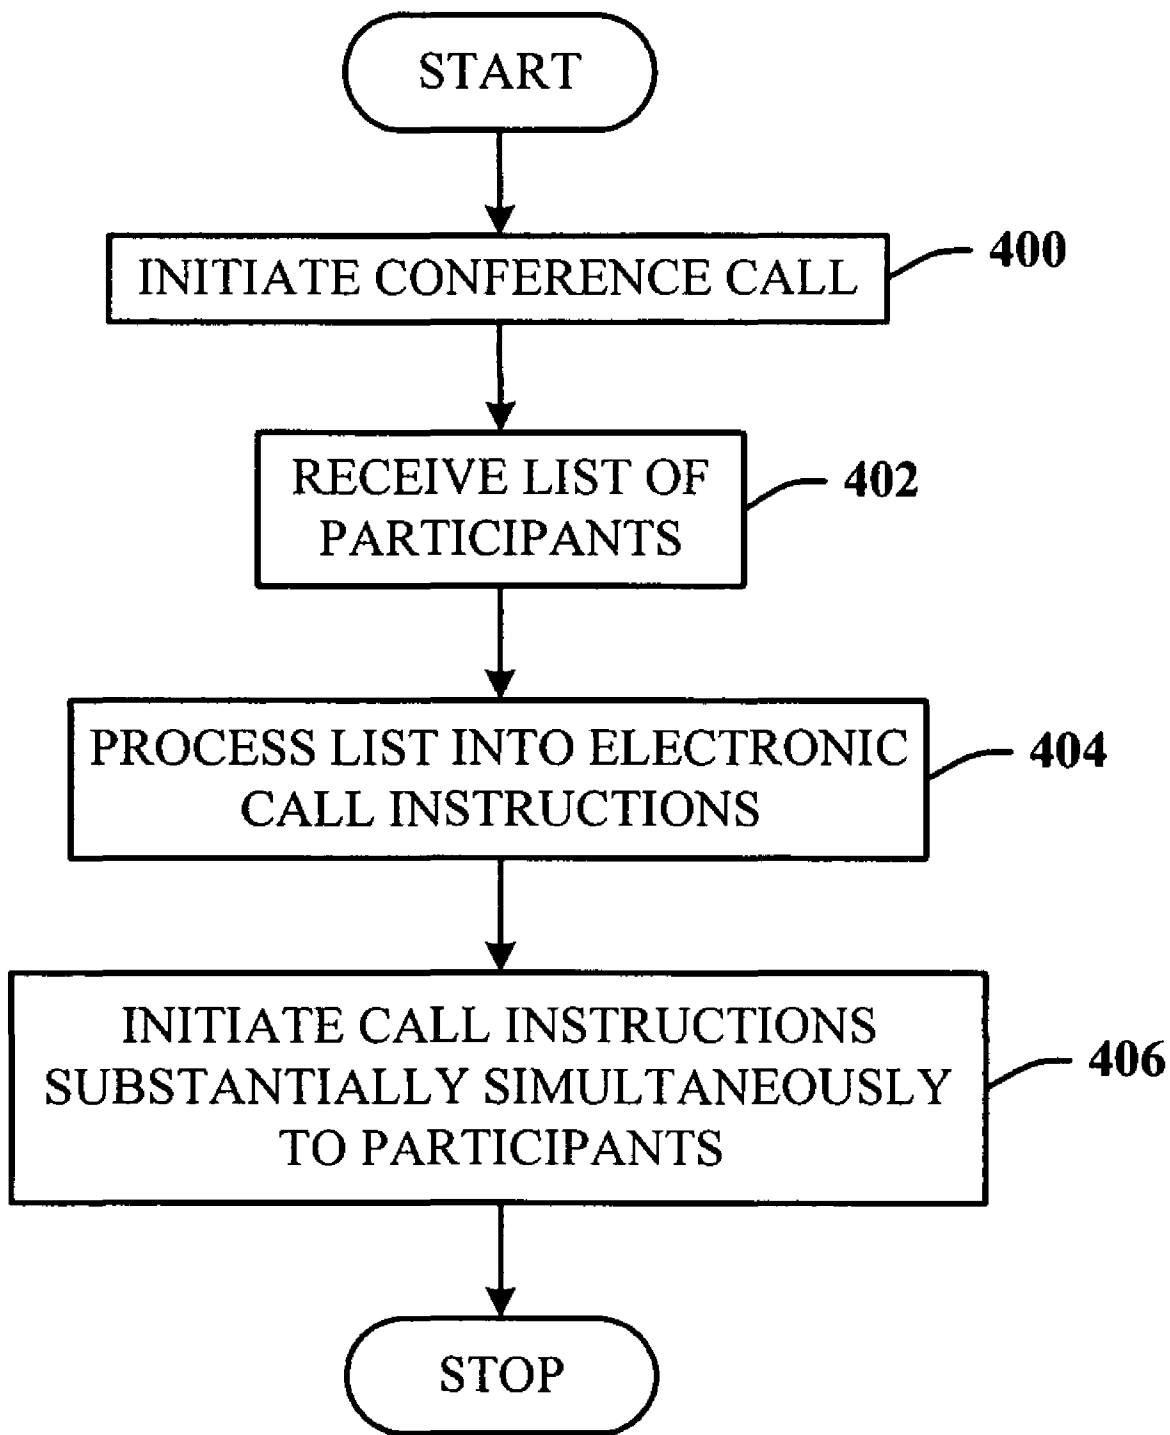


FIG. 4

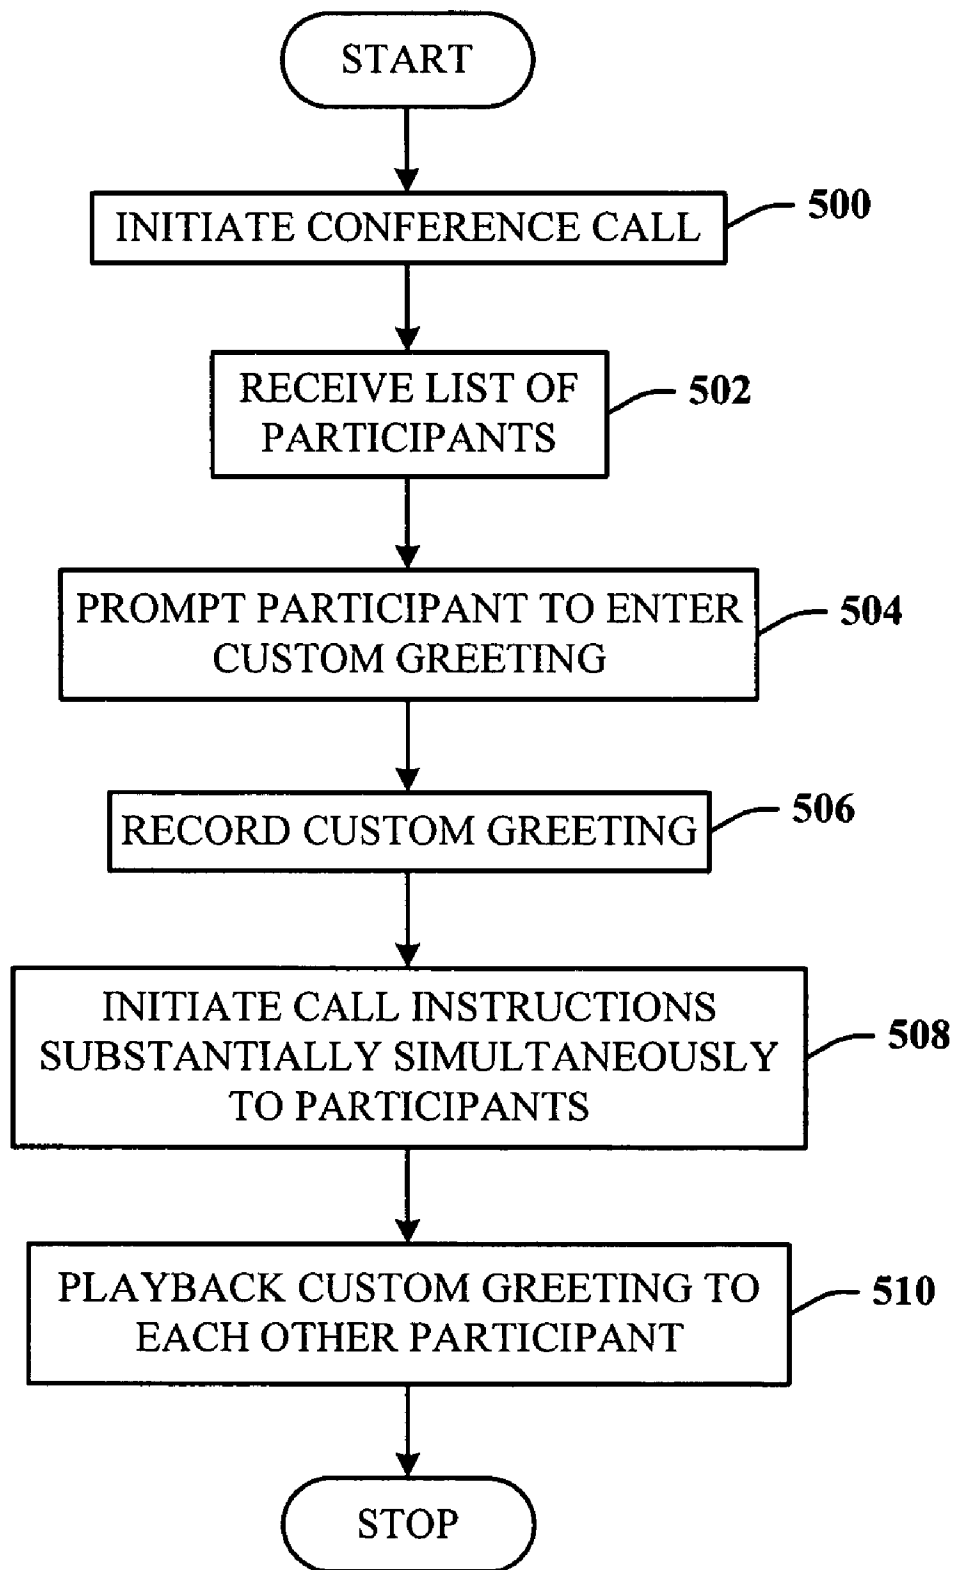


FIG. 5

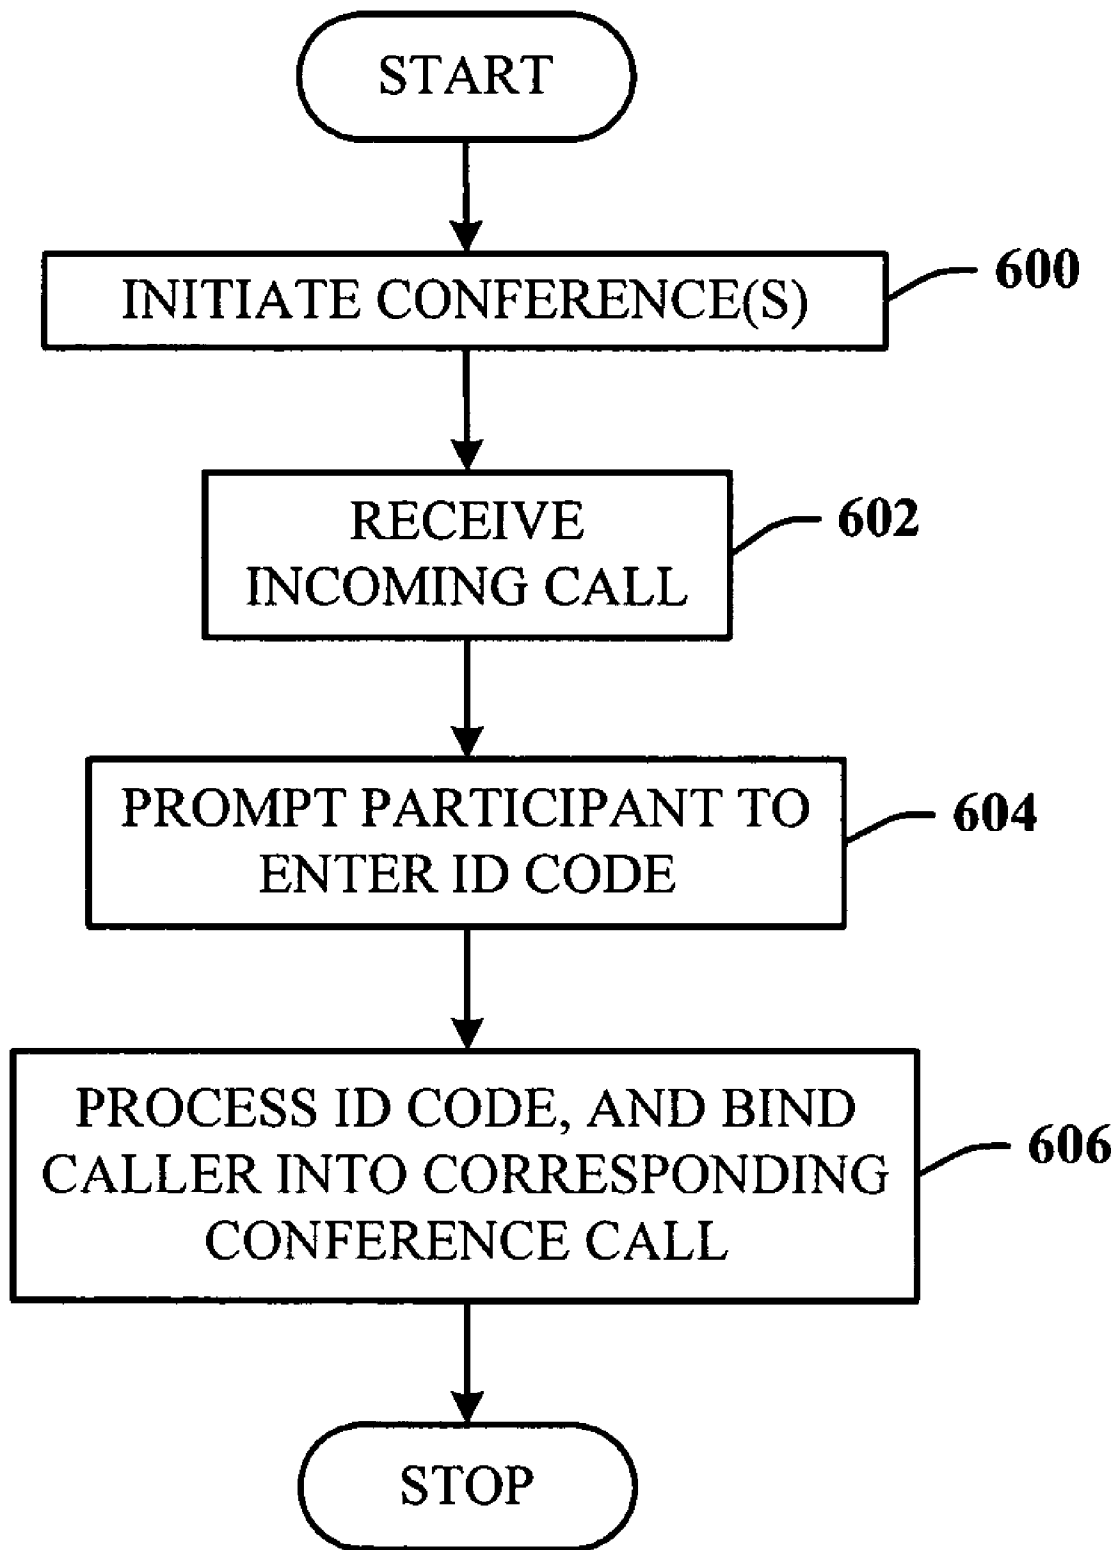


FIG. 6

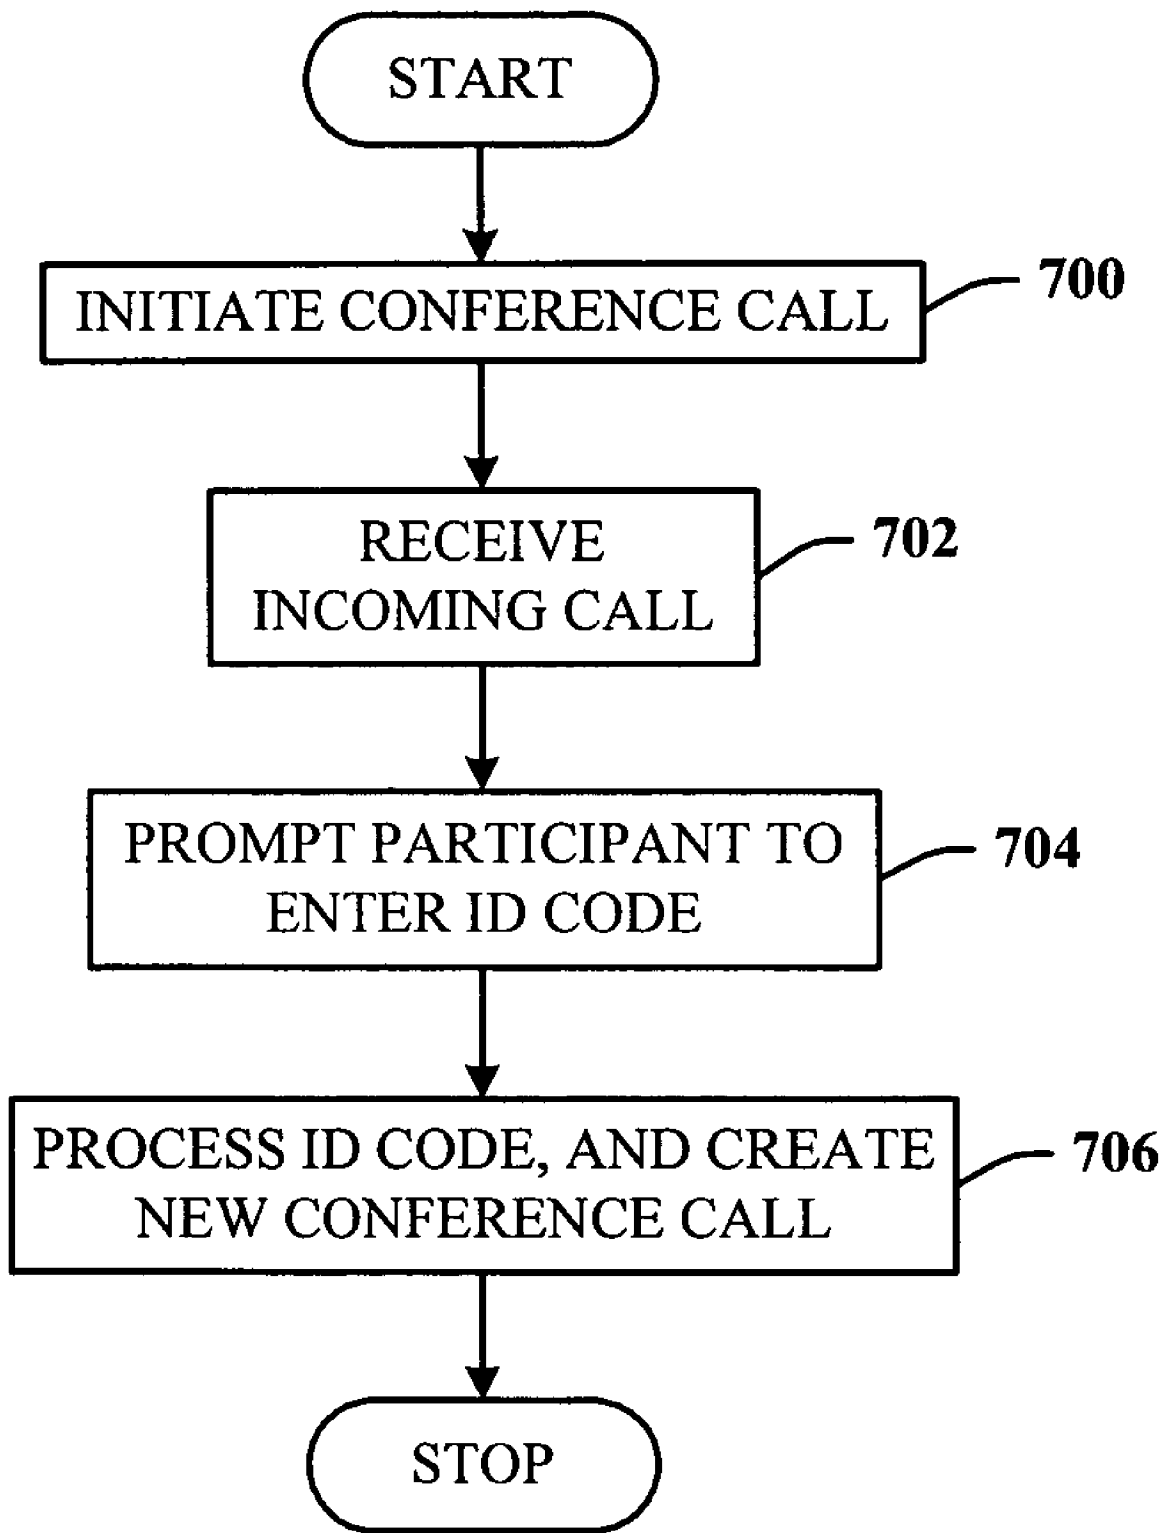


FIG. 7

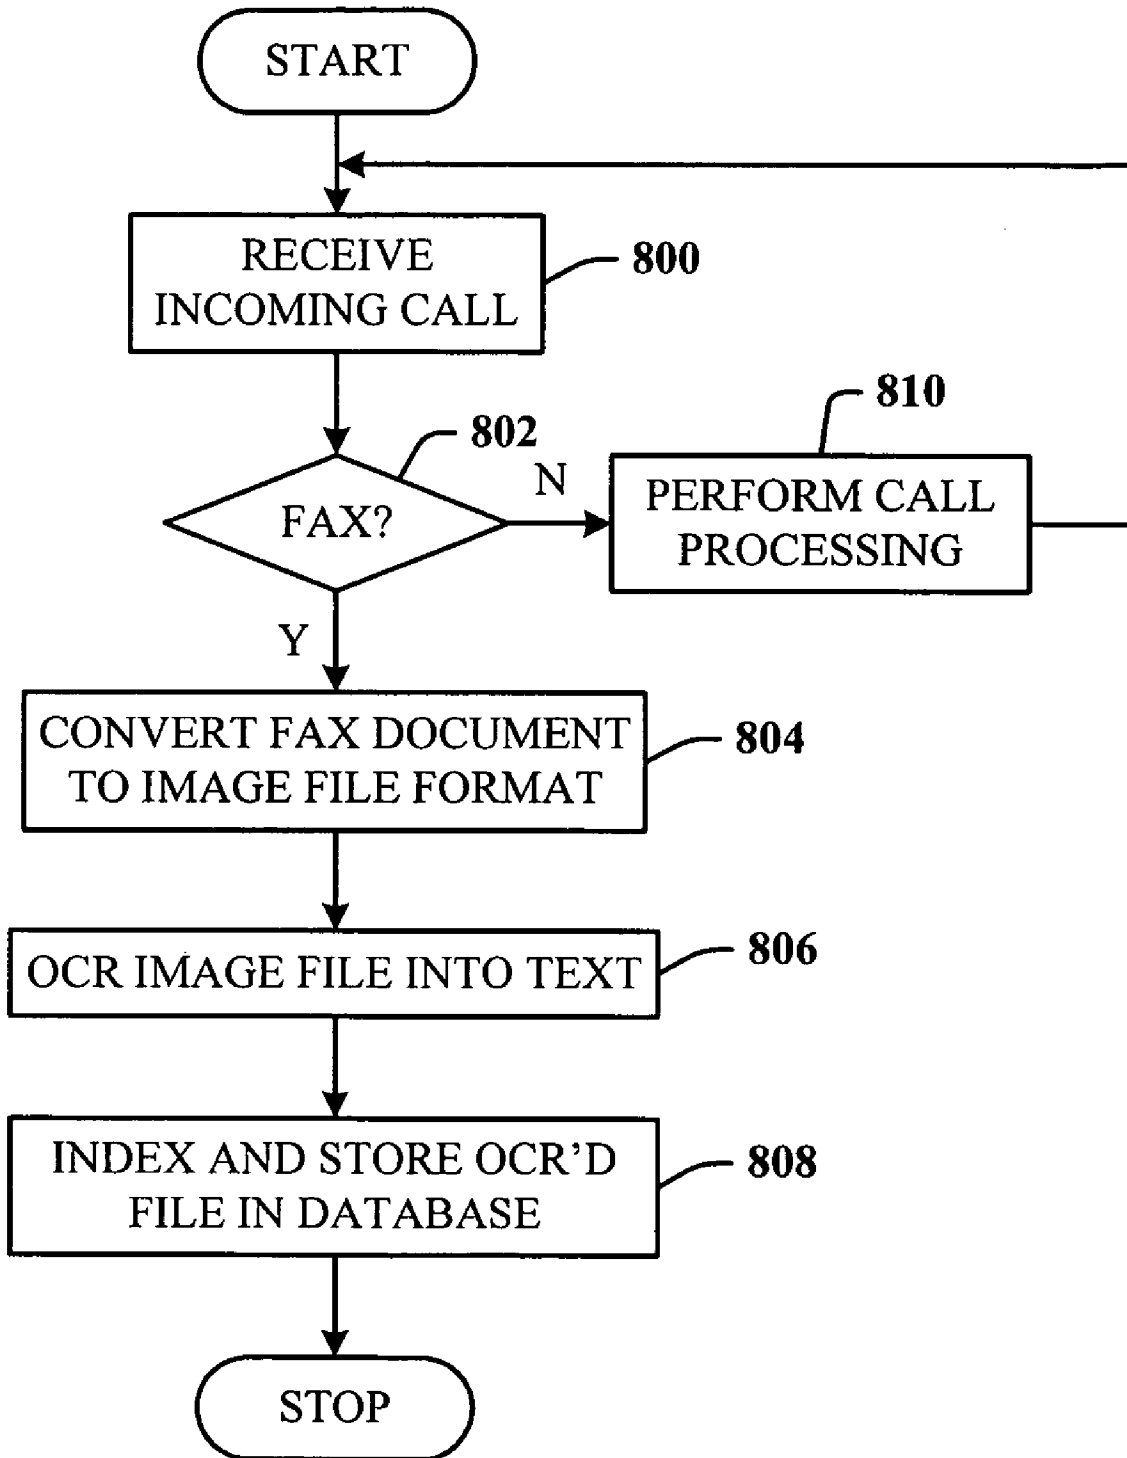


FIG. 8

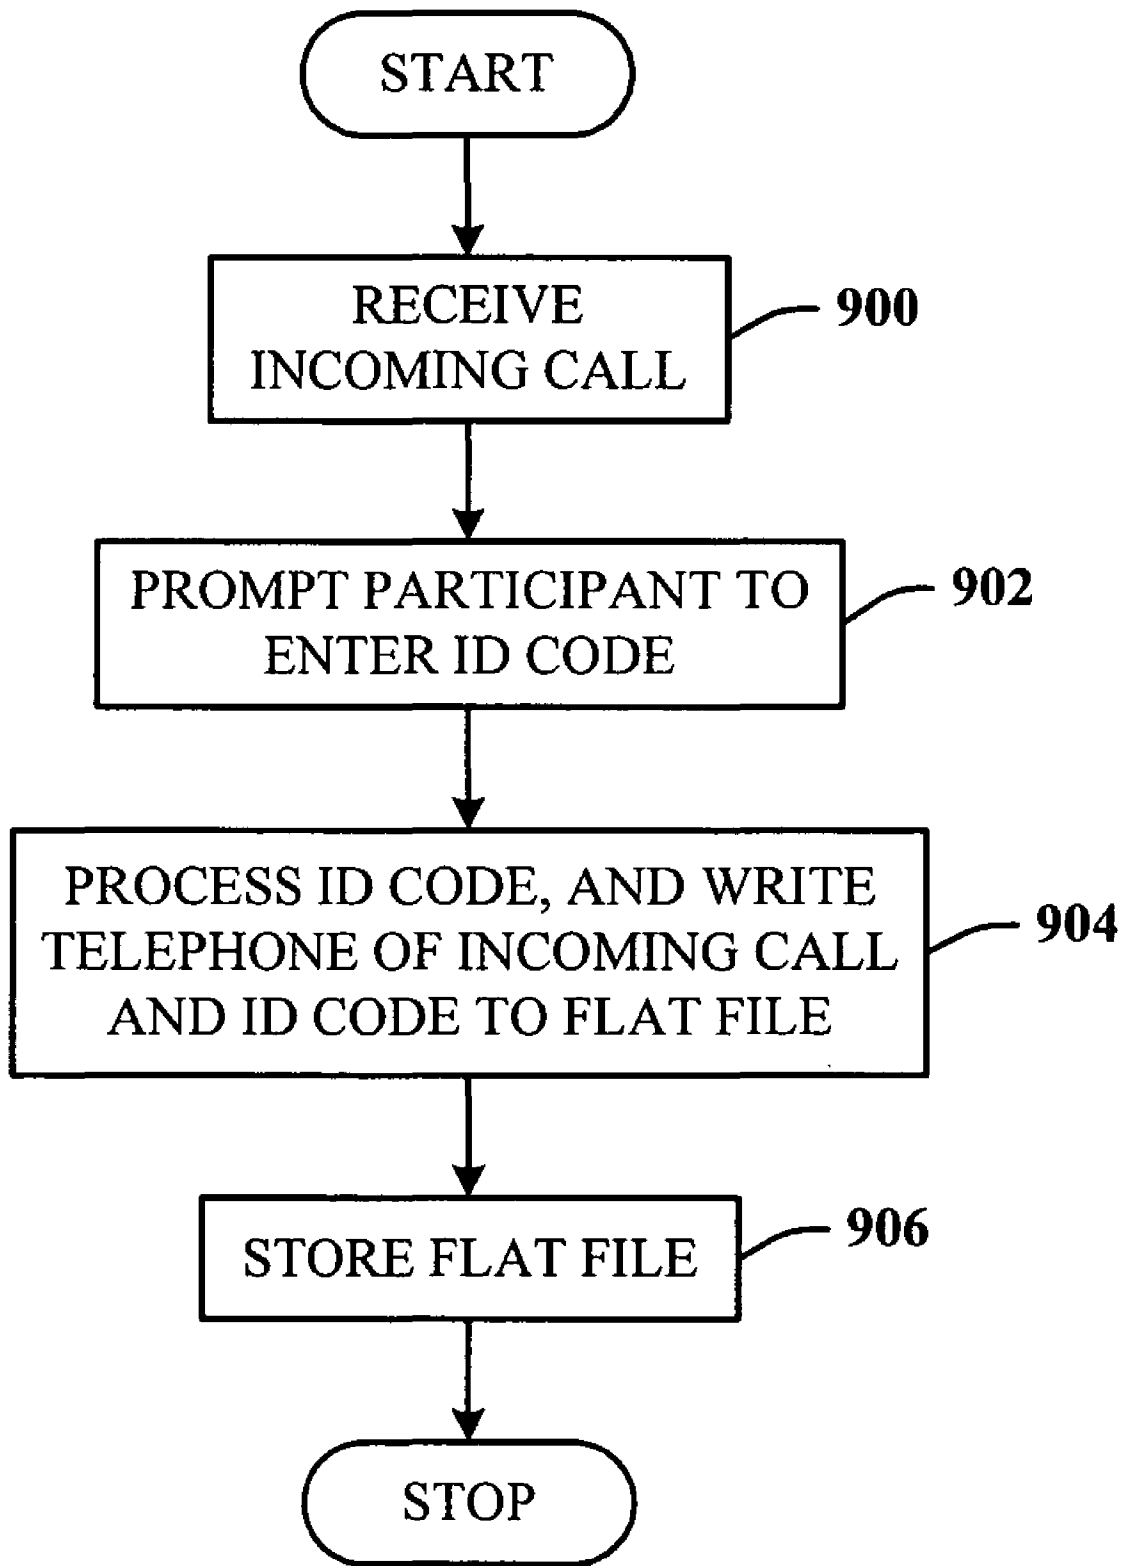


FIG. 9

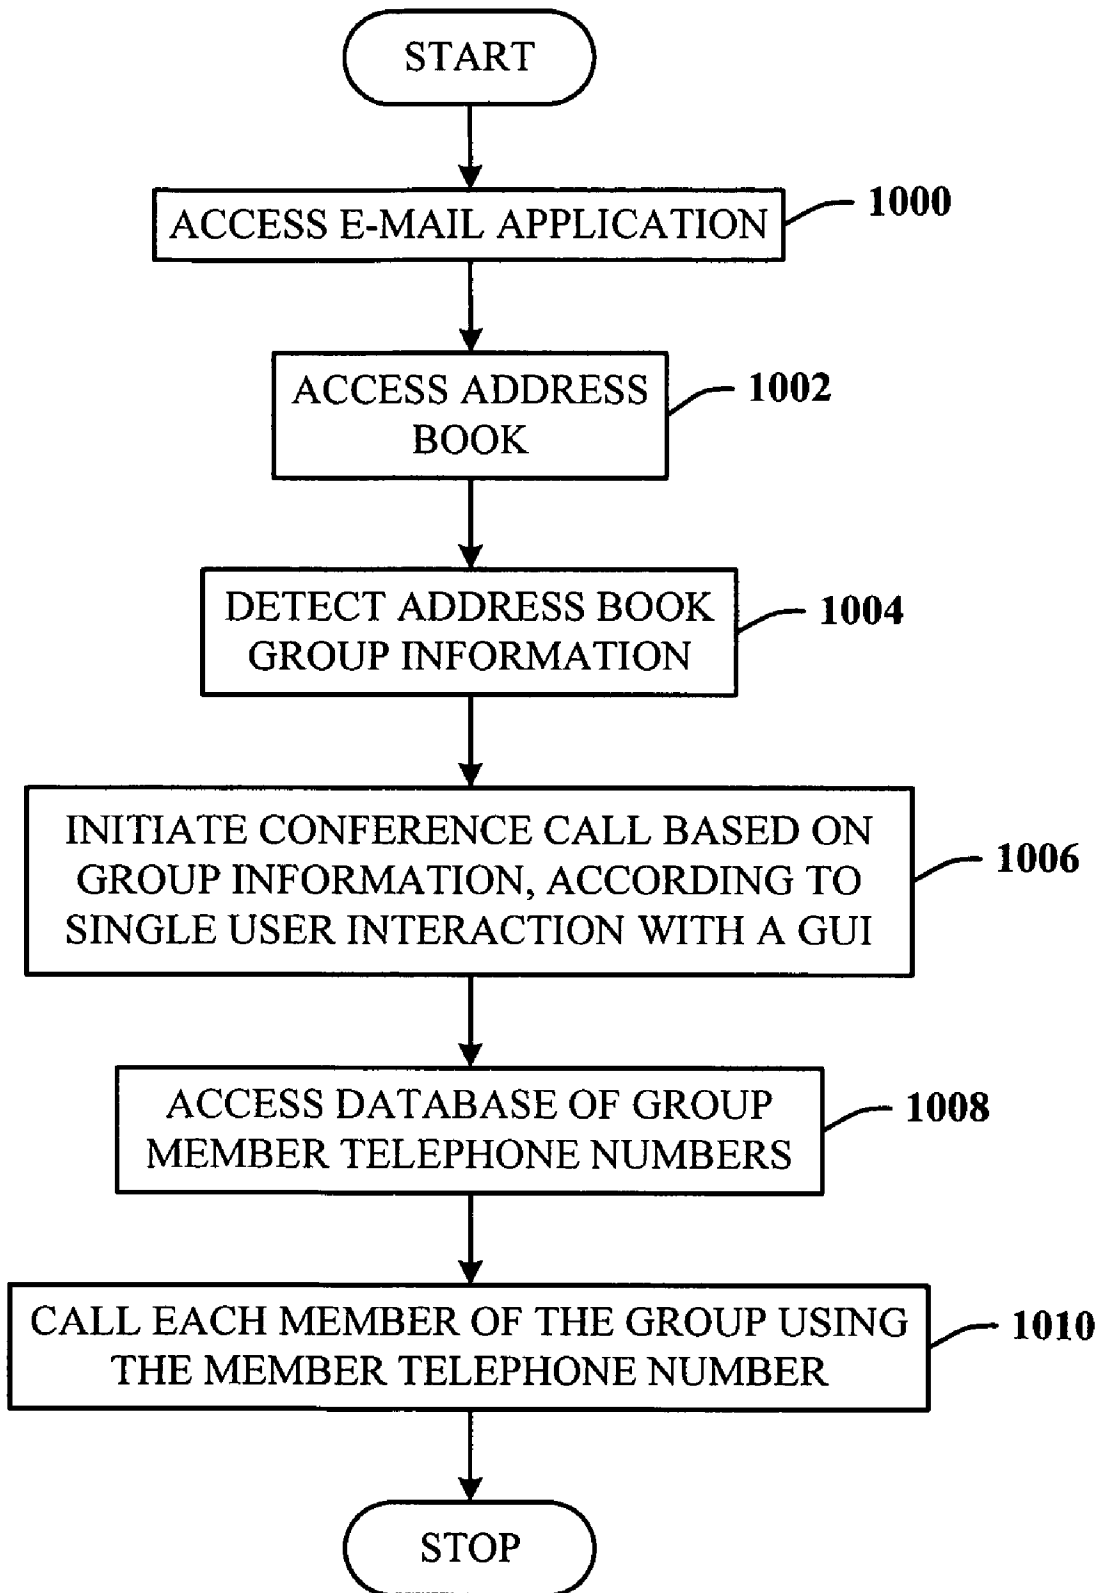


FIG. 10

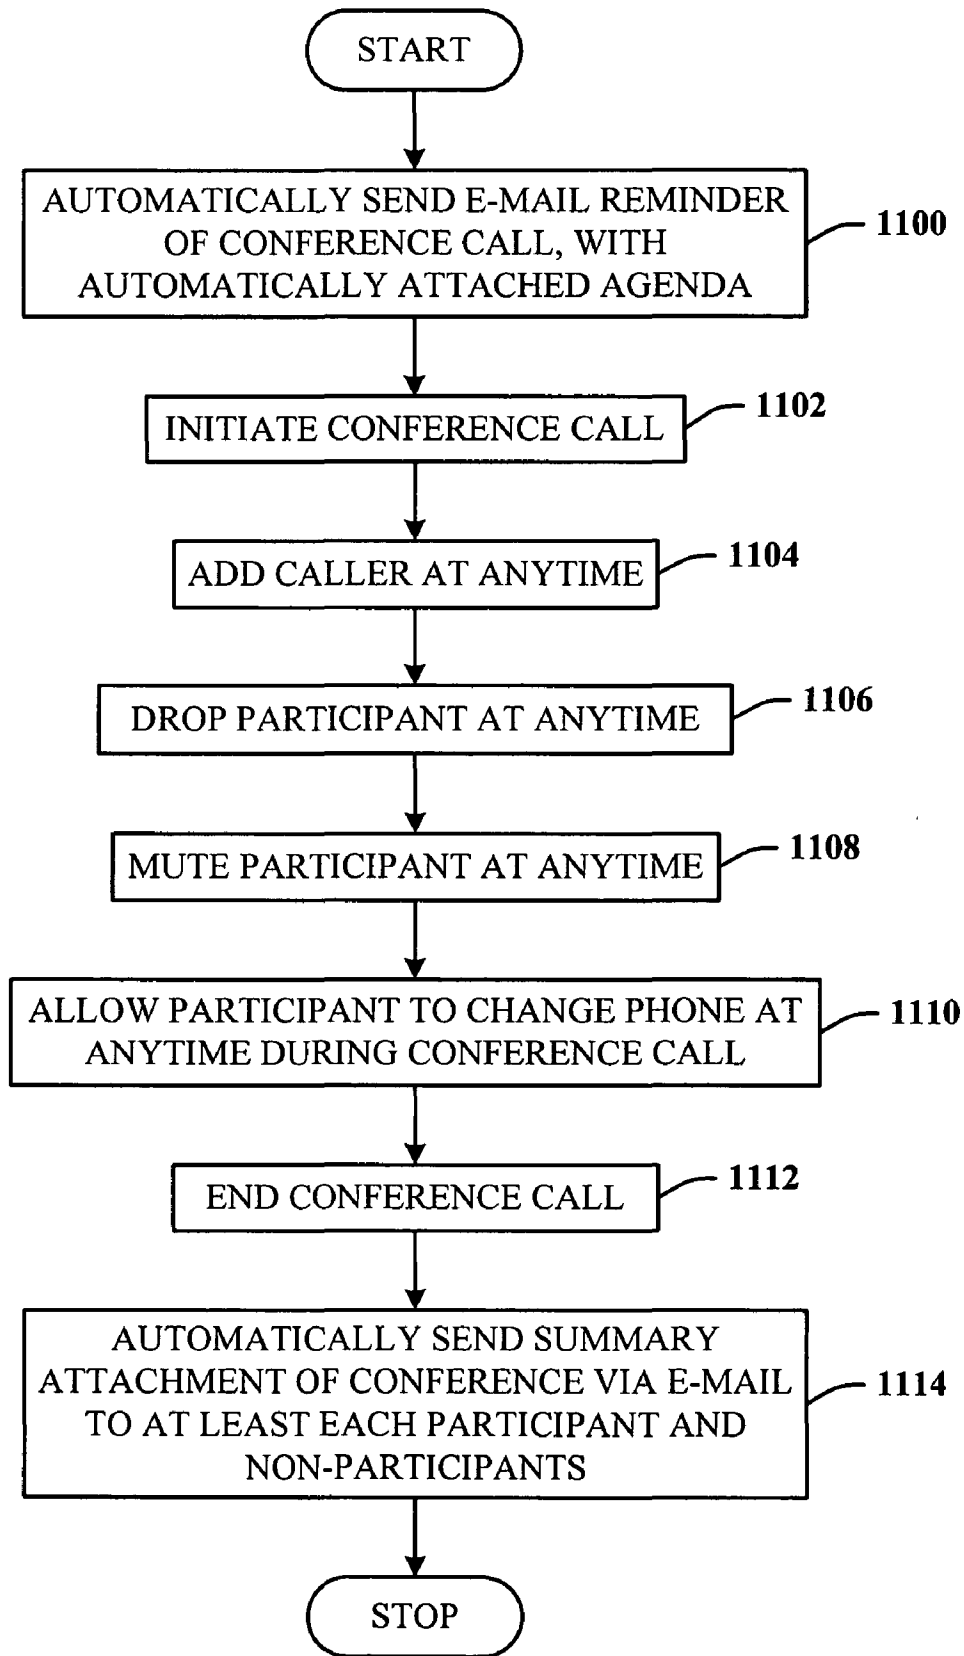


FIG. 11

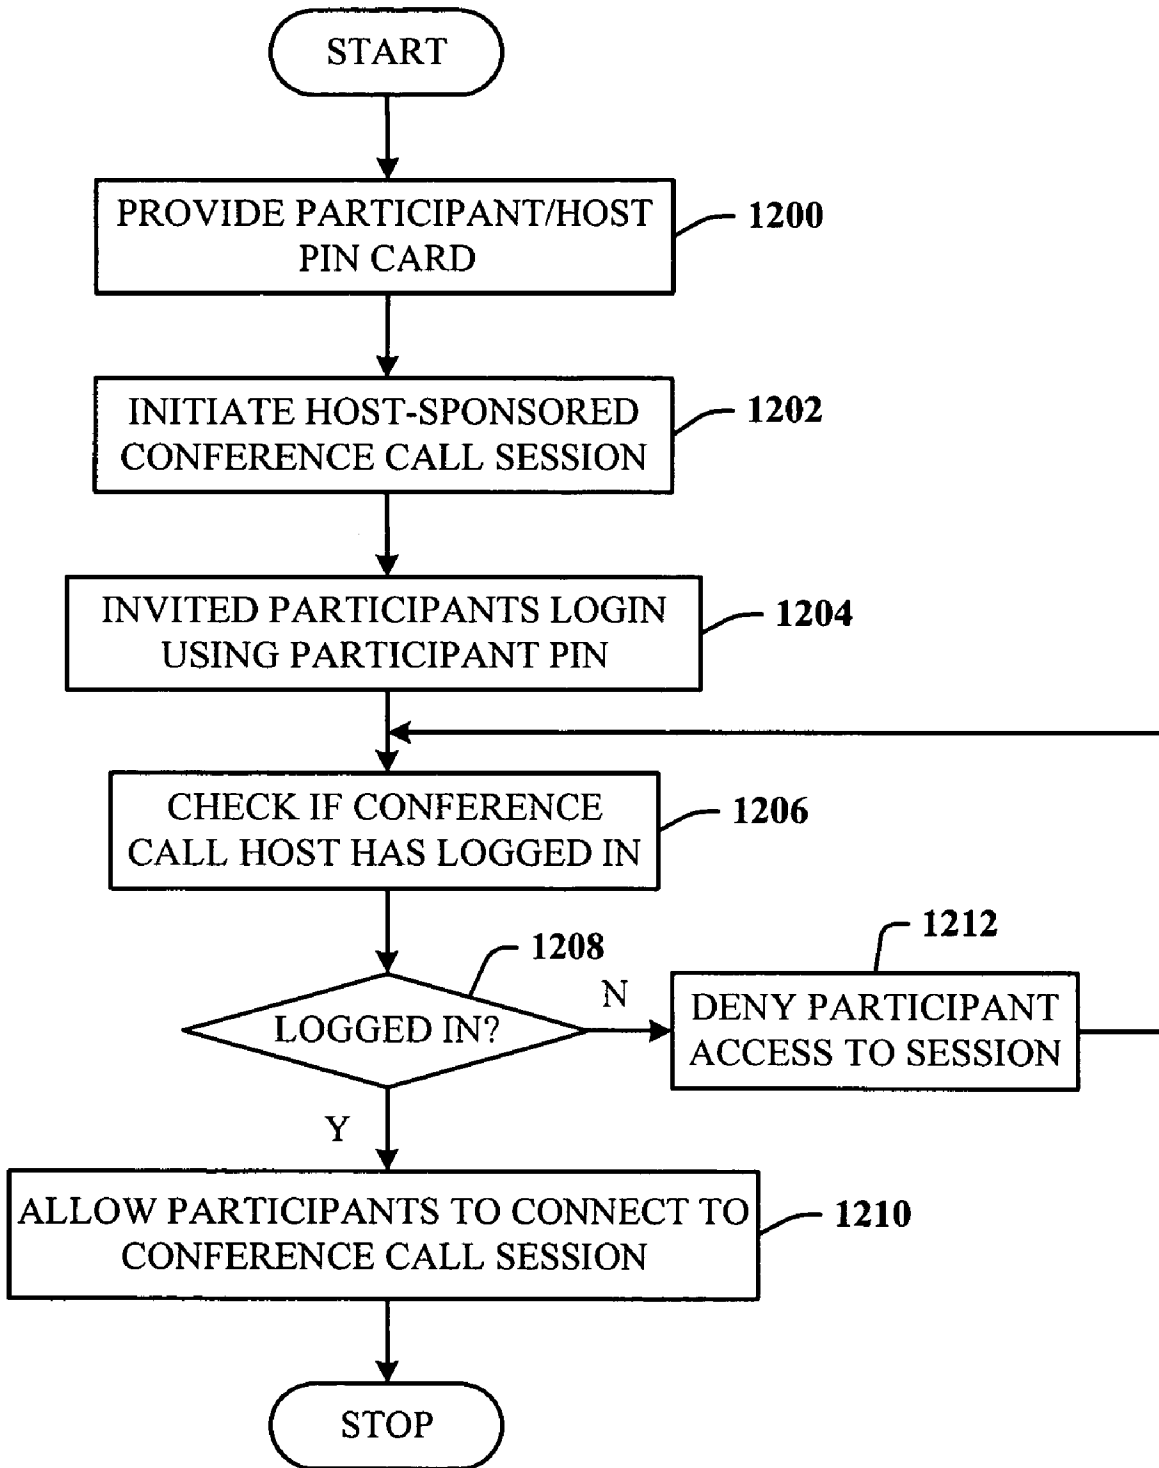


FIG. 12

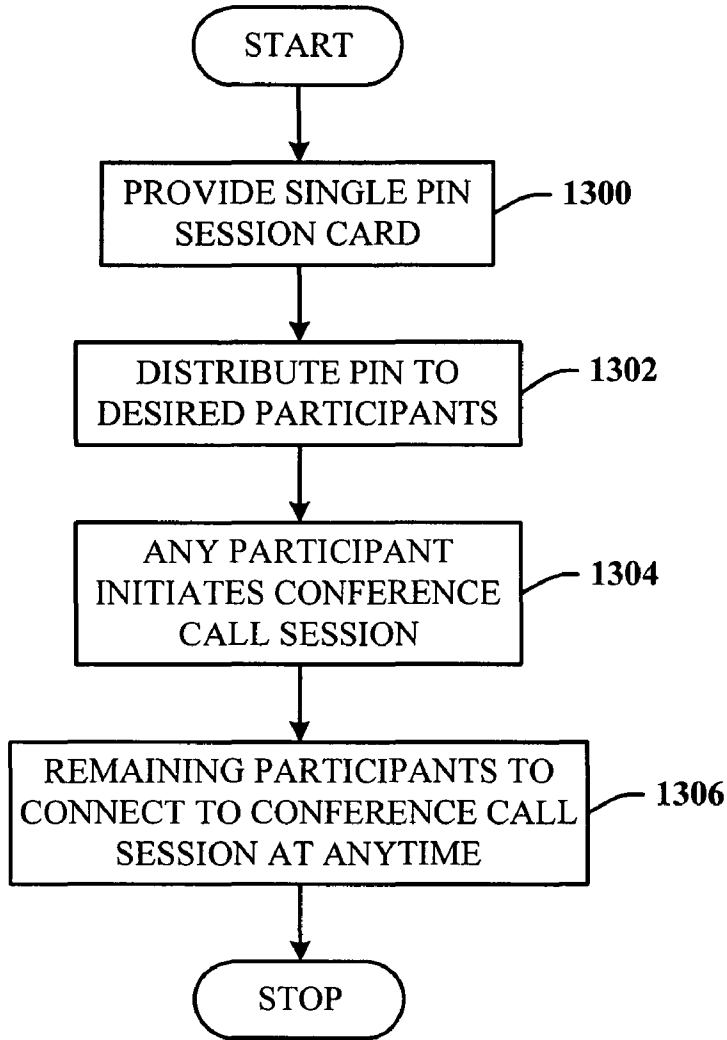


FIG. 13

1500

John Q. Public Contact: Go To www.xxx.com Press ** for a menu Dial-in Number (877) 2787-1234 Host PIN: 123456 Participant PIN: 654321
Instructions: *0 = Get Operator; *1=to Add Participant; *2=Drop Last Participant; *3=Mute Yourself; *9=Request Host Attention...

FIG. 15

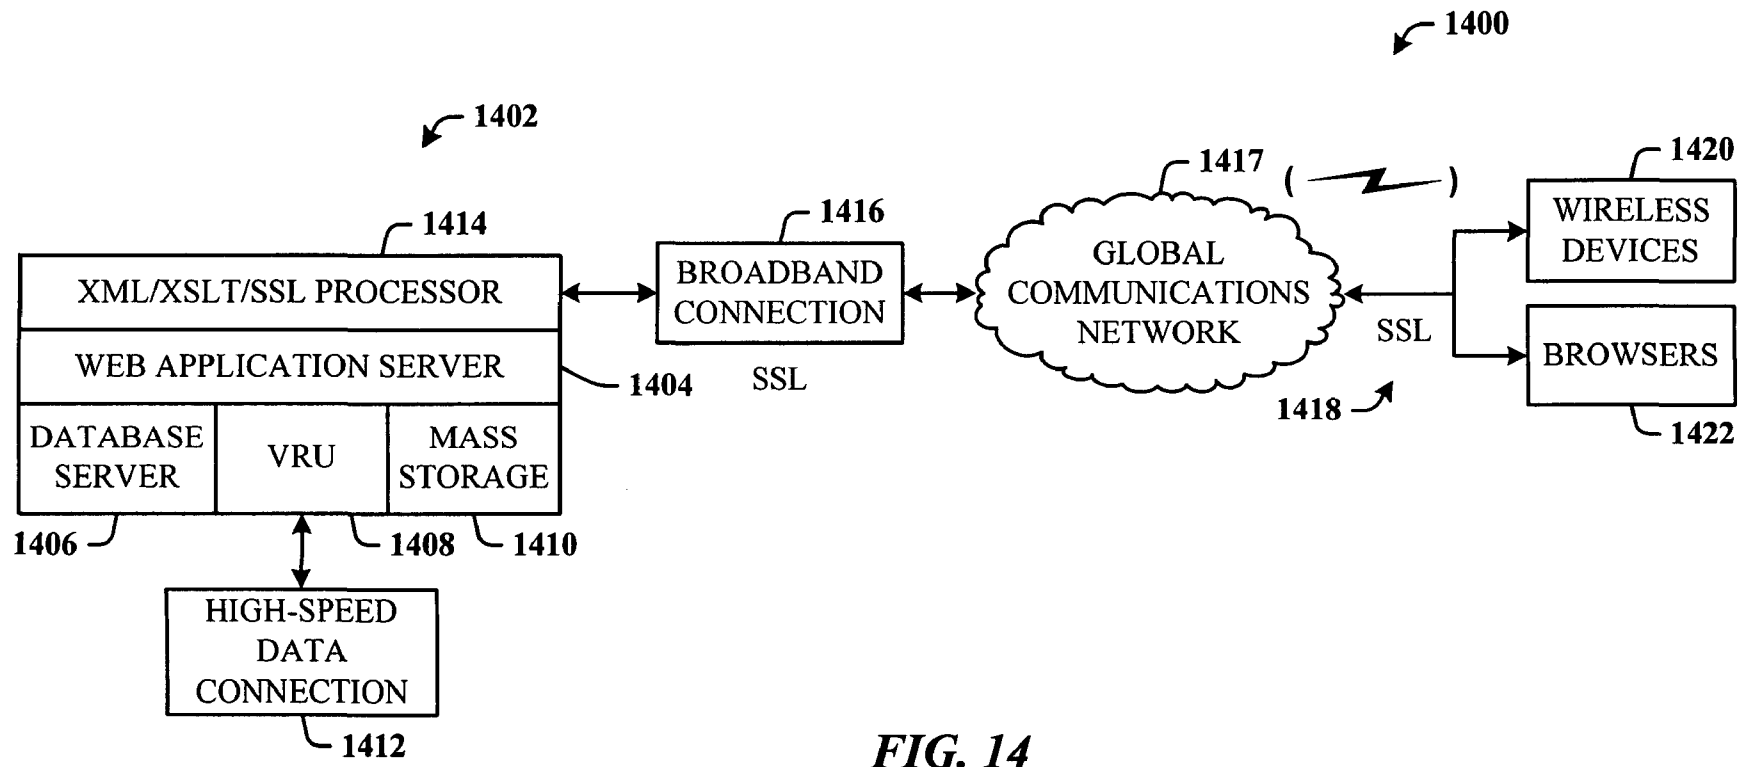


FIG. 14

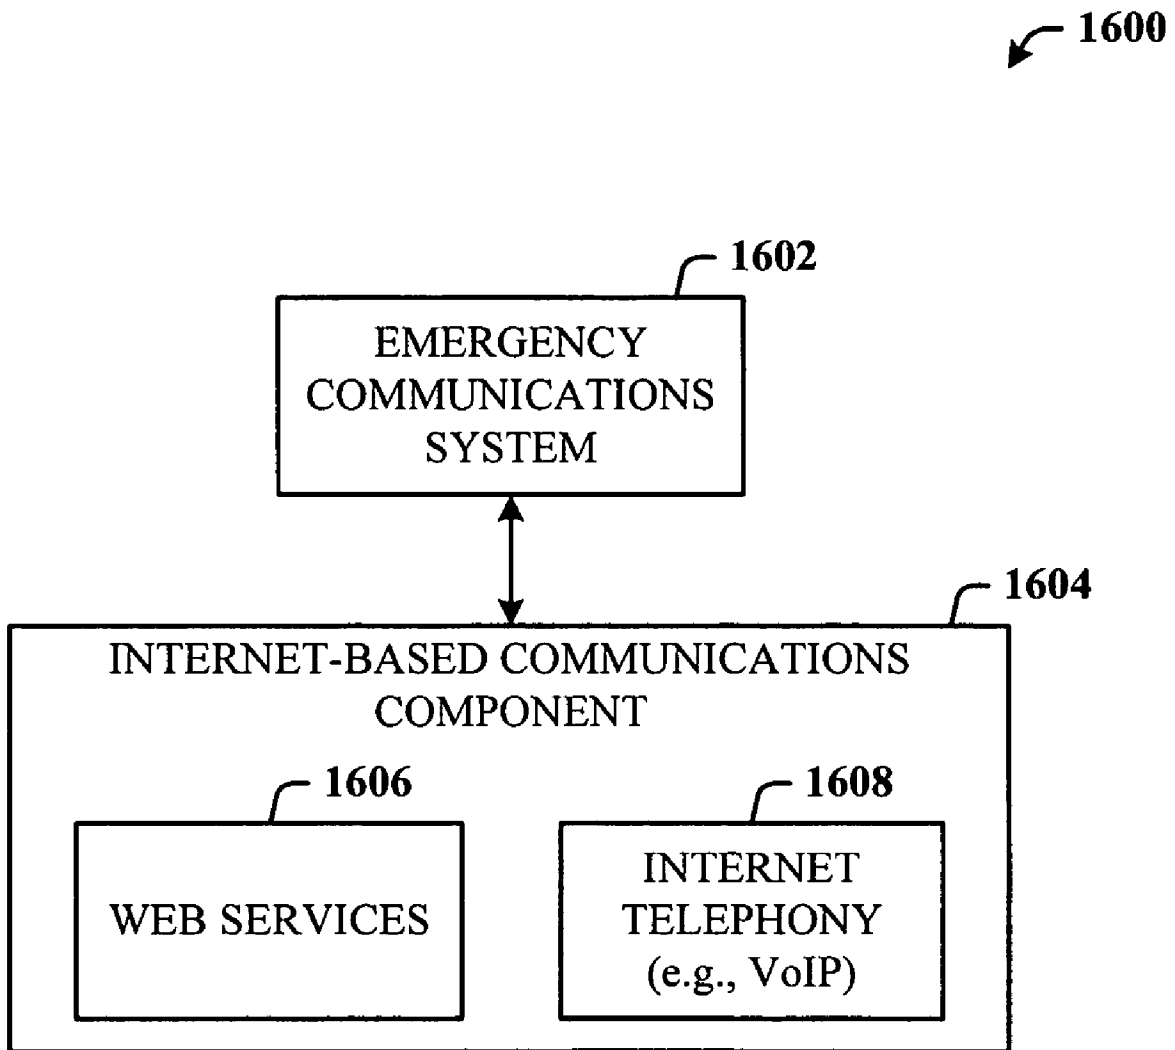


FIG. 16

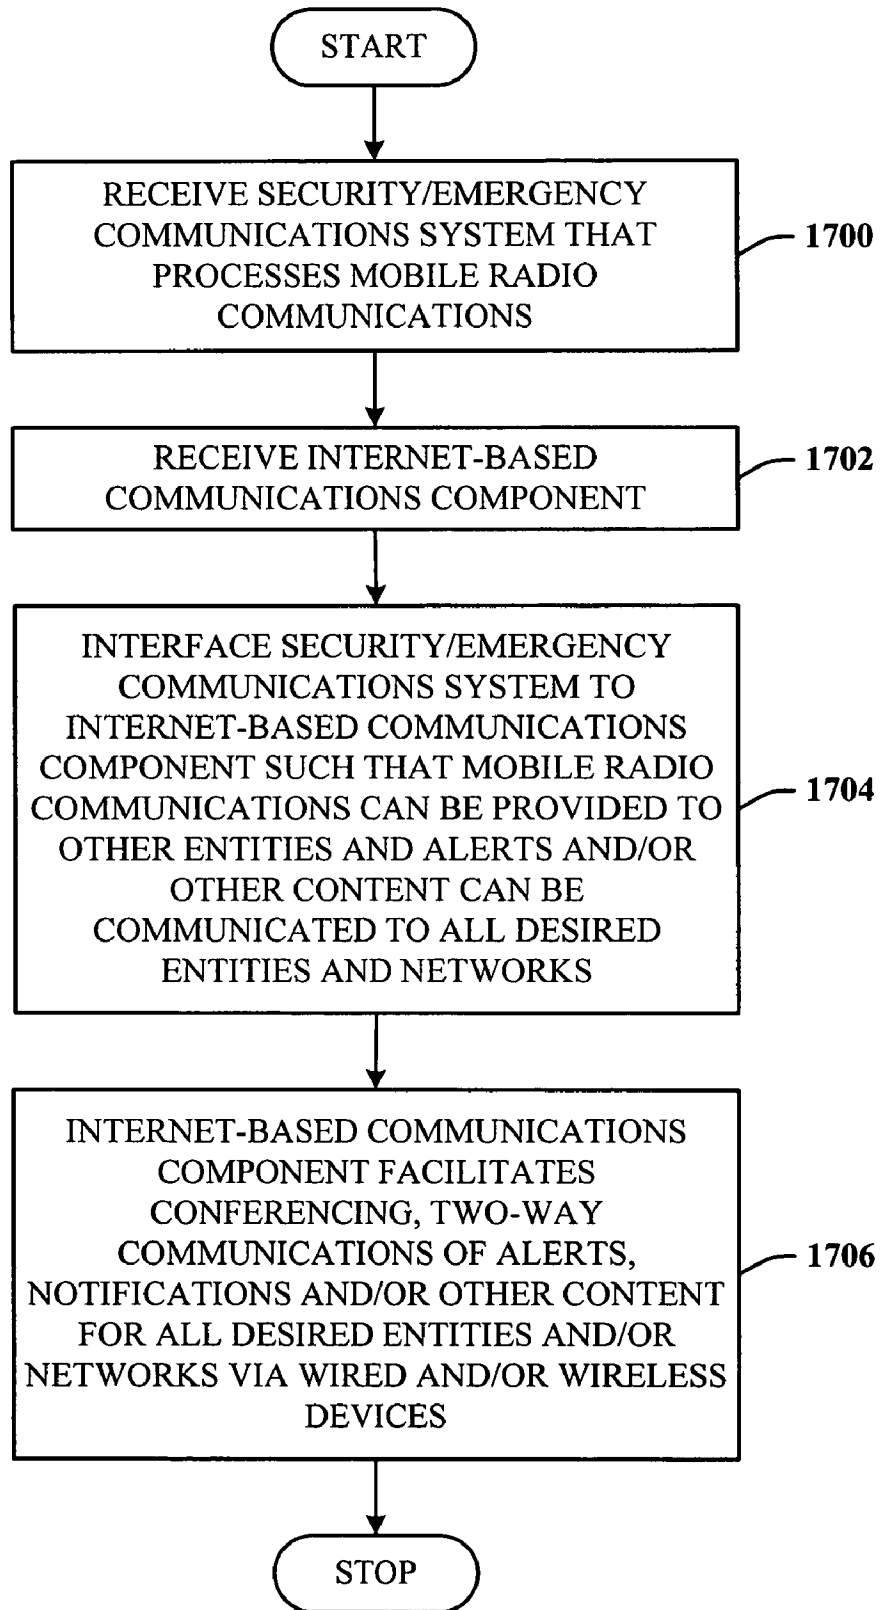


FIG. 17

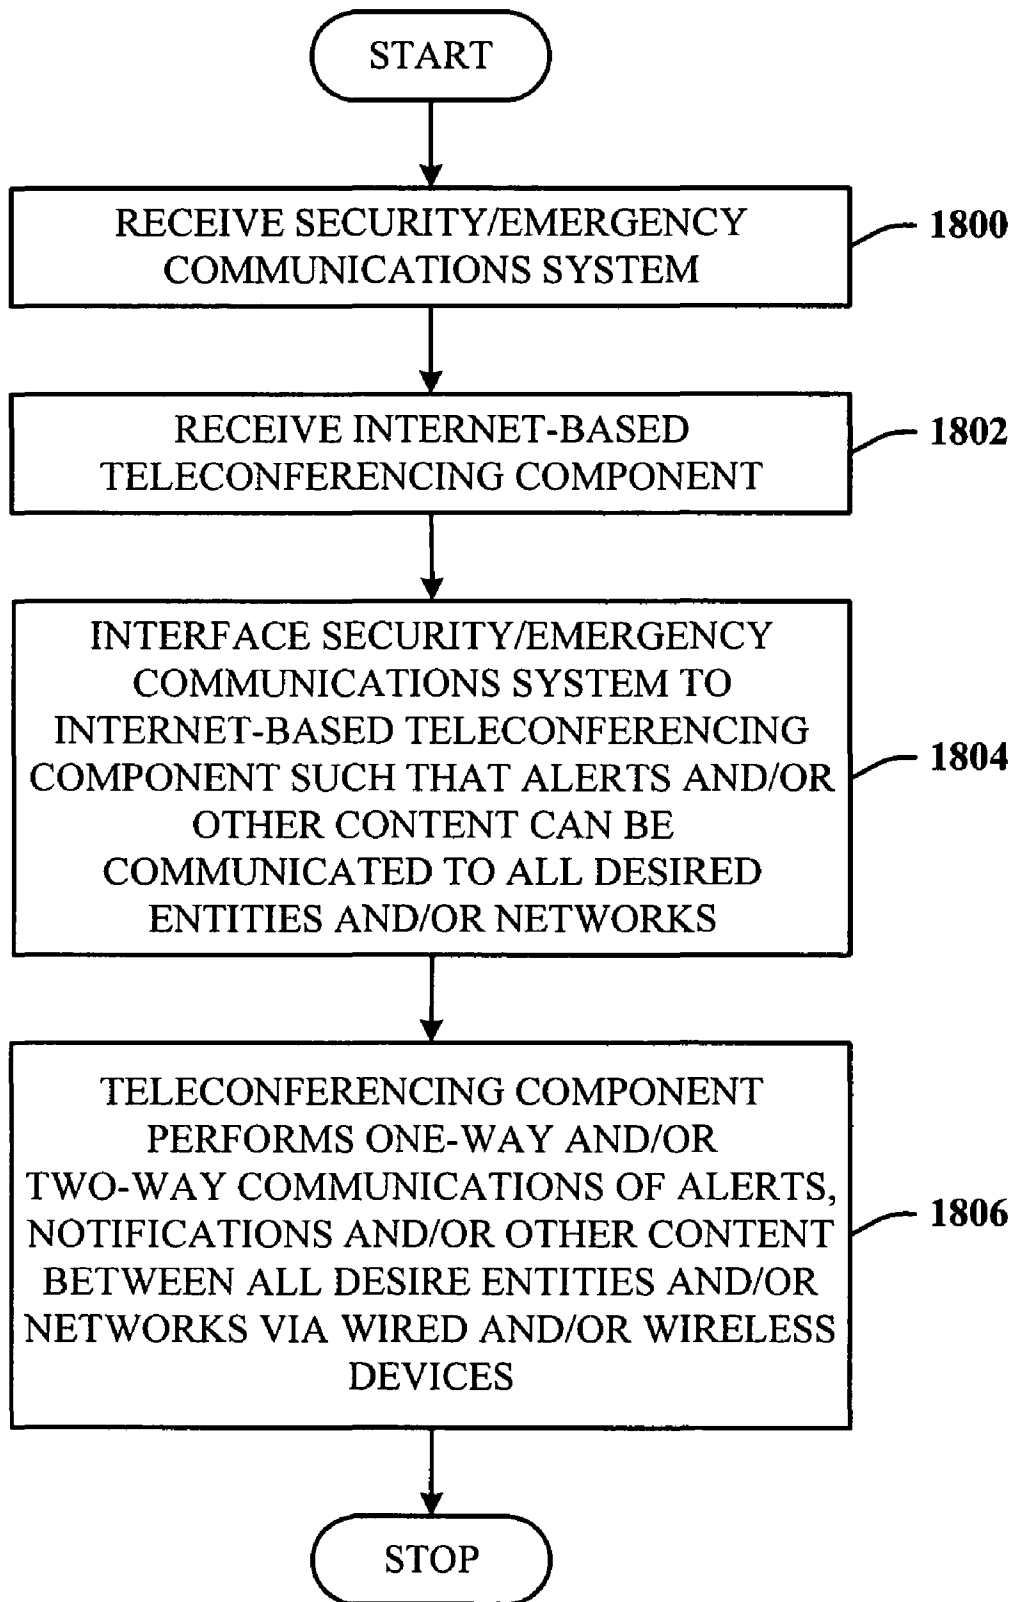


FIG. 18

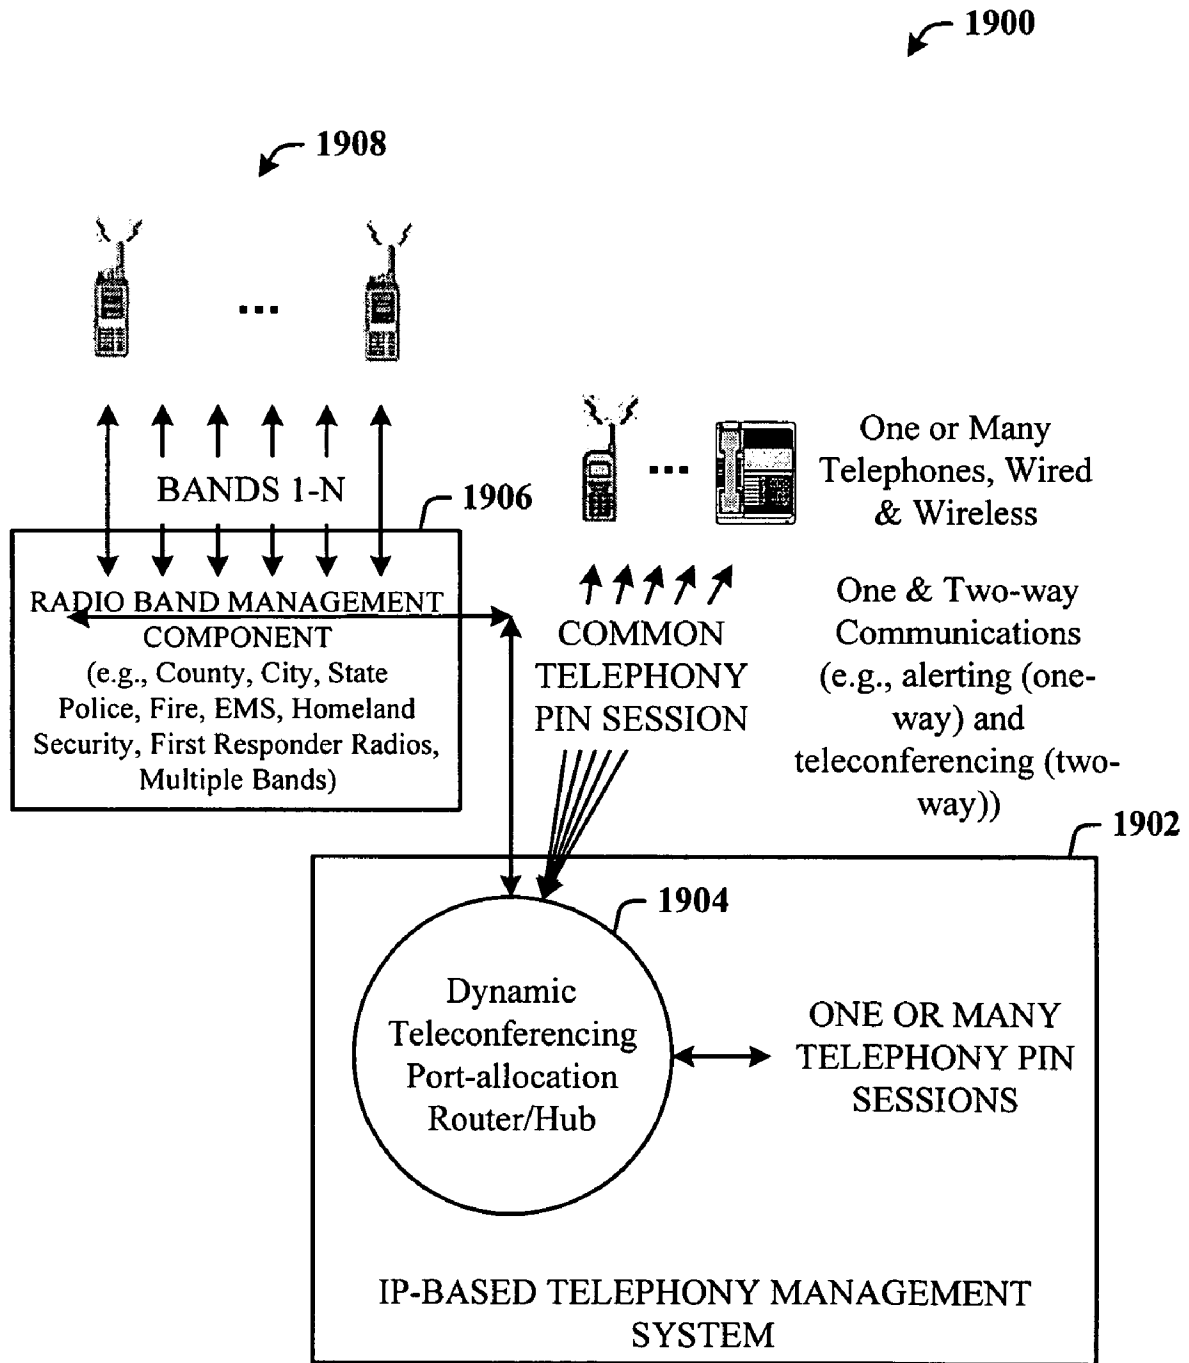


FIG. 19

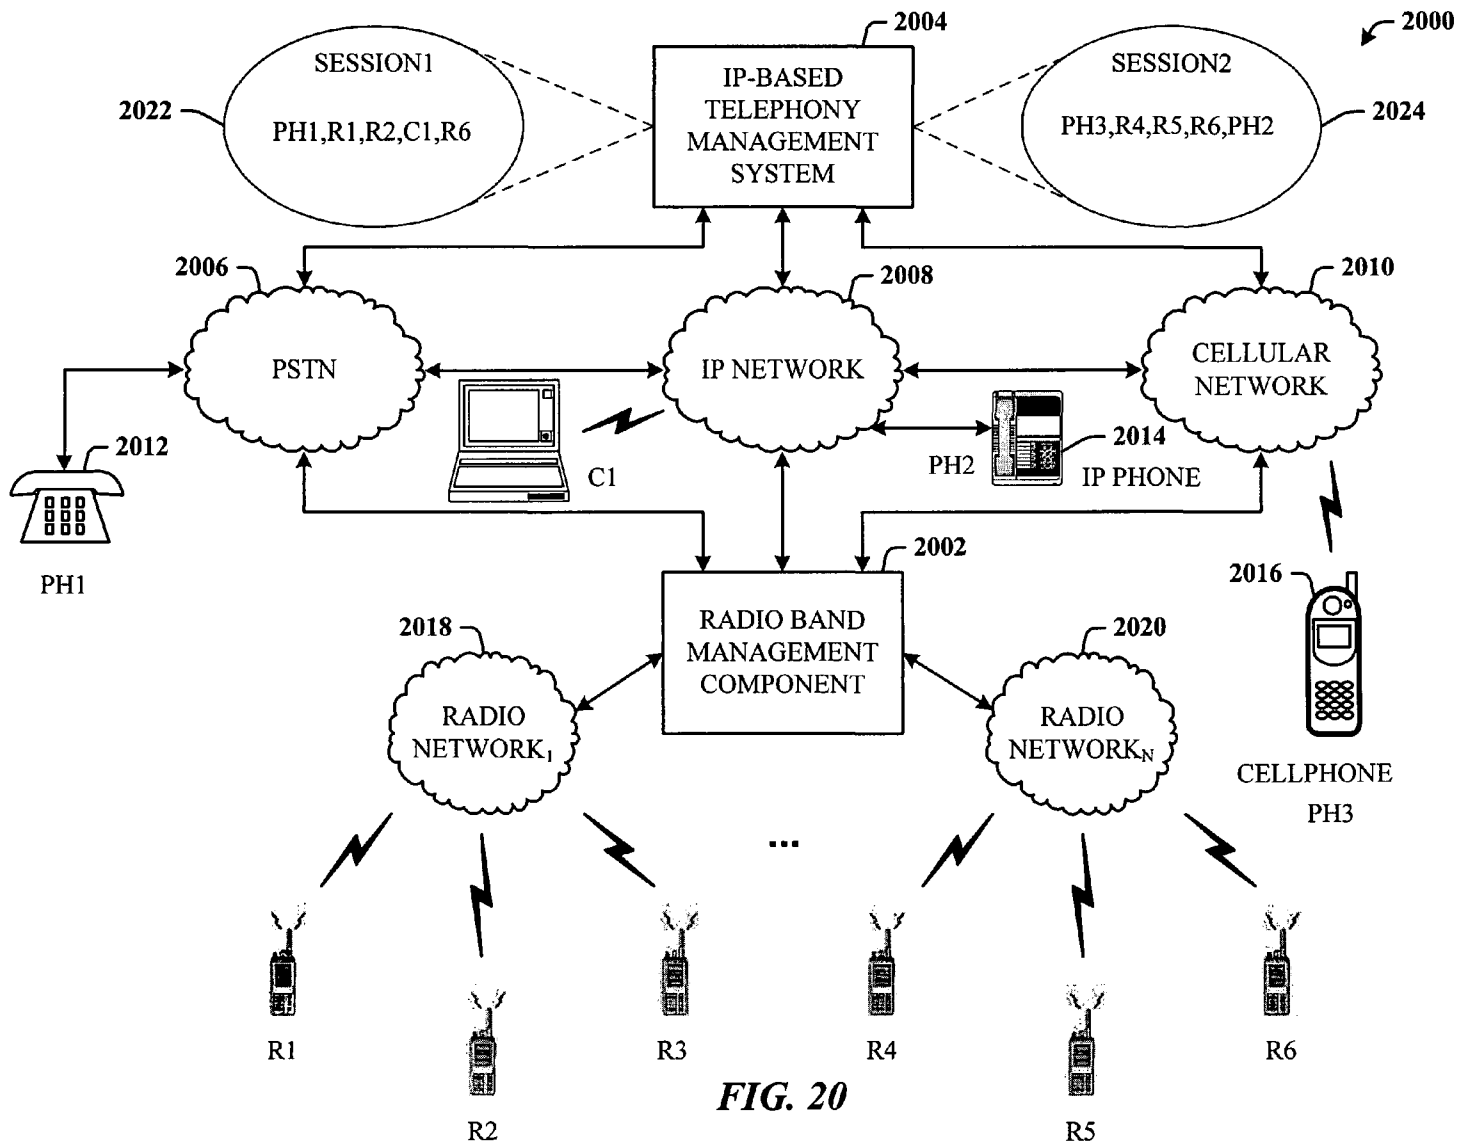


FIG. 20

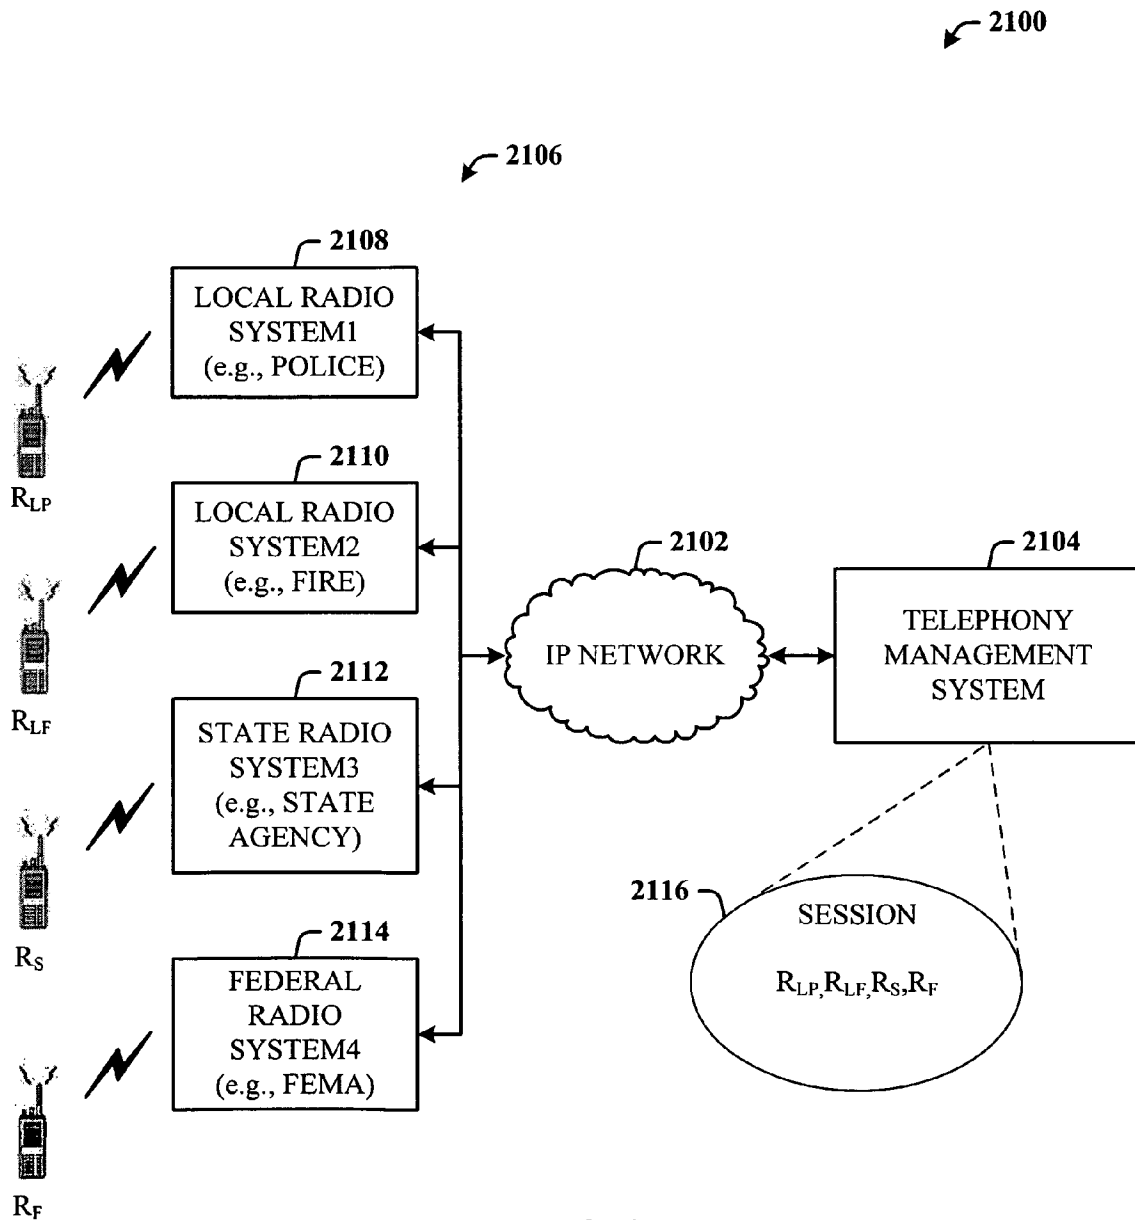


FIG. 21

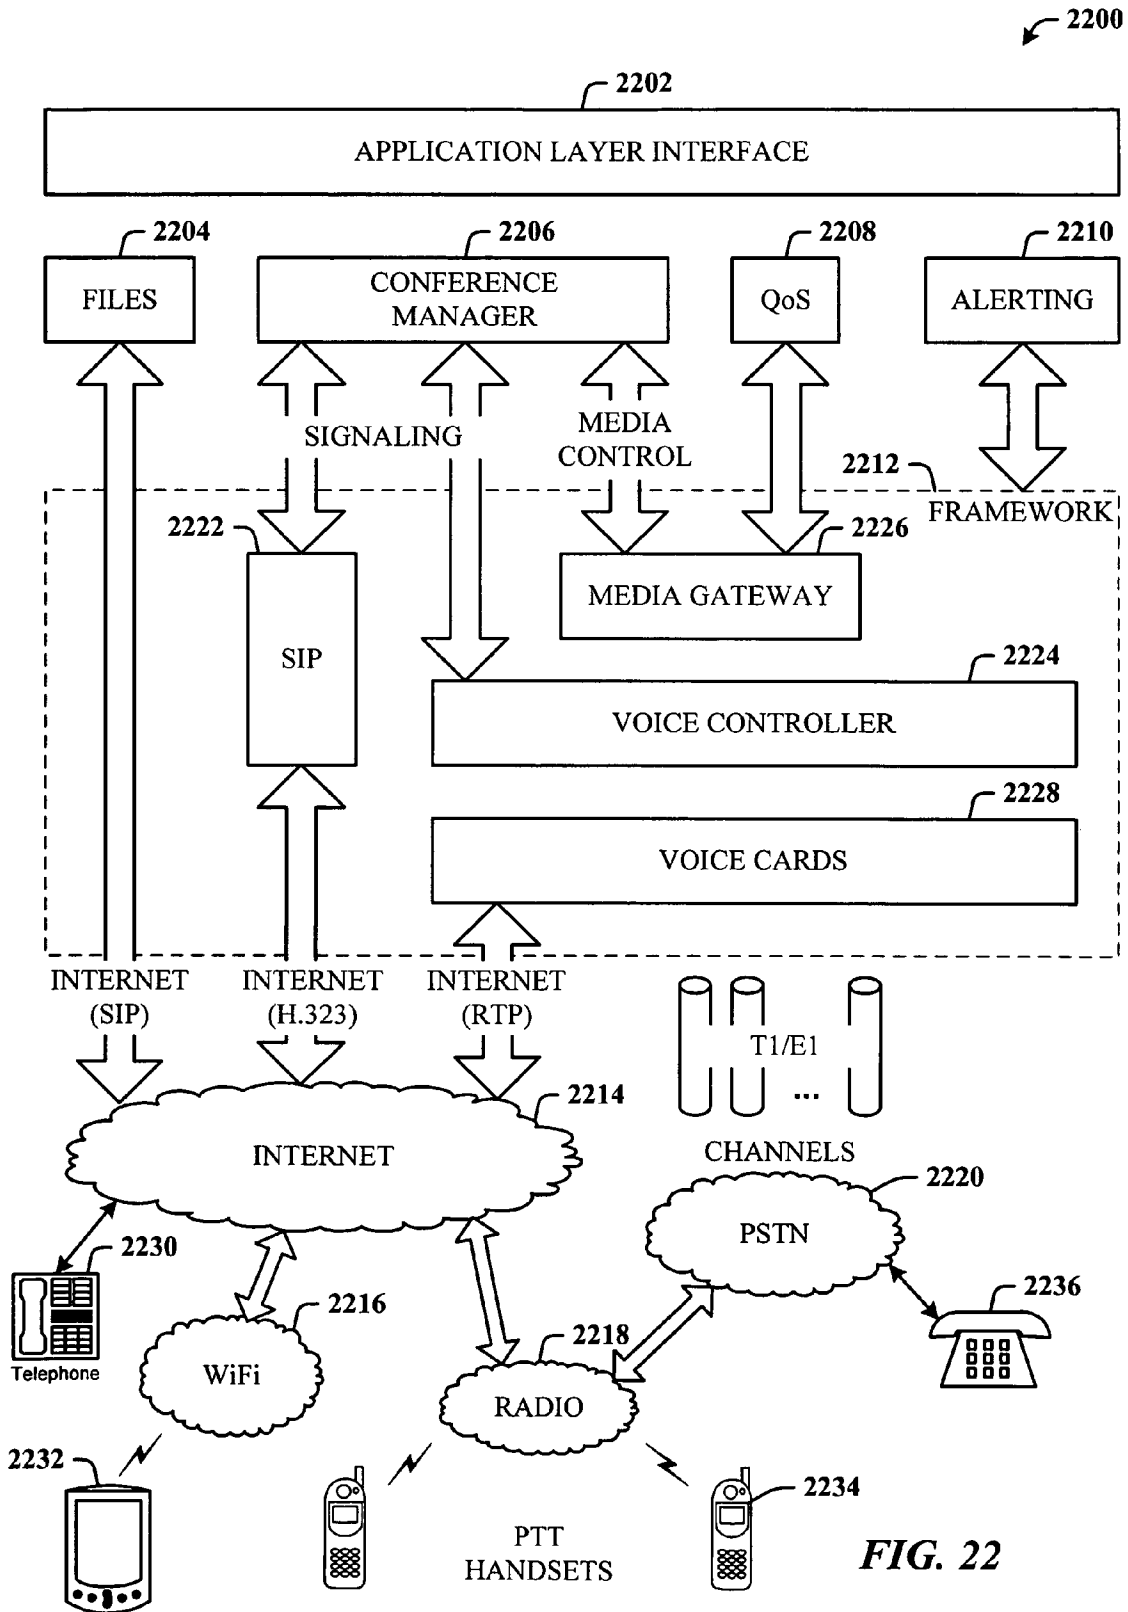


FIG. 22

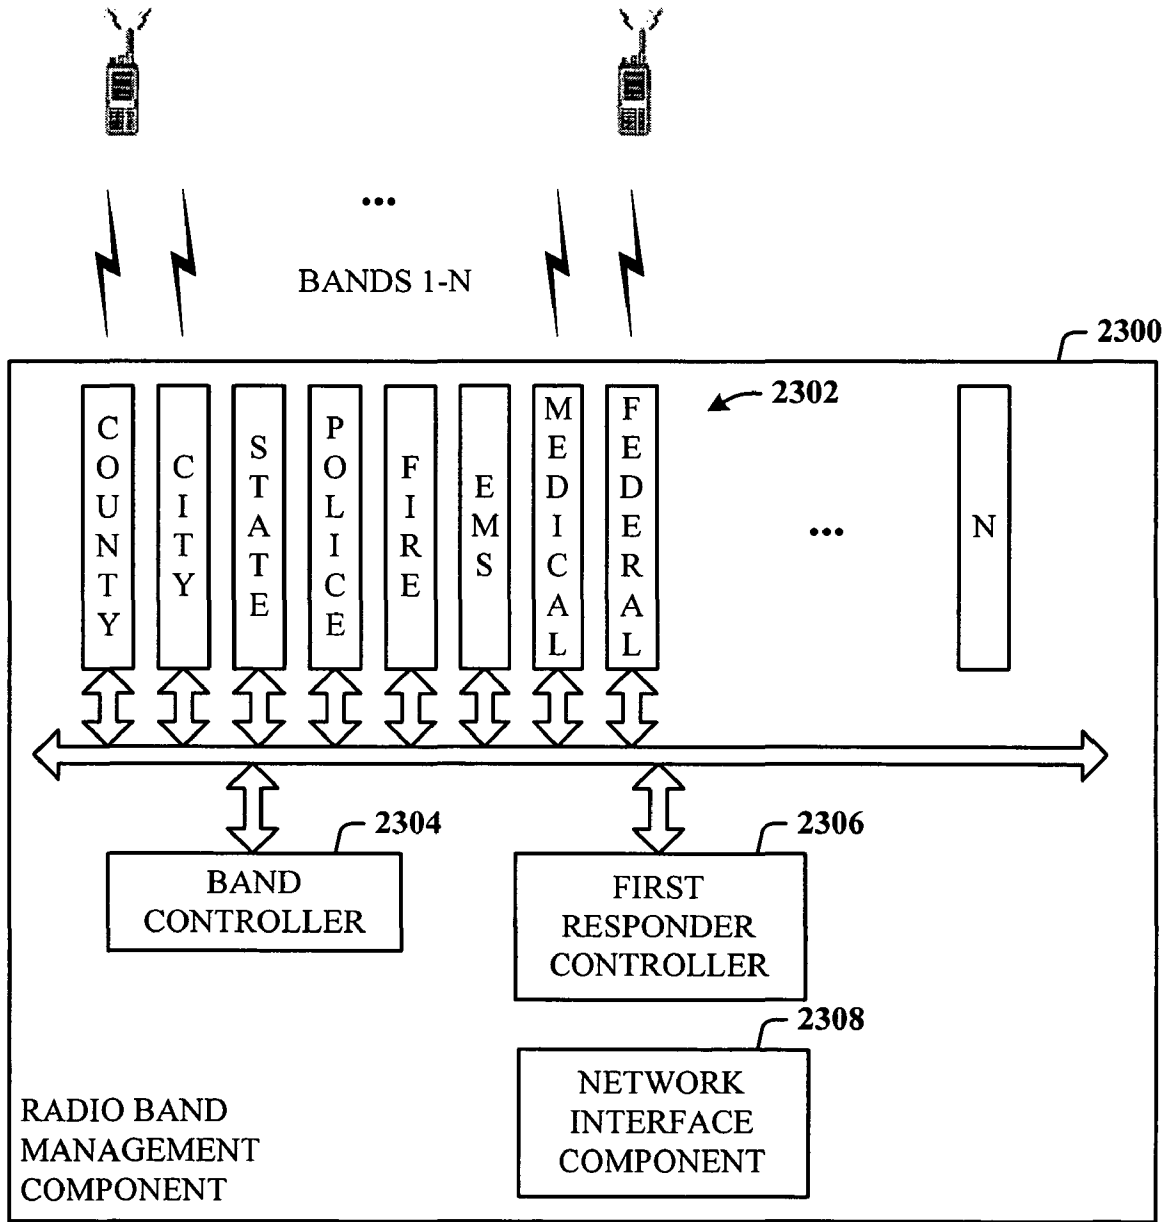


FIG. 23

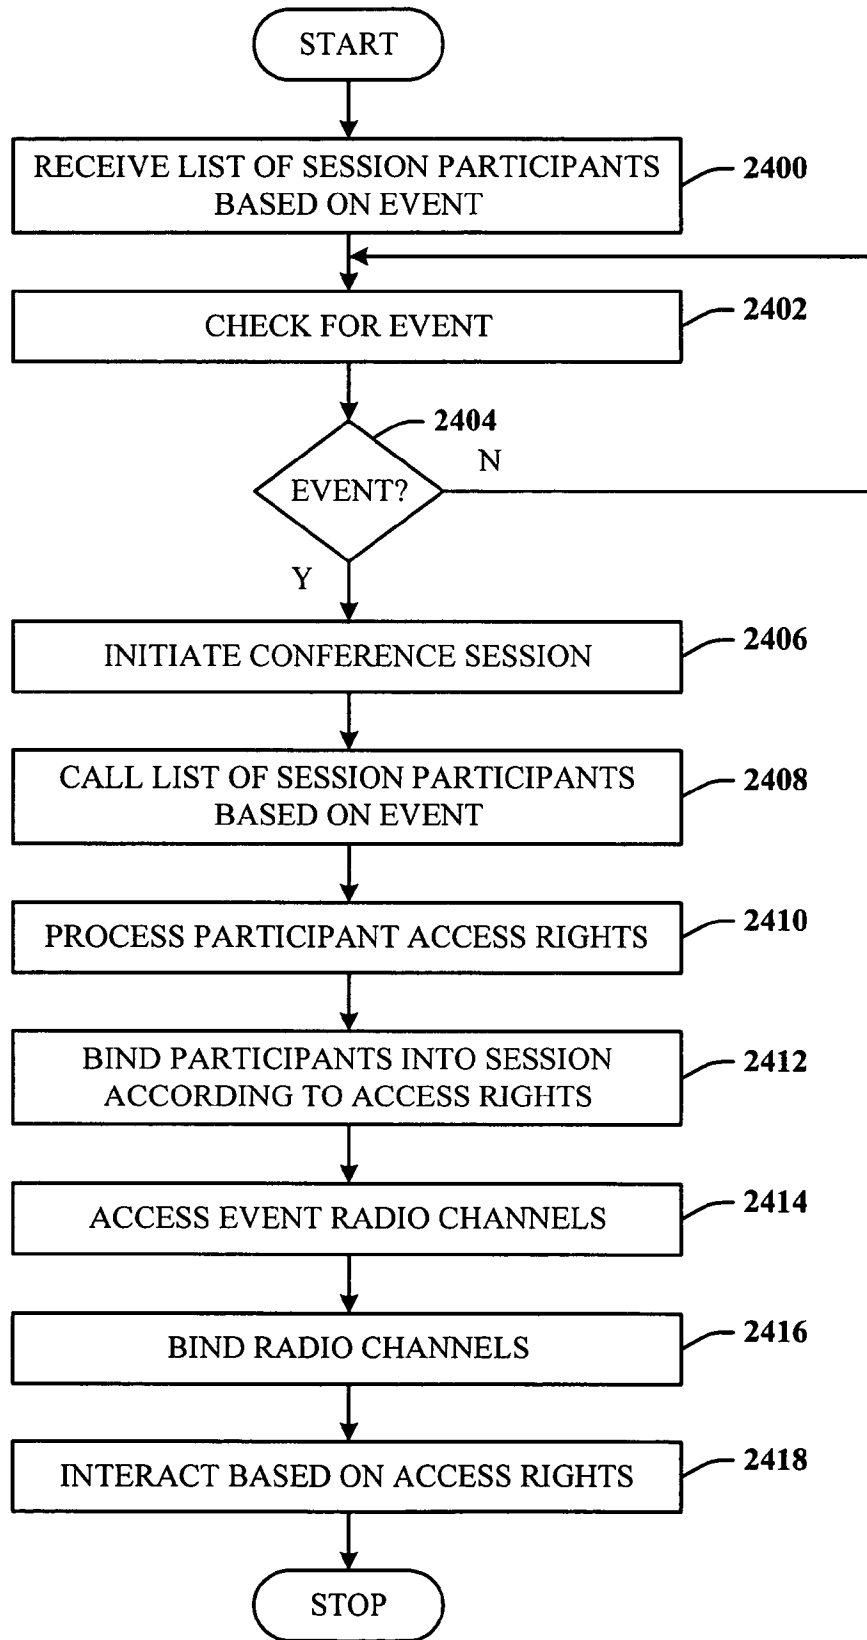


FIG. 24

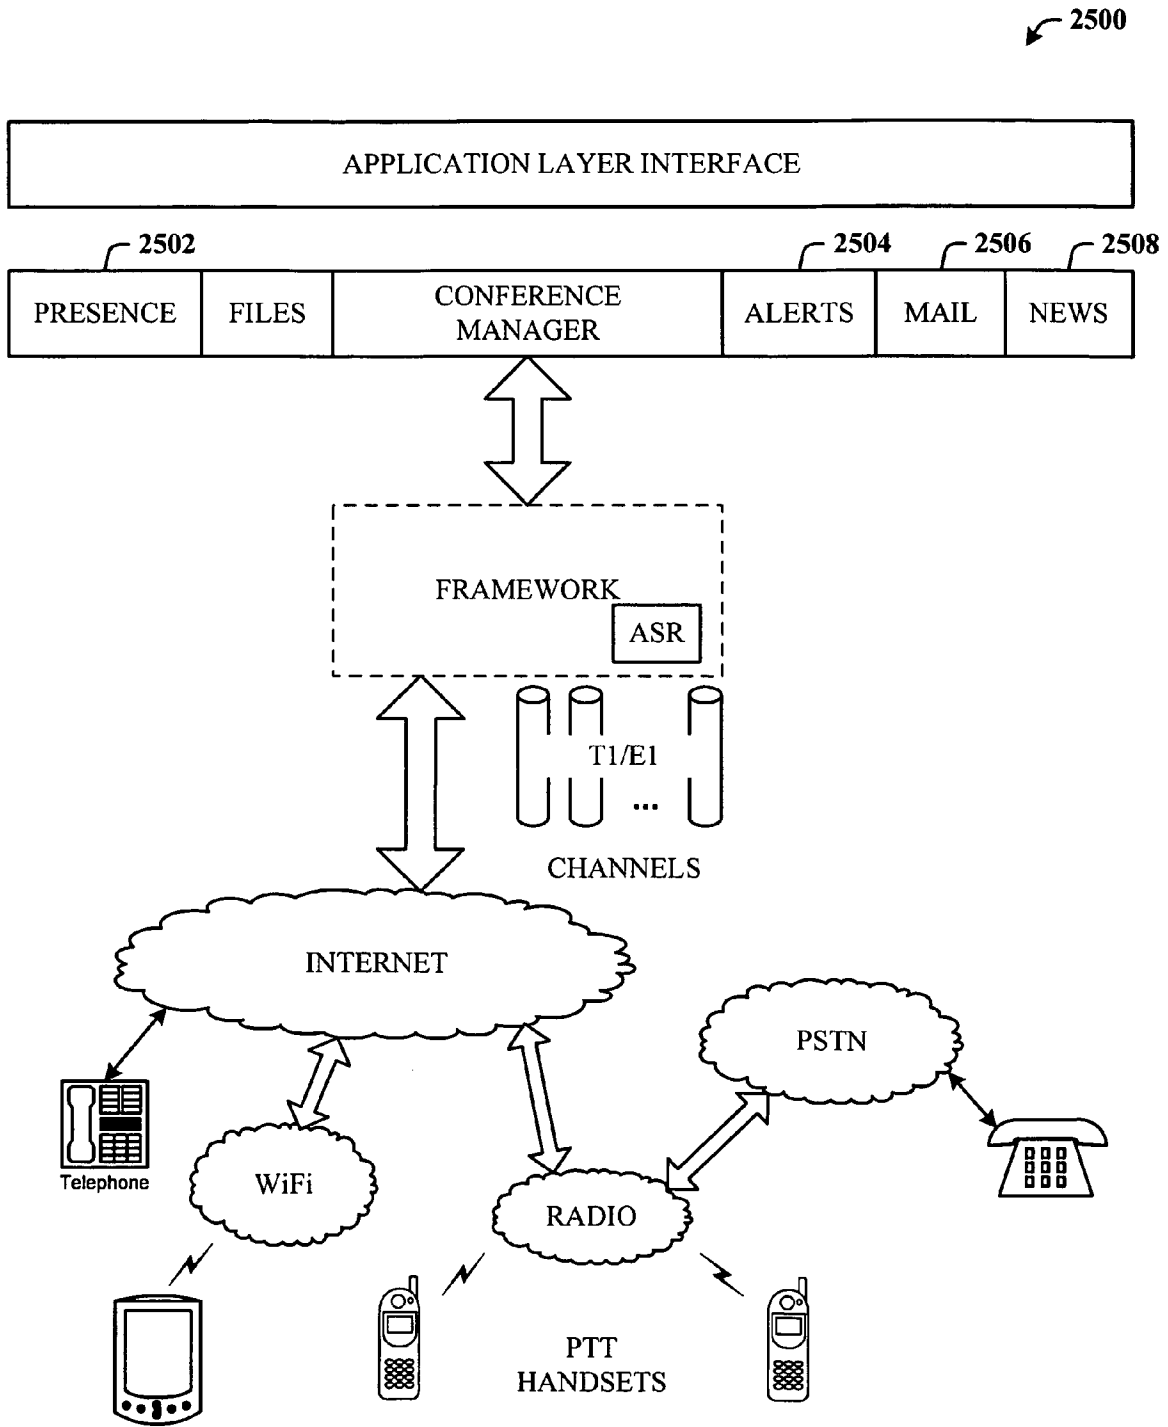


FIG. 25

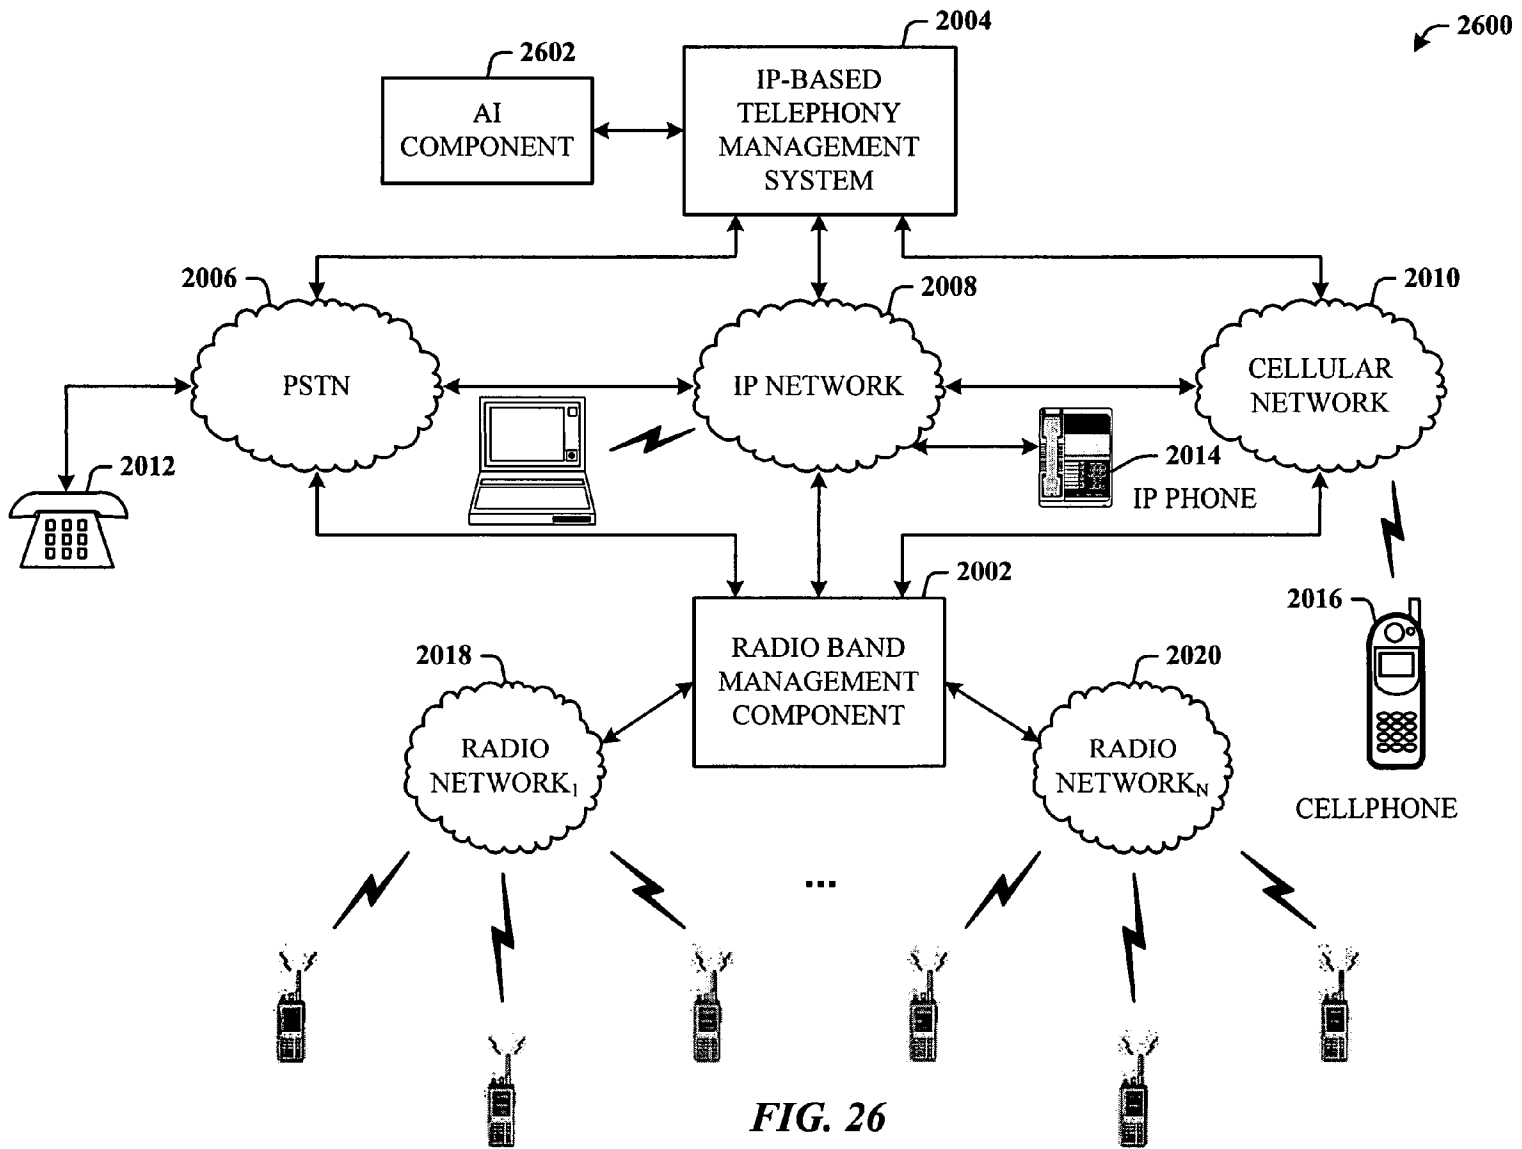


FIG. 26

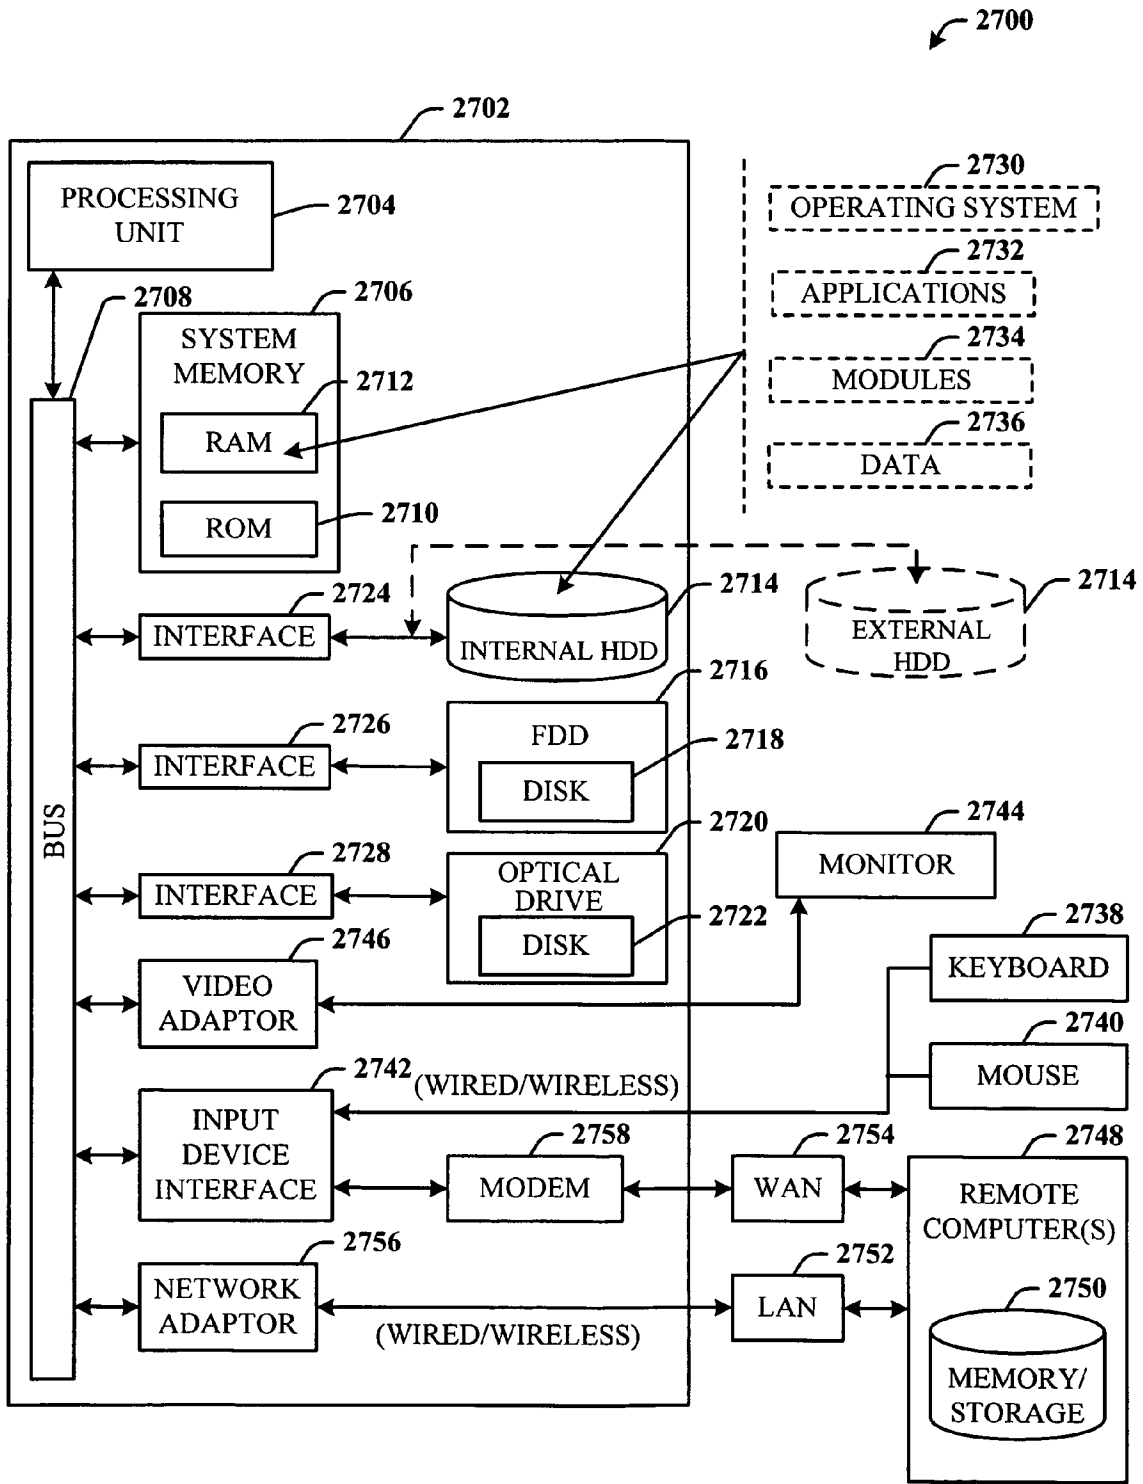


FIG. 27

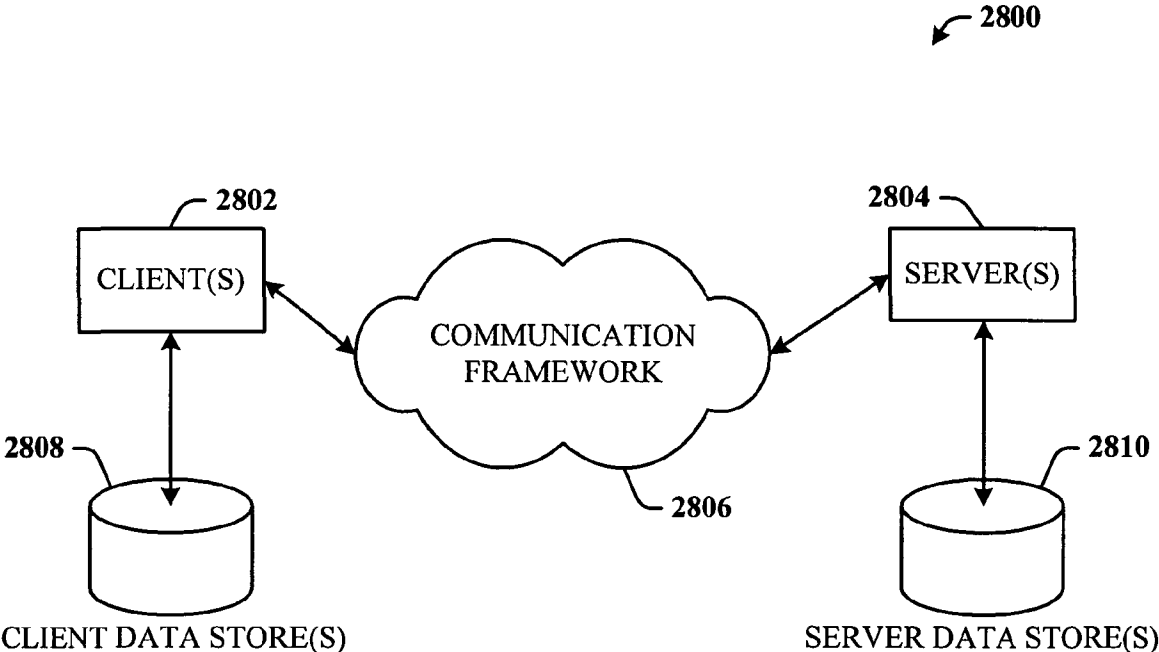


FIG. 28

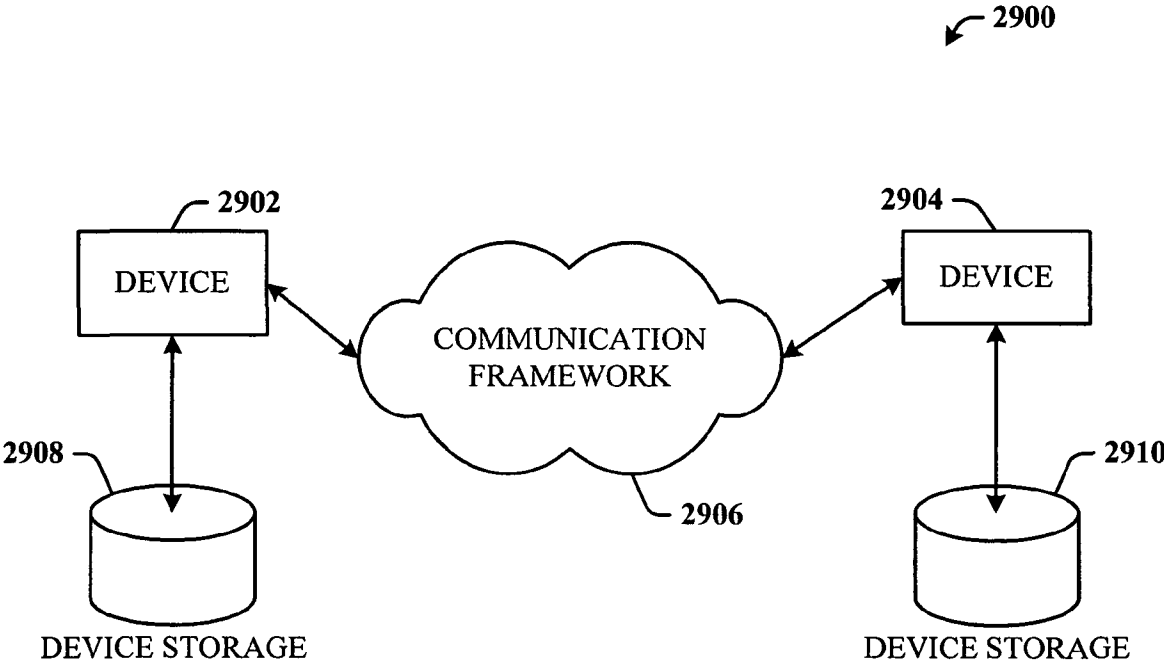


FIG. 29

RADIO/TELEPHONY INTEROPERABILITY SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application Ser. No. 60/621,858 entitled "RADIO/TELEPHONY INTEROPERABILITY SYSTEM FOR EMERGENCY SERVICES" and filed Oct. 25, 2004. This application is also a Continuation-in-Part of U.S. patent application Ser. No. 10/979,611 entitled "COMMUNICATION SYSTEM AND METHOD", filed Nov. 2, 2004, which claims the benefit of U.S. Provisional Patent Application Ser. No. 60/516,307 entitled "COMMUNICATION SYSTEM AND METHOD" and filed Nov. 3, 2003. The entireties of the above-noted applications are incorporated by reference herein.

TECHNICAL FIELD

This invention is related to web-supported teleconferencing systems, and more specifically, to interfacing such teleconferencing systems to mobile radio systems for communications with elected officials and first responder emergency communications, for example.

BACKGROUND

The advent of global communications networks such as the Internet has facilitated numerous collaborative enterprises. In addition to basic e-mail exchanges and intercommunications, such communications networks offer the opportunities to provide communications arrangements (e.g., voice conferencing, video conferencing, the combination of which plus multimedia that can be exchanged during a session are referred to herein as teleconferencing) whereby many customers can be bridged together on a media connection. Individuals and business people seek to communicate with each other, obtain useful information, interact commercially and entertain themselves in an increasingly mobile society. In order to fulfill these needs, one requires the capability to send and receive messages, access information and entertainment content, conduct business transactions, organize daily schedules and generally, stay in touch with homes and offices from almost anywhere, at any time, as easily as making a telephone call.

The challenge of communications interoperability has plagued public safety agencies. Such interoperability can give first responders, elected officials and public safety agencies the capability to exchange voice and data on-demand and in real time, when needed and as authorized. However, national security incidents (e.g., terrorist attacks, bombings, . . .) and natural disasters (e.g., hurricanes, earthquakes, floods, . . .) have exposed that true interoperability requires first responders and elected officials to be able to communicate not just within their units, but also across disciplines and jurisdictions. Additionally, full communications interoperability is required at all levels, for example, at the local, state, and federal levels.

Conventional network availability has proven to be difficult to maintain in unpredictable environments such as firestorms, natural disasters, and terrorist situations. Too often communications depend on access to fixed or temporary infrastructure and are limited by range or line-of-sight constraints. Moreover, radio interoperability between jurisdictions (e.g., local, state, federal) is always an issue for respond-

ers and has become a homeland security matter. Furthermore, proprietary radios and multiple standards and their lack of interoperability with wired and wireless telephony (also called telecommunications) networks make it virtually impossible for different agencies to cooperate in a scaled response to a major disaster.

The ability to determine if a first responder is on the net or available, i.e. "presence" is critical to the successful execution of any crises management situation. This concept is particularly difficult to implement, enforce and manage for radio networks.

Accordingly, reliable wireless and/or wired communications that enable real-time information sharing, constant availability, and interagency interoperability are imperative in emergency situations. Additionally, greater situational awareness is an increasingly important requirement that enables emergency first responders to know each other's position in relation to the incident, terrain, neighborhood, or perimeter being secured. Live video, voice communication, sensor, and location data provide mission-critical information, but low-speed data networks cannot meet the bandwidth requirements to support such critical real-time information.

When catastrophic emergencies happen, a comprehensive coordinated effort based on timely, effective communications between fire, police, emergency services and/or elected officials is necessary to cope with the situation. Therefore, what is needed is an improved interoperable emergency and security communications architecture. In addition, this architecture should embody services that support presence as well as notification and alarm transmission.

SUMMARY OF THE INVENTION

The following presents a simplified summary of the invention in order to provide a basic understanding of some aspects of the invention. This summary is not an extensive overview of the invention. It is not intended to identify key/critical elements of the invention or to delineate the scope of the invention. Its sole purpose is to present some concepts of the invention in a simplified form as a prelude to the more detailed description that is presented later.

Disclosed herein is a radio/telephony interoperability architecture that facilitates intercommunications between a security and/or emergency services network and a telephony management component for one-way and two-way security and/or emergency teleconferencing communications. The telephony management component creates a session in which one or more session participants can communicate with front-line mobile radio operators (e.g., first responder personnel) and radio band components. Mobile radio systems can be accessed via circuit-switched and/or packet-switched networks with communications capable of existing between horizontal services entities (e.g., city fire and police) and vertical entities (e.g., city, state, and federal agencies and personnel).

Accordingly, the invention disclosed and claimed herein, in one aspect thereof, comprises a system that facilitates security and/or emergency services communications. The system can include an emergency communications network component that facilitates at least emergency mobile radio communications, and an Internet-based communications management component that interfaces to the emergency communication networks to facilitate intercommunications therebetween. Note that although called an Internet-based component, it is to be understood that the network can be any IP-based network. The Internet-based communications management component can communicate at least via VoIP

3

(Voice over Internet Protocol). The emergency communications network component facilitates communications to at least one of wired and wireless telephone communications systems. The Internet-based communications management component can communicate emergency services information to a group of conference call participants via a single PIN (Participant Identification Number).

In another aspect thereof, the Internet-based communications management component facilitates one-way and two-way communications, where the one-way communications can be for emergency alerts, and the two-way communications can be for teleconferencing, for example.

In another aspect of the subject invention, the system further comprises an artificial intelligence component that employs a probabilistic and/or statistical-based analysis to prognose or infer an action that a user desires to be automatically performed.

In yet another novel aspect, presence data can be detected and processed to determine if a user (e.g., mobile radio user) is available and in a certain area.

In still another novel aspect, Automatic Speech Recognition (ASR) can be employed in the dialog with participants on a mobile radio network who do not have handsets equipped with DTMF (dual tone multi-frequency) keys.

To the accomplishment of the foregoing and related ends, certain illustrative aspects of the invention are described herein in connection with the following description and the annexed drawings. These aspects are indicative, however, of but a few of the various ways in which the principles of the invention can be employed and the subject invention is intended to include all such aspects and their equivalents. Other advantages and novel features of the invention will become apparent from the following detailed description of the invention when considered in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a call session system in accordance with the subject invention.

FIG. 2 illustrates a methodology of call conferencing in accordance with the invention.

FIG. 3 illustrates more detailed system diagram of the telephone call processing system of the subject invention.

FIG. 4 illustrates a methodology of performing call conferencing in accordance with the invention.

FIG. 5 illustrates a methodology of processing greetings in accordance with the invention.

FIG. 6 illustrates a methodology of connecting a conference participant to the appropriate conference call session in accordance with the invention.

FIG. 7 illustrates a methodology of creating a new conference call in accordance with the invention.

FIG. 8 illustrates a methodology of processing a received facsimile in accordance with the invention.

FIG. 9 illustrates a methodology of capturing incoming information in accordance with the invention.

FIG. 10 illustrates a methodology of processing an e-mail address book in accordance with the invention.

FIG. 11 illustrates a methodology of managing a conference call session in accordance with the invention.

FIG. 12 illustrates a methodology of managing a session by a host in accordance with the invention.

FIG. 13 illustrates a methodology of managing a conference call session in a no-host manner in accordance with the invention.

4

FIG. 14 illustrates a general system configuration of the present invention.

FIG. 15 illustrates a sample PIN card that can be used to access a conference call in accordance with the invention.

FIG. 16 illustrates a radio/telephony interoperability architecture in accordance with the subject invention.

FIG. 17 illustrates a methodology of providing radio/telephony interoperability for security/emergency services in accordance with the invention.

FIG. 18 illustrates a methodology of providing radio/telephony interoperability in accordance with the invention.

FIG. 19 illustrates a more detailed diagram of a radio/telephony interoperability system in accordance with the subject invention.

FIG. 20 illustrates an infrastructure framework for interfacing a radio management component and an IP-based telephony management system.

FIG. 21 illustrates a radio/telephony interoperability communications system that facilitates horizontal/vertical communications in accordance with an innovative aspect.

FIG. 22 illustrates a block diagram of an exemplary telephony management communications system in accordance with an innovative aspect.

FIG. 23 illustrates an exemplary radio band management component in accordance with an aspect of the invention.

FIG. 24 illustrates a methodology of creating a session and binding participants into a session in accordance with the subject innovation.

FIG. 25 illustrates a conference management architecture that employs presence processing in accordance with an innovative aspect.

FIG. 26 illustrates a system that employs a machine learning and reasoning component as part of an artificial intelligence component that facilitates automating one or more features in accordance with the subject innovation.

FIG. 27 illustrates a block diagram of a computer operable to execute aspects of the disclosed architecture.

FIG. 28 illustrates a schematic block diagram of an exemplary computing environment in accordance with the subject invention.

FIG. 29 illustrates a schematic block diagram of an exemplary peer-to-peer environment in accordance with the subject invention.

DETAILED DESCRIPTION OF THE INVENTION

The invention is now described with reference to the drawings, wherein like reference numerals are used to refer to like elements throughout. In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the subject invention. It may be evident, however, that the invention can be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to facilitate describing the invention.

As used in this application, the terms "component" and "system" are intended to refer to a computer-related entity, either hardware, a combination of hardware and software, software, or software in execution. For example, a component can be, but is not limited to being, a process running on a processor, a processor, an object, an executable, a thread of execution, a program, and/or a computer. By way of illustration, both an application running on a server and the server can be a component. One or more components can reside within a process and/or thread of execution, and a component can be localized on one computer and/or distributed between two or more computers.

As used herein, the term to “infer” or “inference” refer generally to the process of reasoning about or inferring states of the system, environment, and/or user from a set of observations as captured via events and/or data. Inference can be employed to identify a specific context or action, or can generate a probability distribution over states, for example. The inference can be probabilistic—that is, the computation of a probability distribution over states of interest based on a consideration of data and events. Inference can also refer to techniques employed for composing higher-level events from a set of events and/or data. Such inference results in the construction of new events or actions from a set of observed events and/or stored event data, whether or not the events are correlated in close temporal proximity, and whether the events and data come from one or several event and data sources.

Referring now to FIG. 1, there is illustrated a call session system 100 in accordance with the subject invention. The system 100 includes one or more call processing components 102 (denoted $CPC_1, CPC_2, \dots, CPC_N$) that provide the capability to receive and transmit calls via call lines 104 (e.g., as provided by digital T1 and E1 communications architectures), and process signals and data for at least the management of call conferencing. The one or more call processing components 102 intercommunicate control signals and data across a non-voice communications bus 106. In accordance with a novel aspect of the subject invention, a session component 108 resides on the bus 106 in communication with the one or more call processing components 102 to facilitate routing of one or more of the calls across the non-voice communications bus 106, which is a departure from the designed purpose of the bus 106.

The session component 108 bridges the one or more call processing components 102 across the bus 106 in such a way that is significantly more efficient and allows for dynamic assignment of ports across the multiple cards at the time of receiving or initiating a call. Conventionally, software is written to allocate an assigned port for a received call, and use that port until the call is finished. In the system of the invention, the system does not even consider which port to allocate until the call starts, allocates the first available port, and dynamically allocates more or less ports as the demand increases and decreases. During the session, the system knows which ports are being used, and at the end of the session, releases the ports back into the pool of ports to be re-utilized.

In support of call management, the session component 108 can manage a single call across processing resources (e.g., DSP—digital signal processor resources) of at least two of the CPCs (e.g., CPC_1 and CPC_2). Additional features of echo cancellation, noise reduction, volume control, etc., are facilitated by dedicating some of the DSP resources of the CPCs for these purposes. It is within contemplation of the subject invention that other functions can be dedicated to additional DSP resources where suitable code is provided.

The system 100 also includes an access component 110 that facilitates user interaction with features provided in code by the session component 108. The system 100 exposes itself as a network-based API (application program interface) that facilitates processing of general functions, for example, “dial this number”, “play this .wav file on this line”, “bind this line into this conference call”, and “create a new conference call.” In contrast, the session component 108 manages the ports and DSP resources as one large entity of ports and resources.

The session component 108 interfaces to a CTI (computer telephony interface) component 112 that exposes itself as a remote Java™ API to which the access component 110 interfaces. Thus, the graphical user interface provided by a

browser interfaces to the CTI component 112, and not to the session component 108 and underlying hardware and software. Note that although the CTI component 112 is shown internal to the system 100, it can be implemented as a separate entity external to the system 100, as hosted on a personal computer, for example.

The bus 106 is a secondary bus that typically handles signals and data, and which are non-voice communications. One example of the communications architecture employed by the bus 106 is an MVIP (multi-vendor integration protocol) architecture. Another more recent enhancement to the MVIP architecture provides the basis for H.100 bus and H.110 bus architectures, such as found on a model AG4000C board, and other suitable boards manufactured by NMS Communications, of Framingham, Mass.

Referring now to FIG. 2, there is illustrated a methodology of call conferencing in accordance with the invention. While, for purposes of simplicity of explanation, the one or more methodologies shown herein, e.g., in the form of a flow chart, are shown and described as a series of acts, it is to be understood and appreciated that the subject invention is not limited by the order of acts, as some acts may, in accordance with the invention, occur in a different order and/or concurrently with other acts from that shown and described herein. For example, those skilled in the art will understand and appreciate that a methodology could alternatively be represented as a series of interrelated states or events, such as in a state diagram. Moreover, not all illustrated acts may be required to implement a methodology in accordance with the invention.

At 200, a call is received at a CPC. The user, in accordance with the invention, also provides an ID, as indicated at 202. This can be a participant ID that indicates the caller is a participant in a conference call session, or a host ID that indicates the caller will be the host of the conference call. At 204, the CPC that received the call signals the session component across the non-voice communications bus. At 206, the session component responds across the non-voice communications bus by dynamically allocating ports and DSP resources, across CPCs, if necessary. If necessary, at 208, the call is routed over the non-voice communications bus to be processed by the assigned resources on a different CPC than the one that received the call. At 210, the call is bound to a conference call session. At 212, the session component is signaled with respect to one or more recordings that can be played in association with the call. At 214, the system checks if the call is over. If no, flow loops back to keep checking. If yes, at 216, the session component disconnects the call and releases the associated port. If the call is the last of the session, the associated DSP resources will also be released for reassignment to another call session.

Referring now to FIG. 3, there is illustrated more detailed system diagram of the telephone call processing system 300 of the subject invention. The system 300 (similar to system 100 of FIG. 1) receives incoming calls over voice lines, such as T1 and E1 digital communications connections. One or more separate lines can be provided for each CPC card 302 (denoted here as CPC Card1, CPC Card2, and CPC Card3). Each of the CPC cards 302 includes DSP resources 304 (represented as DSP blocks $DSP_1, DSP_2, \dots, DSP_N$) to which an incoming call is assigned for processing. In accordance with the subject invention, each of the DSP resources 304 is allocated to perform same or different tasks. For example, a first DSP resource (DSP_1) can be allocated for echo cancellation, a second DSP resource (DSP_2) can be allocated for volume control, and a third DSP (not shown) can be allocated for noise reduction, all of which are associated with one or more calls.

The allocation of such DSP resources **304** is accomplished by the session software component **108** (designated as the VRU—voice response unit) that communicates associated commands across the non-voice communications bus to the respective CPC cards **302**. Moreover, a call received at a first CPC card **306** can be routed across to a second CPC card **308**, via the non-voice communications bus. Thus, the burden of call processing can be scaled to another card. Ultimately, all CPC processing cards and incoming voice lines appear to be one large bound conference-calling platform.

The CTI component **112** facilitates interfacing to the system **300** such that high level commands can be processed and communicated to the session component **108** for execution across the non-voice communications bus **106** to the CPC cards **302**.

At a higher level, the many call conferencing benefits and functions can be performed in accordance with the system **300** of the subject invention. A user can interface to the system **300** to facilitate a conference call, by initiating contact with prospective participants, binding callers to a specific conference call session, muting, disconnecting, and performing many other functions in accordance with the subject invention.

Referring now to FIG. 4, there is illustrated a methodology of performing call conferencing in accordance with the invention. The system is capable of simultaneously dialing several participants at once and binding them to a conference call. Accordingly, at **400**, a conference call session is initiated. At **402**, a list of participants is received. At **404**, the list is processed into electronic call instructions. At **406**, the call instructions are processed to initiate calls substantially simultaneously to all participants on the list.

Referring now to FIG. 5, there is illustrated a methodology of processing greetings in accordance with the invention. The software is also capable of calling a conference call host (referred to herein as a “hosted” conference call session), prompting the host for a custom greeting, recording the custom greeting, and replaying the custom greeting to other participants invited to the conference call. Accordingly, at **500**, a conference call session is initiated. At **502**, a list of participants is received and processed. At **504**, a host is called and prompted to enter a custom greeting. At **506**, the custom greeting is input by the host and stored. At **508**, call instructions are initiated substantially simultaneously to all participants. At **510**, the custom greeting is played back to the session participants who are then logged in to the session. Where a host is not designated, this is referred to herein as a “non-hosted” conference call session.

Referring now to FIG. 6, there is illustrated a methodology of connecting a conference participant to the appropriate conference call session in accordance with the invention. At **600**, several conference call sessions have been initiated and/or are in session. At **602**, the system receives an incoming call of a session participant. At **604**, the system prompts the caller to enter an ID code. At **606**, the system processes the ID code, and binds the caller as a participant into the conference call session that corresponds to the ID code.

Referring now to FIG. 7, there is illustrated a methodology of creating a new conference call in accordance with the invention. At **700**, a conference call is initiated. At **702**, an incoming call is received. At **704**, the caller is prompted for an ID code. At **706**, the ID code is processed, and a new conference call session created.

Referring now to FIG. 8, there is illustrated a methodology of processing a received facsimile in accordance with the invention. At **800**, the system receives an incoming call, and analyzes the call signals. At **802**, if the incoming call is a fax

transmission, flow is to **804** to convert the fax document to an image file format (e.g., a TIFF file) and store the converted document to a hard drive or other storage device. At **806**, the image file is processed by optical character recognition (OCR) into plain text data. At **808**, the plain text of the fax can be written to a file for indexing and insertion into a database. At **802**, if the call is not a fax, flow is to **810** to process the call normally as a voice call.

Referring now to FIG. 9, there is illustrated a methodology of capturing incoming information in accordance with the invention. At **900**, an incoming call is received. At **902**, the caller is prompted to enter an ID code. At **904**, the system processes the ID code, and writes the telephone number and ID code of the prospective conference call participant in association therewith to a flat file. At **906**, the flat file is then stored for later processing.

Referring now to FIG. 10, there is illustrated a methodology of processing a list of names for a conference call in accordance with the invention. The list of names can be obtained from any data source. For example, in one implementation, a user may establish “groups” from an address book such as that found in Microsoft Outlook™, for example, and the software is capable of allowing the conference manager to invite each member of the group to participate in the conference call via a graphical user interface (GUI) with a single input action (mouse-click). Accordingly, at **1000**, a data source (e.g., an e-mail application) is accessed. At **1002**, a list of names (e.g., an address book) is accessed therefrom. At **1004**, grouping information (e.g., from within the address book) is detected, if available. At **1006**, a conference call session is initiated (e.g., based on the grouping information), and according to a single user click and/or interaction with the GUI. At **1008**, a database of telephone numbers is accessed from a database. At **1010**, each member of the list (e.g., the group) is called using the corresponding member telephone number. As indicated supra, the list of names and any associated grouping information can be obtained from any program and/or data source such as a contacts file stored in an e-mail program, a contacts file stored in a PDA, a cell phone address book, and so on.

Referring now to FIG. 11, there is illustrated a methodology of managing a conference call session in accordance with the invention. The system of the subject invention permits callers to be added, muted, and/or dropped at any time, and allows callers to change phones in mid-call. The system can call out to participants simultaneously, eliminating the need to wait for everyone to get online, or can let them call in, adding them at any time. The system can send reminders using a variety of mechanisms with the agenda and minutes automatically prior to calls, during calls, and in written summaries of conference call sessions afterwards. In one implementation, the system enables up to fifty-five participants to be bound at one time into a conference call session. However, this is not to be construed as limiting, since additional capacity in terms of hardware and/or software facilitates the addition of a greater number of session participants is within contemplation and scope of the invention.

Accordingly, at **1100**, the system can automatically send a reminder to each potential session participant via e-mail or other messaging mechanisms (e.g., SMS-short message service, MMS-multimedia messaging service, . . .), and with an automatically attached session agenda and file attachments. At **1102**, the conference call session is initiated. At **1104**, a caller can be added to the session at anytime. At **1106**, a session participant can be dropped from the session at anytime. At **1108**, a session participant can be muted at anytime. At **1110**, a session participant can be allowed to change tele-

phones at anytime during the session. At **1112**, the conference call session ends. At **1114**, a session summary can be automatically sent to each participant and/or to any non-participant.

Referring now to FIG. **12**, there is illustrated a methodology of managing a session by a host in accordance with the invention. Conference calls may be managed from virtually any computing device and/or telephone, e.g., a touch-tone phone, mobile telephone, personal computer or a wireless PDA (e.g., a Palm™ PDA). More particularly, in keeping with a particularly preferred aspect of the invention, users or participants can dial-in using a Participant Identification Number (PIN), while the host dials in with another PIN (called a host PIN) that can be used to control when the conference starts, for example. In this way, only when the host dials-in will the other callers be connected. This is a particularly effective method for a manager or other supervisor to maintain better control over their conference call session. Additionally, it allows customers the opportunity to issue credit card size conference calling cards containing a permanent host PIN and participant PIN to each person who wishes to make conference calls, without ever even having to use a browser interface.

At **1200**, a participant/host card is provided with corresponding PINs for each function. At **1202**, the caller initiates a host-sponsored (or hosted) conference call session. At **1204**, invited participants log in using the participant PIN. At **1206**, the system determines if the host has logged in to start the session. If so, at **1208**, flow is to **1210** to allow callers to check in to the session as participants. Alternatively, if the host has not logged in to start the session, no other participants will be allowed to log in, as indicated by **1212**. Flow is then back to **1206** to continue checking for the host login.

The browser interface can be used when more console control is desired over the call, such as viewing who is participating in the call and how each participant has been in the session and the how long the session has been in existence. A feature called "Hosted Meet Me" helps prevent potential overuse and misuse of single conferencing PINs. It also prevents the conference call from remaining "open" after the host hangs up. Hosted Meet Me is ideal for large companies that distribute thousands of conferencing PINs to managers, and for university virtual classrooms where the call cannot start until the professor dials in.

Referring now to FIG. **13**, there is illustrated a methodology of managing a conference call session in a no-host (or non-hosted) manner in accordance with the invention. A single PIN "Meet Me" feature is also provided via the subject invention. This feature issues an active PIN number that can be distributed to any person desired to be in a conference. No Host PIN is created, so whenever any one of these participants calls in, a conference call session can begin with any of the other people who received that PIN. This single PIN Meet Me feature is desirable in many situations where a group of people need equal ability for any of them to start a conference call, such as among an engineering team.

Accordingly, at **1300**, a single PIN session number is provided, in the form of, for example, a card. At **1302**, the PIN is distributed to potential conference participants. It is to be appreciated that the PIN can be provided by many other conventional means, for example, e-mail, telephone call, messaging to a messaging device, and so on. At **1304**, any person who has the PIN can dial-in to start the conference call session. At **1306**, the remaining participants can call to connect to the session at any time.

Referring now to FIG. **14**, there is illustrated a general system configuration **1400** of the invention. The system **1400**

includes a platform **1402** that hosts at least the data management tool, here called a web application server **1404**. The server **1404** provides a common layer to underlying services that include a database server **1406**, a VRU (voice response unit) **1408** (also called an interactive VRU or IVRU, and similar to the system **100** of FIG. **1** and system **300** of FIG. **3**) and mass storage system **1410**. The VRU **1408** facilitates interactive calling features for a user via remote touchtone signals and/or speech recognition facilities and to voice data to the caller such that the caller can make choices in response to predetermined options presented by the system.

The platform **1402** can utilize at least one multi-channel data communication connection **1412** (e.g., T1, DS3) into the VRU subsystem **1408** for communicating voice information and interacting with features of the platform **1402**. As indicated previously, the invention can accommodate user communication from virtually any accessible network node. To facilitate such an interface, the platform **1402** can include a processor **1414** suitable for XML (eXtensible Markup Language), XSLT (XML Stylesheet Language: Transformations), and SSL processing. The processor **1414** can also access web-based services utilizing SOAP (Simple Object Access Protocol). SOAP employs XML syntax to send text commands across the network using HTTP (HyperText Transport Protocol). Thus, there is a high-speed connection **1416** (e.g., broadband) that interfaces to the processor layer **1414** for use with multiple communication exchanges with remote users disposed on a global communication network **1417**. The remote users can access the platform system **1402** via a SSL or other secure connection **1418** using portable wired/wireless devices **1420**, and by way of the associated browsers **1422**.

The VRU subsystem **1408** also facilitates the recording of voice messages (e.g., voice mail) for access and retrieval at a later time. Additionally, the message is not restricted to access by a single user, but can be accessed by multiples users who are given the access authority (e.g., a PIN for a conference call session). The voice messages can be retrieved and presented via any number of different methods. For example, a user can access the voice message via a cell phone, VoIP phone, IP phone, a computer or computing device (e.g., desktop, laptop, tablet PC, PDA, and so on) by connecting to the system and providing sufficient credentials to access the message(s).

FIG. **15** illustrates a sample PIN card **1500** that can be used to access a conference call in accordance with the invention. The card **1500** includes access information in the format of a URL (uniform resource locator) address that can be used to enter into a conference call as a participant (using the participant PIN) or the host (using the host PIN). Other selections allow the caller to connect to an operator, access an options menu, add a participant, increase volume, drop the last participant, record a session, mute yourself, decrease volume, and unmute/request host attention, for example.

Communications between the CTI **112** and the session component **108** of FIG. **1**, which together can be considered the VRU **1408** of FIG. **14**, can be accomplished using many different programming codes. The code can facilitate a typical dial in process, entering of a PIN number, putting oneself on mute, and adding a participant using a DTMF (dual-tone multi-frequency) response of *1, for example. Both people then hang up.

In one implementation, the SCP (service control point) detects and receives an incoming call, and then sends a message to the VRU. An SCP is an SS7 (Signaling System 7) signaling point with access to a centralized database or enhanced service Intelligent Networking (IN) application. SS7 is an out-of-band signaling system that provides fast call

setup (using circuit-switched connections), and transaction capabilities for remote database interactions, such as for example, toll-free number translation databases, a HLR (home location register) and/or VLR (visitor location register) databases in wireless networks. The SCP handles all signaling, while all audio is handled by the VRU. In the case of an SS7 SCP, both the conference sentinel (*1) and the PIN (a number string) are detected by the switch and sent to the SCP as a "dialed digit string." The SCP will make a data query to validate the PIN. Once the PIN has been validated, the SCP accepts the connection and turns control of the call over to the VRU. A conference call session is created, a voice file can be played, and a participant added to the conference call session.

Alternatively, within the scope of the design is a configuration whereby no SCP is provided and all circuits terminate at the VRU. In this case, the call is connected and the user is requested to enter their PIN using the DTMF keys or alternatively, through the mechanism of the ASR. The PIN is then interpreted and validated by the VRU. Subsequent processing of the call and conference is the same for both cases of SCP/VRU as the primary end point. DSP resources are also managed to allocate ports for the calls. The conference call session can be configured by the session host. A session participant can be called in preparation for entry into the conference call session, then a caller can be added to the conference call session, a session participant removed from the current conference call session, and the conference call session terminated. In another implementation, the VRU does not send messaging via an SCP unit, but utilizes other means.

Radio/Telephony Interoperability Architecture

Referring now to FIG. 16, there is illustrated a radio/telephony interoperability architecture 1600 in accordance with the subject invention. The architecture 1600 facilitates interoperability communications of first responders (and responder radios such as push-to-talk radios), for example, with circuit-switched and/or packet-switched communications entities through the utilization of reliable wireless and/or wired communications that enable real-time information sharing, constant availability, and interagency interoperability during emergency and/or security situations. Additionally, the architecture 1600 provides greater situational awareness that enables emergency first responders to know each other's position in relation to the incident, terrain, neighborhood, or perimeter being secured, for example. The architecture 1600 facilitates the communication of live video and/or voice communication, sensing, and location data for mission-critical information, for example, when catastrophic emergencies and/or security needs arise, and affords a effective communications between fire, police, and emergency services on a horizontal level and jurisdictional communications on a vertical level between local, state, and/or federal entities.

The architecture 1600 includes an emergency/security communications system 1602 that provides communications for related entities (e.g., fire, police, medical, and governmental agencies). The architecture 1600 also includes an Internet-based communications component 1604 that can be disposed on an IP network. The Internet-based communications component 1604 interfaces to the emergency/security communications system 1602 to facilitate at least cellular and/or IP communications to and from the emergency/security communications system 1602. Note that although the component 1604 is referred to as Internet-based, it is to be understood that the component 1604 can be disposed on any IP network (e.g., a LAN). As depicted, the Internet-based communications component 1604 can also include and/or facilitate access to Web-based services and/or Internet telephony (e.g., VoIP). Accordingly, the Internet-based communications component

1604 is shown as including a Web-based service component 1606 and an Internet telephony component 1608. It is to be appreciated that either or both of the components (1606 or/and 1608) can be external to the Internet-based communications component 1604.

FIG. 17 illustrates a methodology of providing radio/telephony interoperability for security/emergency services in accordance with the invention. At 1700, a security/emergency services system is provided that processes mobile radio communications. At 1702, an Internet-based communications component is provided that can at least create conference call sessions of two or more participants. At 1704, the security/emergency communications system is interfaced to the Internet-based communications component such that mobile radio communications can be provided to other entities (e.g., via a conference call) and, alerts, notifications, and/or other content, for example, can be communicated to all desired entities and/or networks. At 1706, the Internet-based communications component facilitates conferencing, one and/or two-way communications of the alerts, notifications, and/or other content for all desired entities and/or networks via wired and/or wireless communications devices (e.g., cellular telephones, PDAs, IM messaging devices, etc.). It is to be understood that a single user can access the conferencing system and leave messages that can be later accessed and played back, for example.

FIG. 18 illustrates a methodology of providing radio/telephony interoperability in accordance with the invention. At 1800, an emergency/security services communications network and related systems is received for interfacing. At 1802, an Internet-based teleconferencing component is received. At 1804, the teleconferencing component is interfaced to the emergency/security system, such that alerts and/or other content can be communicated to and/or from the emergency/security services network to all desired entities, device, and/or networks. At 1806, the teleconferencing component communicates one and/or two-way teleconferencing of alerts, notifications, and/or other content between wired and/or wireless voice-capable and/or text messaging devices (e.g., cellular telephones, PDAs, IM messaging devices, etc.), entities and/or networks.

FIG. 19 illustrates a more detailed diagram of a radio/telephony interoperability system 1900 in accordance with the subject invention. The system 1900 can include an IP-based (e.g., the Internet) telephony management system 1902 that is disposed on an IP network (e.g., the Internet) thereby providing access for at least any authorized IP entity (e.g., user, network node, gateway, bridge, . . .). The telephony management system 1902 can further include a dynamic port-allocation router/hub system 1904 described in greater detail supra. The telephony management system 1902 interfaces to a radio band management component 1906 which can include a single radio band component or any combination of radio band components associated with security and/or emergency service entities. For example, the radio band components can be associated with radio frequencies utilized by police departments, fire departments, emergency medical support systems, weather systems, county, city, state and federal security/emergency agencies, first responder radios, and so on. Accordingly, the radio band management component 1906, if a combination of many different radio band components, can accommodate many different radio frequencies (denoted BANDS 1-N, where N is an integer).

The interoperability between the radio band management component 1906 and the telephony management component 1902 facilitates single or multiple conference-type sessions to be operable and any given time. In one implementation, all

that is required is a unique PIN (personal identification number) that a user needs to initiate a session or access an ongoing session. A user can initiate or access a multi-user session using wired and/or wireless communications devices. For example, where the emergency entity (e.g., police) are engaged in an ongoing situation using push-to-talk radios **1908**, a user of a cell phone, given proper access, can dial-in to an ongoing session that was initiated via the telephony management system **1902**. The user can be restricted to listen-only access (e.g., one-way communications) and/or listen/speak access (two-way communications). This can be initiated based on the type of PIN code provided.

In another example, alerting can be provided via a one-way communication (e.g., listen-only) and full teleconferencing by way of two-way communications (e.g., for a first responder participant). As indicated supra, the telephony management system **1902** is capable of processing multiple simultaneous one or many PIN, single or multiple user, sessions. That is, a first session can require that each participant utilize a different PIN when entering a single session. This provides control over who is a listen-only participant and who is a full participant (e.g., speak and listen). A second session, ongoing at the same time, can require that all participants use the same PIN to enter the second session. Accordingly, it can be appreciated that the telephony management system **1902** provides substantial flexibility and control over sessions (single user and multi-user).

The first session can be police first responders communicating in a first session, and the soon-to-arrive EMS (emergency medical services) personnel communicating in a second session. Although the sessions initially can be operational as separate sessions, depending on the changing circumstances of the situation, the sessions can be automatically combined, thereby providing merged access for all participants based on the pre-existing session rights. Thus, a listen-only participant of the first session is only granted listen-only rights when the sessions are merged.

For all sessions, the notion of presence of the participants can be recorded and rendered usable by participants and hosts alike.

FIG. **20** illustrates an infrastructure framework **2000** for interfacing a radio management component **2002** and an IP-based telephony management system **2004**. The framework **2000** can include the PSTN **2006** for allowing access to circuit-switched access, an IP network **2008** (e.g., the Internet) for allowing wired and/or wireless IP-based access, and/or a cellular network **2010** for wireless access. The telephony management system **2004** can interface to the radio management component **2002** via any one or more of these networks (**2006**, **2008**, and/or **2010**). Additionally, phone user(s) (e.g., **2012**, **2014**, and/or **2016**) on any of these respective networks (**2006**, **2008**, and/or **2010**) can gain access to the telephony management system **2004**, upon providing proper authorization credentials, which access will allow one-way and/or two-way communications with users communicating via the radio management component **2002**.

The radio management component **2002** can manage multiple radio networks each having the same or different frequency bands (denoted RADIO NETWORK₁, . . . , RADIO NETWORK_N, where N is an integer). Thus, a first radio network **2018** can be associated with radio traffic of a first responder police unit and a second radio network **2020** can be associated with radio traffic a first responder fire unit, for example. As indicated supra, the telephony management system **2004** can facilitate the merger of separate conferencing sessions currently underway by the first radio network **2018**

and the second radio network **2020**. Additionally, other management controls and restrictions can be applied for the merger.

The previously applied merger can also be automatically “un-merged” or segregated, as desired. For example, as the number of personnel assigned to the situation begins to respond or enter a conference session, the amount of chatter or traffic may become confusing, counterproductive and inefficient such that segregation of the sessions is more desirable. Accordingly, those session participants who entered the session under a first PIN can automatically be reassigned to another session associated with the first radio network, and the session participants who entered the session under a second PIN can automatically remain in the current session, or be reassigned to a new session that is associated with the second radio network. As can be understood, the capability to manage sessions and session participants in accordance with the subject telephony management system can provide significant advantages and improvements over conventional architectures.

Depicted are two sessions, a first session **2022** and a second session **2024**, which are being managed by the telephony management system **2004**. The first session **2022** includes the following participants: a caller of phone **2022** (denoted PH1), a first radio operator (R1) of the first radio network **2018**, a second radio operator (R2) of the first radio network **2018**, a computer user (C1) in wireless communications with the IP network **2008**, and a sixth radio operator (R6) of the second radio network **2020**. The second session **2024** includes the following participants: a caller of cell phone **2016** (denoted PH3), a fourth radio operator (R4) of the second radio network **2020**, a fifth radio operator (R5) of the second radio network **2020**, the sixth radio operator (R6) of the second radio network **2020**, and a caller using the IP phone **2014** (denoted PH2). Note that a radio operator can be a participant in more than one session, simultaneously (see R6), various types of telephones (e.g., **2012**, **2014**, and/or **2016**) and other computing devices (e.g., computer C1) can access the system **2004** and sessions (e.g., **2022** and/or **2024**), and over various types of networks (e.g., **2006**, **2008**, and/or **2010**). Session participants can drop in and out of sessions at any time, be moved from one session to another at any time, be restricted or limited in the type of session access, communicate with selected radio networks and radio operators, access recorded messages, leave recorded messages, and so on.

The presence of attendees and the status of their participation in any specific session are maintained by the presence service that is an element in the framework. The presence status may also be used by an authorized user to request how and where a particular person, who is not a current participant, may be contacted.

FIG. **21** illustrates a radio/telephony interoperability communications system **2100** that facilitates horizontal/vertical communications in accordance with an innovative aspect. The system **2100** includes an IP network **2102** (e.g., the Internet) that interconnects a telephony management system **2104** with at least four radio systems **2106** which can be utilized at various levels and by various entities. For example, a first radio system **2108** supports a local police department, a second radio system **2110** supports a local fire department, a third radio system **2112** supports a state agency (e.g., state police), and a fourth radio system **2114** supports a federal agency (e.g., FEMA-federal emergency management agency). The telephony management system **2104** can create a session **2116** in which a radio operator (R_{LP}) from the local police, radio operator (R_{LF}) from the local fire department, radio operator (R_S) from the state agency (e.g., state police)

and a radio operator (R_F) from the federal agency (e.g., FEMA) can join to listen in and/or participate in the session at any time.

FIG. 22 illustrates a block diagram of an exemplary telephony management communications system **2200** in accordance with an innovative aspect. The telephony management system **2200** can be employed as a telephony conferencing manager for call conferencing, as desired. The system **2200** can include an application layer interface **2202** that provides exposure to overlying applications and underlying files **2204**, a conference manager **2206**, a quality-of-service (QoS) component **2208**, and an alerting component **2210**.

The system **2200** can include a communications framework **2212** via which the files **2204**, conference manager **2206**, (QoS) component **2208**, and an alerting component **2210** can interface to external networks (e.g., the Internet **2214**, a Wi-Fi network **2216**, a radio network **2218**, and/or a PSTN network **2220**). The files **2204** can be communicated directly through the framework **2212** to the Internet using an appropriate data transmission or sharing protocol. The conference manager **2206** can interface to the Internet **2214** and other networks via a SIP (session initiation protocol) component **2222** of the framework **2212**, and therefrom via an H.323 protocol to the Internet **2214** or other protocols, to exchange signaling information.

H.323 is an international standard for multimedia communications over packet-switched networks, including LANs, WANs, and the Internet. H.323 is an “umbrella” specification that includes the standards H.323, H.225.0, H.245, the H.450-series documents, and the H.460-series. H.323 allows for the use of T.120 protocols for data collaboration and file transfer. T.120 is data conferencing standard that provides real-time communication between two or more entities in a conference. Applications specified as part of the T.120 family can include application sharing, electronic white boarding, file exchange, and chat. T.120 may be used stand-alone or in conjunction with other protocols, such as H.323 and SIP.

SIP is an IETF (Internet Engineering Task Force) standard for the establishment of multimedia sessions, which can be used for audio, video, messaging (e.g., instant messaging) and/or other real-time data communication sessions. The scope of SIP is relatively broad, including the establishment of virtually any kind of session between two parties.

The scope of H.323 can cover real-time voice (e.g., VoIP), video, and data communications over packet-switched networks. H.323 is designed to operate over IP networks, primarily, though H.323 can also operate over other packet-switched networks. H.323 includes multipoint voice and video conferencing capabilities.

The conference manager **2206** can also interface to internal components of the framework **2212**. For example, signaling information can also be communicated to a voice controller component **2224** (e.g., an NMS natural access card by NMS Communications of Framingham, Mass.). Natural Access is a modular runtime and development environment for creating voice, fax, and call processing applications using NMS media processing platforms and can provide a consistent application programming interface (API) for integrating and presenting media and telecommunication capabilities to an application. Standard features include telephony call control, voice record and playback, tone detection and generation, and industry-standard H.100/H.110 switching support.

The conference manager **2206** can also interface to an internal media gateway component **2226** (e.g., fusion—an IP telephony API programming environment by NMS Communications) of the framework **2212**. The conference manager **2206** can communicate at least media control information to

the media gateway **2226**. The QoS component **2208** can also interface to the media gateway **2226** to communicate, measure and determine QoS information. The alerting component **2210** can interface to the framework **2212** for the communication of alerts and notifications, for example.

The communications framework **2212** can also include one or more voice cards **2228** (e.g., a model CG6565 card by NMS Communications, or other similar vendor models having similar capabilities) that facilitate the conversion of voice signals into voice data for transmission to the Internet **2214** via RTP (real-time transport protocol) technology. RTP can be employed to support streaming real-time multimedia over IP in packets (e.g., voice and video over packet-switched networks).

The framework **2212** can also provide other types of packet communications channels such as T1 (1.54 Mbps) and/or E1 (2.048 Mbps) to the PSTN **2220**. Thus, the system **2200** can facilitate communications to an IP phone **2230** for VoIP, a PDA **2232** in communications with the Wi-Fi network **2216**, push-to-talk devices **2234** (e.g., handheld radios) that communicate via the radio network **2218** (e.g. mesh radio networks for emergency and/or security services), and conventional telephones **2236** that connect to the PSTN system **2220**, for example.

FIG. 23 illustrates an exemplary radio band management component **2300** in accordance with an aspect of the invention. The band management component **2300** is generalized as being operational to accommodate multiple radio frequency bands (denoted BANDS 1-N, where N is an integer) that are typically employed by security and/or emergency services. For example, the band management component **2300** can include one, some, or all of radio subcomponents **2302** that can provide the radio network services for security and/or emergency personnel and operations. For example, the radio subcomponents **2302** can include county, city, state, police, fire, EMS, medical, federal, and any other radio subcomponent desired to N radio subcomponents.

The band management component **2300** can also include a band controller **2304** that facilitates control and/or selection of one or more of the radio subcomponents for intercommunications access. For example, if the telephony management component initiates a conference session for country and medical personnel, this can be communicated to the band controller **2304** to select the county and medical radio subcomponents for binding and interaction into the session.

The band management component **2300** can also include a first responder controller **2306** that facilitates control and/or selection of one or more of the first responder radio subcomponents for intercommunications access. For example, if the telephony management component initiates a conference session for police and EMS personnel, this can be communicated to the first responder controller **2306** to select the police and EMS radio subcomponents for binding and interaction into the session.

The band management component **2300** can also include a network interface component **2308** that facilitates communications over one or more different networks. For example, the interface component **2308** can facilitate communications over the PSTN, Internet, and/or cellular networks (e.g., GSM, UMTS, CDMA . . .) for access to the telephony management system and/or other access mechanisms (e.g., callers, computer access, and so on).

It is to be understood that many of the band management components **2300** can be networked together (e.g., via an IP network) utilizing the network interface component **2308**. For example, a local implementation can include a first band management component for police, a second band manage-

17

ment component for EMS, a third band management component for fire, and so on. Accordingly, each band management component can be controlled to select the desired radio sub-components to bind into a conference session.

FIG. 24 illustrates a methodology of creating a session and binding participants into a session in accordance with the subject innovation. At 2400, a list of session participants is received and stored, based on the occurrence of a predetermined event. For example, in the event that a major fire occurs, the list can include certain members of the fire department, police department, and medical facility. Thus, when an alarm is triggered at the fire department, a representative signal is transmitted to the telephony management system that initiates a conference session, calls the list of personnel, and binds the calls into a conference session during which the event and personnel can be monitored to some extent. Accordingly, at 2402, a check is made for an event or a representative trigger signal. At 2404, if the event has not occurred, flow is back to 2402 to continue checking for a trigger signal or event. At 2404, if the event has occurred, flow is to 2406, initiate a conference session. At 2408, the list of session participants associated with the event, are called. In the event that a participant is not reachable by telephone, alternative mechanisms available to the system are used to send notifications and alarms to the participant. At 2410, participant access rights associated with the session are processed. At 2412, called participants are bound into the conference session according to the session access rights. At 2414, event radio channels are accessed. At 2416, the accessed radio channels are bound into the session. At 2418, participant interaction can now occur based on the session access rights.

FIG. 25 illustrates a telephony management architecture 2500 that employs presence processing in accordance with an innovative aspect. One of the key requirements in dealing with any emergency situation is the ability to locate a first responder in an area. The notion of "presence" is well established in the Internet and cellular telephone community, but is completely non-existent in the mobile radio (e.g., PTT, or Push-To-Talk radio) community. Presence enables a caller to determine if the called party is in the area, signed-on to the network and what the contact parameters are. Closely allied with the concept of presence is the idea of notification when a party enters or leaves an area where presence is being recorded. Interoperability between military and civilian radios, telephones, cellular phones and other communication devices has been recognized as a vital need capability for natural disasters, attacks, and other related events where security and emergency personnel and assistance are needed. Radio interoperability between civilian and military handsets is currently plagued by at least the following deficiencies: modulation communications schemes such as AM and/or FM, different operational frequency bands, digital versus analog radios, and military spread spectrum and encryption techniques. Recently, Project 25—a narrow band, digital radio for Public Safety Systems was an attempt to arrive at a standard that all parties could use. These handsets proved to be extremely expensive and replacing all of the existing radios with P25 radios is a burden few municipalities can support.

Accordingly, the architecture 2500 includes a presence layer 2502 that facilitates monitoring and detecting the presence of a mobile radio user. Presence includes a database indicating participants, potential participants and their contact information.

18

Furthermore, an Automatic Speech Recognition (ASR) capability is provided that facilitates signaling by participants who are not equipped with a DTMF generating device.

Alerts/notifications/alarms provide the capability to send a message to interested parties about an event such as arrival of a participant, departure, scheduled activities, etc. An alarm is the "assured delivery" of a special notification indicating a state of heightened emergency. The architecture 2500 attempts to deliver an alarm through any and all possible channels and networks. For example, first responder alarms are never discarded until some delivery notification has been received.

The mechanism used to deliver a notification or alarm may ultimately involve any of the following: SMS message, MMS message, fax message, WAP push web page, recorded voice, video clip and e-mail, for example. In most cases, the business logic preparing an alarm or notification will be unaware of the final physical channel used to deliver the end result. Rendering of the message for each of these channels can require special processing. As indicated architecture provides a confirmed delivery receipt that may be used to notify the sender or as an audit trail, for example.

Each of the various networks associated with the architecture have a different convention for addressing participants engaged in a conference using this network or medium. The address abstraction is an object that can be used by any of the services to indicate the destination for delivery of a notification, alarm, or to manage the participation in a conference. As a participant moves from one network to another, the address object will modify its behavior to fit the requirements of the current network. Additionally, authentication provides a variety of mechanisms for use by services to authenticate participants.

The architecture 2500 also illustrates the use of an alerts layer 2504, a mail layer 2506, and a news layer 2508, each of which facilitate access to the corresponding information. The remaining aspects of the architecture 2500 have been described with respect to the telephony management communications system of FIG. 22.

FIG. 26 illustrates a system 2600 that employs a machine learning and reasoning (MLR) component as part of an artificial intelligence (AI) component 2602 that facilitates automating one or more features in accordance with the subject innovation. The subject invention (e.g., in connection with selection) can employ various MLR-based schemes for carrying out various aspects thereof. For example, a process for determining which mobile radio channels to select for a conference session can be facilitated via an automatic classifier system and process.

A classifier is a function that maps an input attribute vector, $x=(x_1, x_2, x_3, x_4, x_n)$, to a class label $class(x)$. The classifier can also output a confidence that the input belongs to a class, that is, $f(x)=confidence(class(x))$. Such classification can employ a probabilistic and/or statistical-based analysis (e.g., factoring into the analysis utilities and costs) to prognose or infer an action that a user desires to be automatically performed.

A support vector machine (SVM) is an example of a classifier that can be employed. The SVM operates by finding a hypersurface in the space of possible inputs that splits the triggering input events from the non-triggering events in an optimal way. Intuitively, this makes the classification correct for testing data that is near, but not identical to training data. Other directed and undirected model classification approaches include, e.g., naïve Bayes, Bayesian networks, decision trees, neural networks, fuzzy logic models, and probabilistic classification models providing different pat-

terns of independence can be employed. Classification as used herein also is inclusive of statistical regression that is utilized to develop models of priority.

As will be readily appreciated from the subject specification, the subject invention can employ classifiers that are explicitly trained (e.g., via a generic training data) as well as implicitly trained (e.g., via observing user behavior, receiving extrinsic information). For example, SVM's are configured via learning or training phase within a classifier constructor and feature selection module. Thus, the classifier(s) can be employed to automatically learn and perform a number of functions.

In one implementation, the MLR component can monitor channel selection and session aspects, and automate such aspects when similar events occur in the future. For example, if it is determined that although a list of participants has been pre-specified for such events, yet after repeated occurrence of the event or similar events, that certain mobile radio channels are inactive or not bound into a session, the MLR can automate this to not include these channels and/or participants when a similar future event occurs.

In another example, the MLR component can be configured to search other data sources for phone numbers and/or other related information when an expected participant cannot be reached. This can occur after repeated attempts to call and bind a participant into a session, for example. The MLR component of the AI component **2602** can also be employed to determine at what times data synchronization, searching, and other related system processing can occur, this in view of an event that just occurred. Thus, such processing should not be performed when an event is occurring in order to reserve system resources rather than deplete such resources for overhead-type operations, for example. These are only but a few examples of the flexibility that can be employed by the MLR component. The MLR component can also be applied to other aspects of the radio/telephony interoperability architecture, such as related to selecting a network or networks over which to communicate with session participants and/or radio networks (e.g., cellular, versus IP), choosing IP routes to take in case of network failures during a disaster or event (e.g., satellite versus land-based), and so on.

Referring now to FIG. 27, there is illustrated a block diagram of a computer operable to execute aspects of the disclosed architecture. In order to provide additional context for various aspects of the subject invention, FIG. 27 and the following discussion are intended to provide a brief, general description of a suitable computing environment **2700** in which the various aspects of the invention can be implemented. While the invention has been described above in the general context of computer-executable instructions that may run on one or more computers, those skilled in the art will recognize that the invention also can be implemented in combination with other program modules and/or as a combination of hardware and software.

Generally, program modules include routines, programs, components, data structures, etc., that perform particular tasks or implement particular abstract data types. Moreover, those skilled in the art will appreciate that the inventive methods can be practiced with other computer system configurations, including single-processor or multiprocessor computer systems, minicomputers, mainframe computers, as well as personal computers, hand-held computing devices, microprocessor-based or programmable consumer electronics, and the like, each of which can be operatively coupled to one or more associated devices.

The illustrated aspects of the invention may also be practiced in distributed computing environments where certain

tasks are performed by remote processing devices that are linked through a communications network. In a distributed computing environment, program modules can be located in both local and remote memory storage devices.

A computer typically includes a variety of computer-readable media. Computer-readable media can be any available media that can be accessed by the computer and includes both volatile and nonvolatile media, removable and non-removable media. By way of example, and not limitation, computer readable media can comprise computer storage media and communication media. Computer storage media includes both volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital video disk (DVD) or other optical disk storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by the computer.

Communication media typically embodies computer-readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism, and includes any information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. Combinations of the any of the above should also be included within the scope of computer-readable media.

With reference again to FIG. 27, there is illustrated an exemplary environment **2700** for implementing various aspects of the invention that includes a computer **2702**, the computer **2702** including a processing unit **2704**, a system memory **2706** and a system bus **2708**. The system bus **2708** couples system components including, but not limited to, the system memory **2706** to the processing unit **2704**. The processing unit **2704** can be any of various commercially available processors. Dual microprocessors and other multi-processor architectures may also be employed as the processing unit **2704**.

The system bus **2708** can be any of several types of bus structure that may further interconnect to a memory bus (with or without a memory controller), a peripheral bus, and a local bus using any of a variety of commercially available bus architectures. The system memory **2706** includes read only memory (ROM) **2710** and random access memory (RAM) **2712**. A basic input/output system (BIOS) is stored in a non-volatile memory **2710** such as ROM, EPROM, EEPROM, which BIOS contains the basic routines that help to transfer information between elements within the computer **2702**, such as during start-up. The RAM **2712** can also include a high-speed RAM such as static RAM for caching data.

The computer **2702** further includes an internal hard disk drive (HDD) **2714** (e.g., EIDE, SATA), which internal hard disk drive **2714** may also be configured for external use in a suitable chassis (not shown), a magnetic floppy disk drive (FDD) **2716**, (e.g., to read from or write to a removable diskette **2718**) and an optical disk drive **2720**, (e.g., reading a CD-ROM disk **2722** or, to read from or write to other high capacity optical media such as the DVD). The hard disk drive **2714**, magnetic disk drive **2716** and optical disk drive **2720**

can be connected to the system bus **2708** by a hard disk drive interface **2724**, a magnetic disk drive interface **2726** and an optical drive interface **2728**, respectively. The interface **2724** for external drive implementations includes at least one or both of Universal Serial Bus (USB) and IEEE 1394 interface technologies.

The drives and their associated computer-readable media provide nonvolatile storage of data, data structures, computer-executable instructions, and so forth. For the computer **2702**, the drives and media accommodate the storage of any data in a suitable digital format. Although the description of computer-readable media above refers to a HDD, a removable magnetic diskette, and a removable optical media such as a CD or DVD, it should be appreciated by those skilled in the art that other types of media which are readable by a computer, such as zip drives, magnetic cassettes, flash memory cards, cartridges, and the like, may also be used in the exemplary operating environment, and further, that any such media may contain computer-executable instructions for performing the methods of the invention.

A number of program modules can be stored in the drives and RAM **2712**, including an operating system **2730**, one or more application programs **2732**, other program modules **2734** and program data **2736**. All or portions of the operating system, applications, modules, and/or data can also be cached in the RAM **2712**. It is appreciated that the invention can be implemented with various commercially available operating systems or combinations of operating systems.

A user can enter commands and information into the computer **2702** through one or more wired/wireless input devices, e.g., a keyboard **2738** and a pointing device, such as a mouse **2740**. Other input devices (not shown) may include a microphone, an IR remote control, a joystick, a game pad, a stylus pen, touch screen, or the like. These and other input devices are often connected to the processing unit **2704** through an input device interface **2742** that is coupled to the system bus **2708**, but can be connected by other interfaces, such as a parallel port, an IEEE 1394 serial port, a game port, a USB port, an IR interface, etc.

A monitor **2744** or other type of display device is also connected to the system bus **2708** via an interface, such as a video adapter **2746**. In addition to the monitor **2744**, a computer typically includes other peripheral output devices (not shown), such as speakers, printers, etc.

The computer **2702** may operate in a networked environment using logical connections via wired and/or wireless communications to one or more remote computers, such as a remote computer(s) **2748**. The remote computer(s) **2748** can be a workstation, a server computer, a router, a personal computer, portable computer, microprocessor-based entertainment appliance, a peer device or other common network node, and typically includes many or all of the elements described relative to the computer **2702**, although, for purposes of brevity, only a memory storage device **2750** is illustrated. The logical connections depicted include wired/wireless connectivity to a local area network (LAN) **2752** and/or larger networks, e.g., a wide area network (WAN) **2754**. Such LAN and WAN networking environments are commonplace in offices, and companies, and facilitate enterprise-wide computer networks, such as intranets, all of which may connect to a global communication network, e.g., the Internet.

When used in a LAN networking environment, the computer **2702** is connected to the local network **2752** through a wired and/or wireless communication network interface or adapter **2756**. The adaptor **2756** may facilitate wired or wireless communication to the LAN **2752**, which may also

include a wireless access point disposed thereon for communicating with the wireless adaptor **2756**.

When used in a WAN networking environment, the computer **2702** can include a modem **2758**, or is connected to a communications server on the WAN **2754**, or has other means for establishing communications over the WAN **2754**, such as by way of the Internet. The modem **2758**, which can be internal or external and a wired or wireless device, is connected to the system bus **2708** via the serial port interface **2742**. In a networked environment, program modules depicted relative to the computer **2702**, or portions thereof, can be stored in the remote memory/storage device **2750**. It will be appreciated that the network connections shown are exemplary and other means of establishing a communications link between the computers can be used.

The computer **2702** is operable to communicate with any wireless devices or entities operatively disposed in wireless communication, e.g., a printer, scanner, desktop and/or portable computer, portable data assistant, communications satellite, any piece of equipment or location associated with a wirelessly detectable tag (e.g., a kiosk, news stand, restroom), and telephone. This includes at least Wi-Fi and Bluetooth™ wireless technologies. Thus, the communication can be a predefined structure as with a conventional network or simply an ad hoc communication between at least two devices.

Wi-Fi, or Wireless Fidelity, allows connection to the Internet from a couch at home, a bed in a hotel room, or a conference room at work, without wires. Wi-Fi is a wireless technology similar to that used in a cell phone that enables such devices, e.g., computers, to send and receive data indoors and out; anywhere within the range of a base station. Wi-Fi networks use radio technologies called IEEE 802.11x (a, b, g, etc.) to provide secure, reliable, fast wireless connectivity. A Wi-Fi network can be used to connect computers to each other, to the Internet, and to wired networks (which use IEEE 802.3 or Ethernet).

Wi-Fi networks can operate in the unlicensed 2.4 and 5 GHz radio bands. IEEE 802.11 applies to generally to wireless LANs and provides 1 or 2 Mbps transmission in the 2.4 GHz band using either frequency hopping spread spectrum (FHSS) or direct sequence spread spectrum (DSSS). IEEE 802.11a is an extension to IEEE 802.11 that applies to wireless LANs and provides up to 54 Mbps in the 5 GHz band. IEEE 802.11a uses an orthogonal frequency division multiplexing (OFDM) encoding scheme rather than FHSS or DSSS. IEEE 802.11b (also referred to as 802.11 High Rate DSSS or Wi-Fi) is an extension to 802.11 that applies to wireless LANs and provides 11 Mbps transmission (with a fallback to 5.5, 2 and 1 Mbps) in the 2.4 GHz band. IEEE 802.11g applies to wireless LANs and provides 20+Mbps in the 2.4 GHz band. Products can contain more than one band (e.g., dual band), so the networks can provide real-world performance similar to the basic 10BaseT wired Ethernet networks used in many offices.

Referring now to FIG. **28**, there is illustrated a schematic block diagram of an exemplary computing environment **2800** in accordance with the subject invention. The system **2800** includes one or more client(s) **2802**. The client(s) **2802** can be hardware and/or software (e.g., threads, processes, computing devices). The client(s) **2802** can house cookie(s) and/or associated contextual information by employing the invention, for example.

The system **2800** also includes one or more server(s) **2804**. The server(s) **2804** can also be hardware and/or software (e.g., threads, processes, computing devices). The servers **2804** can house threads to perform transformations by employing the invention, for example. One possible commu-

23

nication between a client **2802** and a server **2804** can be in the form of a data packet adapted to be transmitted between two or more computer processes. The data packet may include a cookie and/or associated contextual information, for example. The system **2800** includes a communication framework **2806** (e.g., a global communication network such as the Internet) that can be employed to facilitate communications between the client(s) **2802** and the server(s) **2804**.

Communications can be facilitated via a wired (including optical fiber) and/or wireless technology. The client(s) **2802** are operatively connected to one or more client data store(s) **2808** that can be employed to store information local to the client(s) **2802** (e.g., cookie(s) and/or associated contextual information). Similarly, the server(s) **2804** are operatively connected to one or more server data store(s) **2810** that can be employed to store information local to the servers **2804**.

FIG. 29 illustrates a schematic block diagram of an exemplary peer-to-peer environment **2900** in accordance with the subject invention. The system **2900** can include one or more devices, for example, a first device **2902** and a second device **2904**. The subject invention in combination with a peer-to-peer arrangement can facilitate the communications of alerts/notifications, and/or other content between such peer devices via the communications framework **2906** and by utilizing the teleconferencing aspect. For example, the first device **2902** can be a mobile radio and the second device **2904** can be a cell phone. Thus, the devices (**2902** and **2904**) can be telecommunication devices (e.g., cell phones) as well as computing devices (e.g., portable computers). The devices can also include corresponding device storage (**2908** and **2910**) that supports the storage of data, messages and/or programs.

What has been described above includes examples of the invention. It is, of course, not possible to describe every conceivable combination of components or methodologies for purposes of describing the subject invention, but one of ordinary skill in the art may recognize that many further combinations and permutations of the invention are possible. Accordingly, the invention is intended to embrace all such alterations, modifications and variations that fall within the spirit and scope of the appended claims. Furthermore, to the extent that the term “includes” is used in either the detailed description or the claims, such term is intended to be inclusive in a manner similar to the term “comprising” as “comprising” is interpreted when employed as a transitional word in a claim.

24

What is claimed is:

1. A method of providing communications, comprising:
 - receiving providing a mobile radio component that facilitates mobile radio communications;
 - processing access rights for each of the two or more session participants prior to granting access to the session;
 - creating the teleconferencing session for two or more session participants using a radio/telephony management component;
 - determining the presence of at least one of the two or more session participants; transmitting a message to the mobile radio component that selects a radio subcomponent;
 - connecting a mobile radio operator associated with the radio subcomponent to radio/telephony management component in response to receiving the message; and
 - binding the mobile radio operator into a teleconferencing session.
2. The method of claim 1, further comprising binding into the session a user who is associated with at least one of a city, county, state, police, fire, EMS, medical, and federal security and emergency entities.
3. The method of claim 1, further comprising managing two or more teleconferencing sessions substantially simultaneously.
4. The method of claim 1, wherein the message transmitted to the mobile radio operator is communicated over at least one of an IP network and a cellular network.
5. A system that facilitates communications, comprising:
 - means for receiving a mobile radio component that facilitates mobile radio communications;
 - means for creating a teleconferencing session for two or more session participants using a radio/telephony management component;
 - means for determining the presence of at least one of at least one of the two or more session participants;
 - means for transmitting a message to the mobile radio component that selects a radio subcomponent;
 - means for connecting a mobile radio operator associated with the radio subcomponent to radio/telephony management component in response to receiving the message;
 - means for processing access rights for each of the two or more session participants prior to granting access to the session; and
 - means for binding the mobile radio operator into a teleconferencing session.

* * * * *